

BESA HIU Test Report

Flow 8500 60 H


Modules Tested: 1, 2, 7 & 8

Client: Bosch Thermotechnik GmbH

Project Number: E4916 Report Issue: 2

24 June 2024

Prepared By:



Patrick Aunula – Project Engineer

Approved By:



Simon Broxham – Operations Manager



THIS PAGE IS INTENTIONALLY LEFT BLANK

DISCLAIMER

This report is confidential to the client named on the front cover.

This report may be stored, transmitted, or reproduced in full by the named client, however if the report is to be placed in the public domain or used for publicity / promotional purposes please inform a director of Enertek International Ltd.

The report must not be reproduced in part, edited, abridged or any extracts used for any purpose whatsoever without written permission from a director of Enertek International Ltd.

The client remains responsible for any data supplied by the client for use in this report. If this data could affect the test results this will be noted in the report.

Any test results contained in this report apply only to the specific sample(s) tested as described in the report.

This report does not imply or indicate any element of commercial approval, recommendation, or promotion by Enertek International Ltd.

Enertek's default decision rule is in accordance with ILAC-G8:09/2019 simple acceptance.

CONTENTS

1	EXECUTIVE SUMMARY	8
2	BRIEF.....	9
3	DEFINITIONS.....	10
4	INTRODUCTION	13
	4.1 Installation of Appliance	13
	4.2 Appliance Details	13
	4.3 Appliance Design Pressures and Temperatures	13
5	TEST METHOD	14
	5.1 Test Regime.....	14
6	TEST MODULE 1 – SPACE HEATING, HIGH TEMPERATURE, DH70 INDIRECT	16
	6.1 Test Module 1 Information.....	16
	6.2 Test Module 1 Results.....	16
7	TEST MODULE 2 – SPACE HEATING, LOW TEMPERATURE, DH55 INDIRECT	21
	7.1 Test Module 2 Information.....	21
	7.2 Test Module 2 Results.....	21
8	TEST MODULE 7 – DHW, HIGH TEMPERATURE, D70-KWARM	26
	8.1 Test Module 7 Information.....	26
	8.2 Test 11a Information	26
	8.3 Test 11a Results	27
	8.4 Test 12a / 12c Information	29
	8.5 Test 12a / 12c Results	29
	8.6 Test 13a Information	33
	8.7 Test 13a Results	33
	8.8 Test 21a Information	36
	8.9 Test 21a Results	36
	8.10 Test 22a Information	39
	8.11 Test 22a Results.....	39
9	TEST MODULE 8 – DHW, LOW TEMPERATURE, DH55-KWARM.....	41
	9.1 Test Module 8 Information.....	41
	9.2 Test 11b Information	41
	9.3 Test 11b Results.....	42
	9.4 Test 12b / 12d Information.....	44
	9.5 Test 12b / 12d Results.....	44
	9.6 Test 13b Information	48
	9.7 Test 13b Results.....	48
	9.8 Test 21b Information	51
	9.9 Test 21b Results.....	51
	9.10 Test 22b Information	54
	9.11 Test 22b Results.....	54
10	CONCLUSIONS	56
11	EQUIPMENT AND INSTRUMENT LIST	57
12	APPENDIX A.....	58
	12.1 VWARD Calculations for Modules 1 & 7	58
	12.2 VWARD Calculations for Modules 2 & 8	59

13	APPENDIX B.....	60
	13.1 Appliance Documentation.....	60
	13.2 Appliance Photographs	62
14	APPENDIX C.....	65
	14.1 UK Declaration of Conformity	65
	14.2 Water Regulation 4 Certificate	66
15	BIBLIOGRAPHY	67

List of Figures

Figure 1 - EIL's HIU Test Rig Schematic which is taken from Appendix B, Figure 4, of Technical Standard for UK HIU Test Regime Version 3: 2023	15
Figure 2 - Test 01a Key Metrics.....	18
Figure 3 - Test 01b Key Metrics.....	19
Figure 4 - Test 01c Key Metrics	20
Figure 5 - Test 01d Key Metrics.....	23
Figure 6 - Test 01e Key Metrics.....	24
Figure 7 - Test 01f Key Metrics	25
Figure 8 - Test 11a Key Metrics.....	28
Figure 9 - Test 12a Key Metrics.....	31
Figure 10 - Test 12c Key Metrics	32
Figure 11 - Test 13a Key Metrics.....	35
Figure 12 - Test 21a Key Metrics.....	38
Figure 13 - Test 22a Key Metrics.....	40
Figure 14 - Test 11b Key Metrics.....	43
Figure 15 - Test 12b Key Metrics.....	46
Figure 16 - Test 12d Key Metrics.....	47
Figure 17 - Test 13b Key Metrics.....	50
Figure 18 - Test 21b Key Metrics.....	53
Figure 19 - Test 22b Key Metrics.....	55
Figure 20 - HIU with Outer Case Fitted	62
Figure 21 - HIU with Outer Case Removed	63
Figure 22 - Nameplate with Model Details and Serial Number	64
Figure 23 - UK Declaration of Conformity.....	65
Figure 24 - Water Regulation 4 Certificate	66

List of Tables

Table 1 - Appliance Details and Modules Tested.....	8
Table 2 - Modules Tested Pass or Fail Summary.....	8
Table 3 - Modules 1 & 7 VWART Information.....	8
Table 4 - Modules 2 & 8 VWART Information.....	8
Table 5 - Definitions and Abbreviations.....	10
Table 6 - Appliance Details.....	13
Table 7 - Appliance Design Pressures and Temperatures.....	13
Table 8 - Module 1 Tests.....	16
Table 9 - Module 1 Performance Criteria	16
Table 10 - Module 1 Best Practice	16
Table 11 - Module 1 Test Results.....	17
Table 12 - Module 2 Tests.....	21
Table 13 - Module 2 Performance Criteria	21
Table 14 – Module 2 Best Practice.....	21
Table 15 - Module 2 Test Results.....	22
Table 16 - Module 7 Tests.....	26
Table 17 - Module 7, Test 11a Results	27
Table 18 - Module 7, Test 11a Performance Criteria.....	27
Table 19 – Module 7 – Test 11 Best Practice	27
Table 20 - Module 7, Test 12 Results.....	29
Table 21 - Module 7, Test 12 Performance Criteria.....	29
Table 22 – Module 7 – Test 12 Best Practice	30
Table 23 - Module 7, Test 13 Performance Criteria.....	33
Table 24 - Module 7, Test 13a Results	34
Table 25 - Module 7, Test 21a Results	36
Table 26 - Module 7, Test 21 Performance Criteria.....	36
Table 27 - Module 7 - Test 21 Best Practice	37
Table 28 - Module 7, Test 22a Results	39
Table 29 - Module 7, Test 22 Performance Criteria.....	39
Table 30 - Module 7 - Test 22 Best Practice	39
Table 31 - Module 8 Tests.....	41
Table 32 - Module 8, Test 11b Results.....	42
Table 33 - Module 8, Test 11b Performance Criteria.....	42
Table 34 - Module 8 - Test 11 Best Practice	42
Table 35 - Module 8, Test 12 Results	44
Table 36 - Module 8, Test 12 Performance Criteria.....	44
Table 37 - Module 8 - Test 12 Best Practice	45
Table 38 - Module 8, Test 13 Performance Criteria.....	48
Table 39 - Module 8, Test 13b Results.....	49
Table 40 - Module 8, Test 21b Results.....	51
Table 41 - Module 8, Test 21 Performance Criteria.....	51
Table 42 - Module 8 - Test 21 Best Practice	52
Table 43 - Module 8, Test 22b Results.....	54
Table 44 - Module 8, Test 22 Performance Criteria.....	54
Table 45 - Module 8 - Test 22 Best Practice	54
Table 46 - Appliance Documentation	60

1 EXECUTIVE SUMMARY

- 1.1.1 The Flow 8500 60 H HIU underwent testing to the BESA Technical Standard for UK HIU Test Regime, V3-Rev001 September 2023. Modules 1, 2, 7 & 8 were tested. Summary tables can be seen below, with further technical data shown in each respective test module chapter of this report. VWARD calculations can be found within APPENDIX A.

Table 1 - Appliance Details and Modules Tested

Manufacturer:	Bosch Thermotechnik GmbH
Model:	Flow 8500 60 H
Modules:	1, 2, 7, 8

Table 2 - Modules Tested Pass or Fail Summary

Module 1:	Pass
Module 2:	Pass
Module 7:	Pass
Module 8:	Pass

Table 3 - Modules 1 & 7 VWARD Information

	VWARD (°C)	Volume (m³)
DHW	14	23.8
Standby	39	23.2
Space Heating	37	43.9

	VWARD (°C)
Summer	26
Winter	31
Overall	29

Table 4 - Modules 2 & 8 VWARD Information

	VWARD (°C)	Volume (m³)
DHW	20	44.3
Standby	41	52.8
Space Heating	36	69.8

	VWARD (°C)
Summer	32
Winter	33
Overall	33

- 1.1.2 It should be noted that all VWARD figures are to within $\pm 2^{\circ}\text{C}$ tolerance.

2 BRIEF

- 2.1.1 EnerTek International Limited (EIL), were contracted to receive, install, and commission a production sample of the Flow 8500 60 H.
- 2.1.2 To perform the tasks required for assessing the efficiency of Domestic Hot Water (DHW) and Space Heating (SH) as per the BESA UK HIU BESA Technical Standard for UK HIU Test Regime, V3-Rev001 September 2023, a publicly available online test regime. This is here-on referred to as the Test Regime throughout this document.
- 2.1.3 To provide a report detailing the tests carried out and generated results in accordance with the Test Regime criteria, including calculations for Volume Weighted Average Return Temperatures (VWART).

3 DEFINITIONS

- 3.1.1 The following definitions and abbreviations which have been used within this report can be found in Table 5 below.

Table 5 - Definitions and Abbreviations

Symbol	Description
t_{10}	Temperature, primary source
t_{11}	Temperature, primary side flow connection
t_{12}	Temperature, primary side return connection
t_{21}	Temperature, space heating system return connection
t_{22}	Temperature, space heating system flow connection
t_{31}	Temperature, cold water supply
t_{32}	Temperature, domestic hot water flow from HIU
t_{b1}	Temperature, primary side bypass flow (for non-keep warm configuration)
t_{b2}	Temperature, primary side bypass return (for non-keep warm configuration)
q_1	Volume flow, primary side
q_2	Volume flow, space heating system
q_3	Volume flow, domestic hot water
P_{11}	Static pressure, primary side flow connection
P_{12}	Static pressure, primary side return connection
P_{21}	Static pressure, space heating system return connection
P_{22}	Static pressure, space heating system flow connection
P_{31}	Static pressure, cold water supply
P_{32}	Static pressure, domestic hot water flow from HIU
dP_1	Differential pressure, primary system across HIU
dP_2	Differential pressure, space heating system across HIU
dP_3	Differential pressure, domestic hot water across HIU
Q_{DHW}	Estimated annual energy demand per year for hot water
Q_{SH}	Estimated annual energy demand per year for space heating
n_{DHW}	Number of DHW events per year

H_1	Arithmetic mean of primary side power recorded during test
H_2	Arithmetic mean of space heating power recorded during test
H_3	Arithmetic mean of DHW power recorded during test
h_{DHW}	Annual hours that HIU is producing DHW
h_{SH}	Annual hours that HIU is producing space heating
h_{KWM}	Annual hours that HIU is in keep warm mode
h_{NKWM}	Annual hours that HIU is in non-keep warm mode
V_{DHW}	Volume of primary water recorded during and post-DHW test
V_{SH}	Volume of primary water recorded during space heating tests
V_{KWM}	Volume of primary water recorded during keep warm test
V_{NKWM}	Volume of primary water recorded during non-keep warm test
$Prop_{Summer}$	Proportion of year HIU is operating in “summer” mode
$Prop_{Winter}$	Proportion of year HIU is operating in “winter” mode
$VWART_{DHW}$	DHW Volume Weighted Average Return Temperature
$VWART_{SH}$	Space Heating Volume Weighted Average Return Temperature
$VWART_{KWM}$	Keep Warm Volume Weighted Average Return Temperature
$VWART_{NKWM}$	Non-Keep Warm Volume Weighted Average Return Temperature
$VWART_{WINTER}$	Annual Volume Weighted Average Return Temperature for Heating Period
$VWART_{SUMMER}$	Annual Volume Weighted Average Return Temperature for Non-Heating Period
$VWART_{HIU}$	Total Annual Volume Weighted Average Return Temperature
$W_{thermal}$	Thermal energy use
$W_{electrical}$	Electrical energy use
SH_{PROP}	Annual heating period
NSH_{PROP}	Annual non-space heating period
TMV	Thermostatic mixing valve
TRV	Temperature regulating valve
UFH	Underfloor heating
DHW	Domestic hot water
HIU	Heat interface unit

DPCV	Differential pressure control valve
DRV	Double regulating valve
SH	Space heating
UKAS	United Kingdom Accreditation Service
EIL	Enertek International Limited

4 INTRODUCTION

4.1 Installation of Appliance

4.1.1 The appliance was installed and commissioned (as received) and as defined in the product literature provided. Testing was carried out without further adjustment other than disabling the internal space heating pump and adjusting the setting of the SH and DHW set points through the user interface on the HIU controller to suit the conditions of the HIU test rig.

4.1.2 The HIU rig schematic is shown within Figure 1.

The HIU was commissioned in accordance with the technical manual / installation guide provided by Bosch Thermotechnik GmbH. The location of which can be found within the references section of this report.

4.2 Appliance Details

4.2.1 Details of the HIU Flow 8500 60 H appliance are given in Table 6. Photographs of the installed appliance are given in Figure 20, Figure 21 and Figure 22.

4.2.2 The UK declaration of conformity (CE or UKCA or equivalent) and water regulation 4 certificate can be found within APPENDIX C.

Table 6 - Appliance Details

Item	Description
Manufacturer	Bosch Thermotechnik
Model	Flow 8500 60 H
Serial Number	5570-379-000001-7735600744
Year of Manufacture	2023
DHW Priority	Yes
EUT Number	EUT 0676
Date Test Item Received	04/12/2023

4.3 Appliance Design Pressures and Temperatures

4.3.1 The maximum design pressures and temperatures of the Flow 8500 60 H appliance for the primary side and the secondary side for both Space Heating and DHW are given in Table 7.

Table 7 - Appliance Design Pressures and Temperatures

Item	Pressure (bar)	Differential Pressure (Bar)	Temperature (°C)
Primary Side	10	6	90
Secondary Side Space Heating	3	0.6	90
Secondary Side DHW	10	10	70

5 TEST METHOD

5.1 Test Regime

- 5.1.1 The testing described in this report was carried out in accordance with the test regime. The test regime outlines a series of static and dynamic tests to determine the performance of a HIU's DHW and SH functions. The test regime outlines the test method including the reporting of the results, the performance requirements and the VWART calculations.
- 5.1.2 Testing was carried out in accordance with Test Module 1.
- 5.1.3 Testing was carried out in accordance with Test Module 2.
- 5.1.4 Testing was carried out in accordance with Test Module 7.
- 5.1.5 Testing was carried out in accordance with Test Module 8.

5.2 Measurement & Uncertainties

- 5.2.1 All measurements and uncertainties adhere to the requirements stipulated in the BESA Test Regime. All measurements were sampled at a rate of 1 Hz for all tests.
- 5.2.2 The BESA uncertainties of measurement requirements are as follows:
- Differential Pressure, ± 1.0 kPa
 - Temperature, ± 0.1 °C
 - Volume Flow (≥ 0.06 l/s) ± 1.5 %
 - Volume Flow (< 0.06 l/s), ± 3.0 %

Note: the time constant for the temperature sensors is less than 1.5 s. The time constant for the differential pressure sensors is less than 5s.

- 5.2.3 EIL's reported uncertainty is based on a standard uncertainty by a coverage factor $K=2$, providing a level of confidence of approximately 95%. The uncertainty evaluation has been carried out in accordance with UKAS requirements. The EIL equipment list and uncertainties are given in shown within chapter 11.

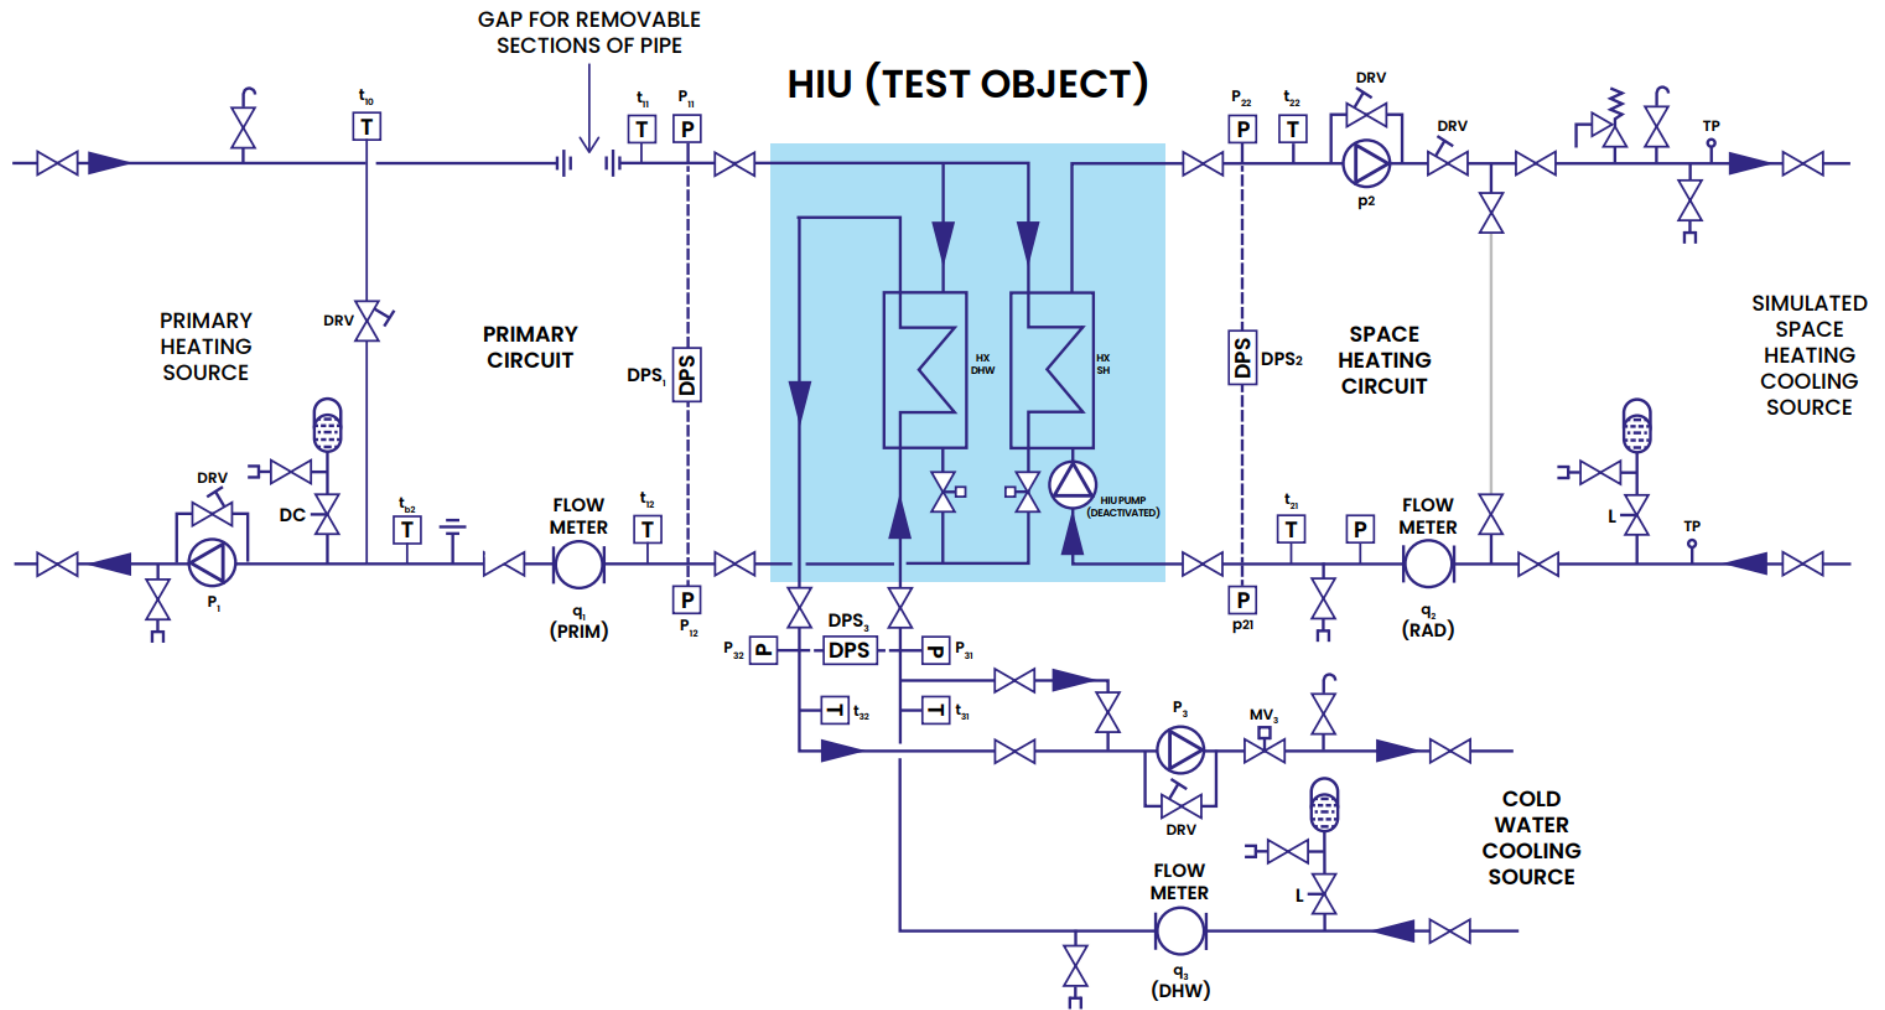


Figure 1 - EIL's HIU Test Rig Schematic which is taken from Appendix B, Figure 4, of Technical Standard for UK HIU Test Regime Version 3: 2023

6 TEST MODULE 1 – SPACE HEATING, HIGH TEMPERATURE, DH70 INDIRECT

6.1 Test Module 1 Information

6.1.1 Objective: Perform static testing to investigate the performance characteristics of the HIU when indirectly meeting a space-heating load given a 55°C/35°C tertiary heating circuit and 70°C primary flow temperature.

6.1.2 The following set of tests are from test module 1 – space heating, high temperature, indirect heating module 1-DH70 indirect HM1-DH70C.

Table 8 - Module 1 Tests

Module 1 Tests	
01a	DH/70C, Space Heating Indirect 0.5 kW, 55/35°C tertiary, 50 kPa
01b	DH/70C, Space Heating Indirect 1 kW, 55/35°C tertiary, 200 kPa
01c	DH/70C, Space Heating Indirect 4 kW, 55/35°C tertiary, 50 kPa

6.2 Test Module 1 Results

6.2.1 Performance criteria results can be seen in Table 9. Test result data can be seen in Table 11 and key metrics can be found in Figure 2, Figure 3 and Figure 4. Best practice criteria can be found in table 10.

Table 9 - Module 1 Performance Criteria

Module 1 Tests Performance Criteria	
Performance Criteria, Fail if:	PASS/FAIL
VWART (fail if the VWART is above 40°C)	Pass

Table 10 - Module 1 Best Practice

Module 1 – Best Practice Criteria	
Best Practice Criteria if:	Best Practice
VWART is below 37 °C	Not Achieved

Table 11 - Module 1 Test Results

Module 1 Test Results				
Parameter	Symbol	01a (0.5kW)	01b (1kW)	01c (4kW)
Temperature, primary side flow connection	t_{11} (°C)	70.0	69.7	70.2
Temperature, primary side return connection	t_{12} (°C)	36.6	36.4	38.0
Volume flow, primary side	q_1 (l/s)	0.0048	0.0082	0.033
Differential pressure, primary system across HIU	dP_1 (kPa)	52	203	51
Arithmetic mean of primary side power recorded during test	H_1 (W)	671.0	1146.1	4452.7
Temperature, space heating system return connection	t_{21} (°C)	34.8	35.1	35.0
Temperature, space heating system flow connection	t_{22} (°C)	55.0	54.7	54.8
Volume flow, space heating system	q_2 (l/s)	0.0056	0.012	0.052
Differential pressure, space heating system across HIU	dP_2 (kPa)	1	0	2
Arithmetic mean of space heating power during test	H_2 (W)	463.4	943.8	4319.8
Volume Weighted Avg. Return Temp	VWART (°C)	37	36	38
Overall VWART (°C)		37		

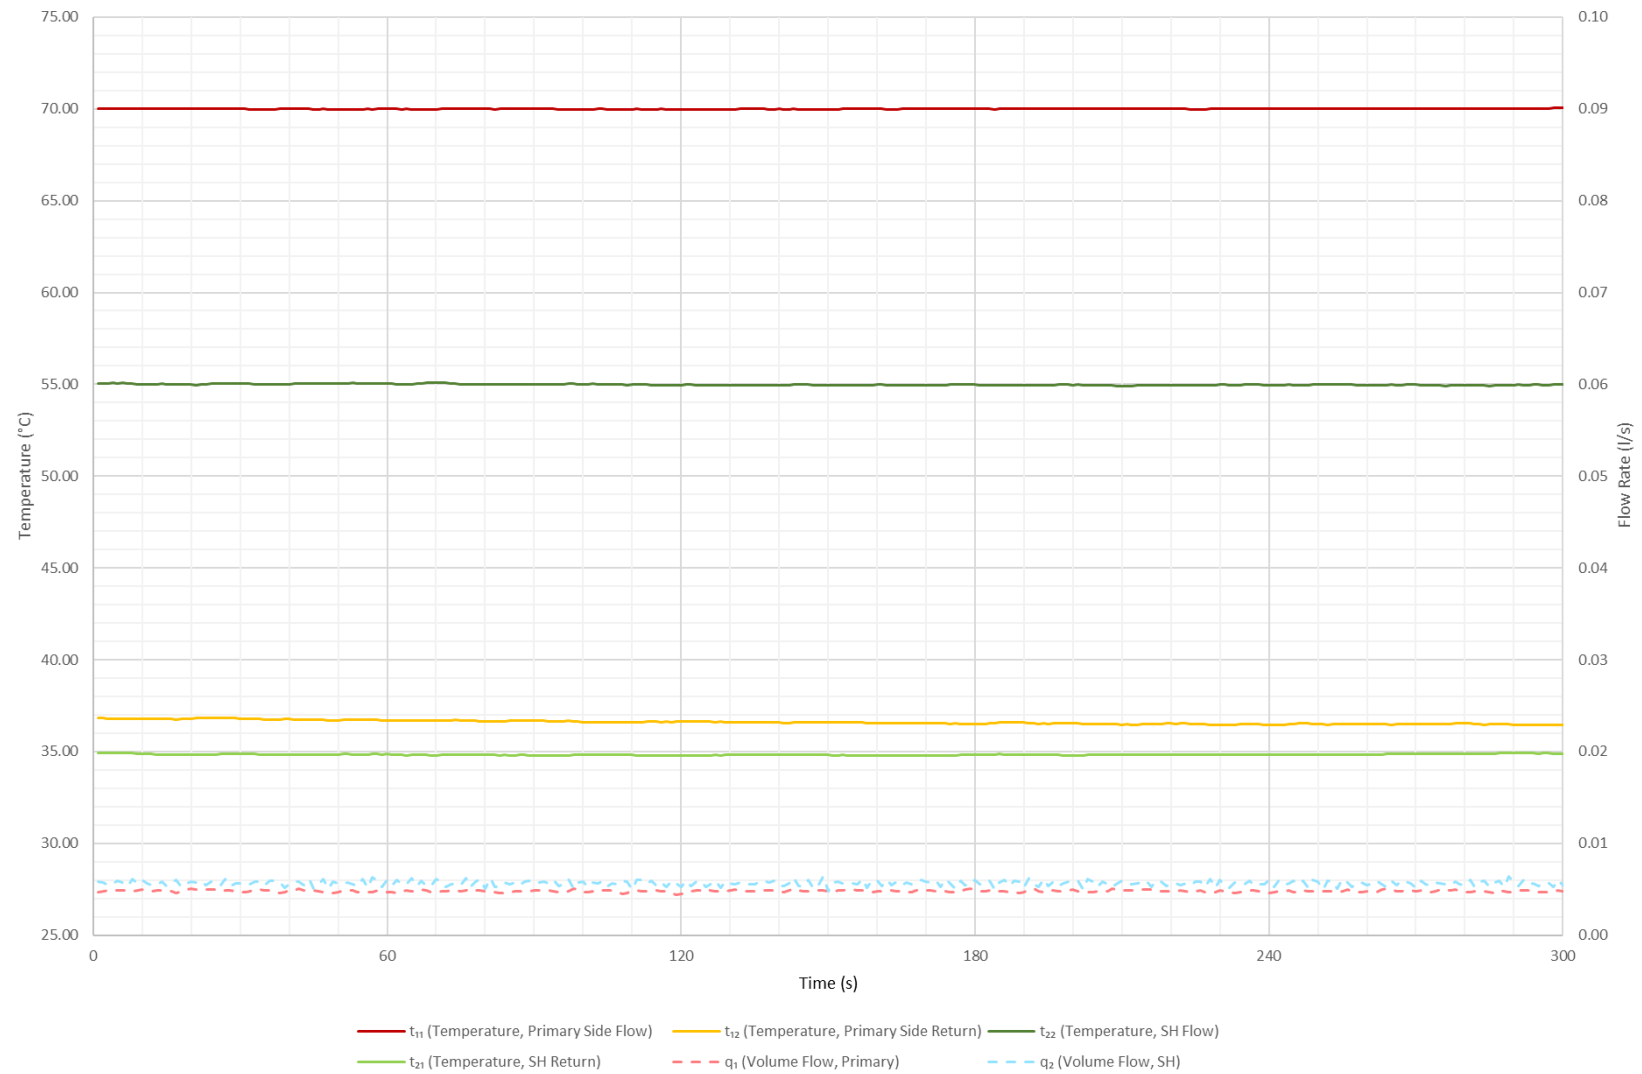


Figure 2 - Test 01a Key Metrics

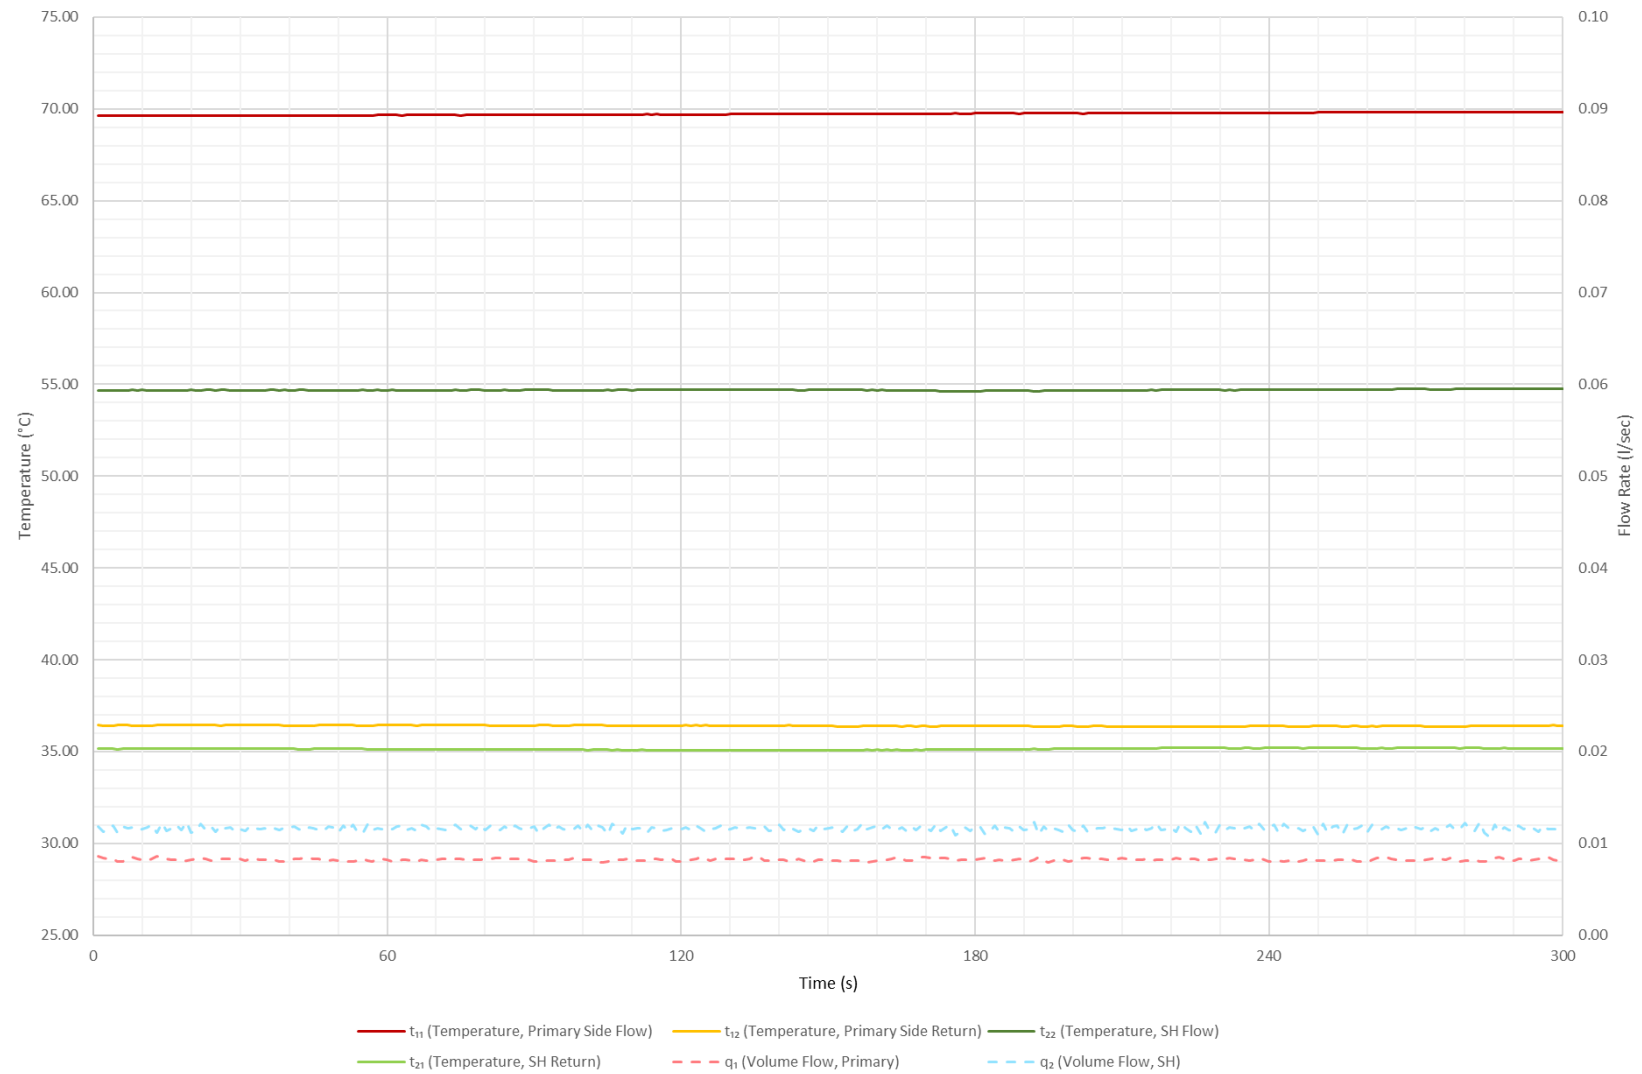


Figure 3 - Test 01b Key Metrics

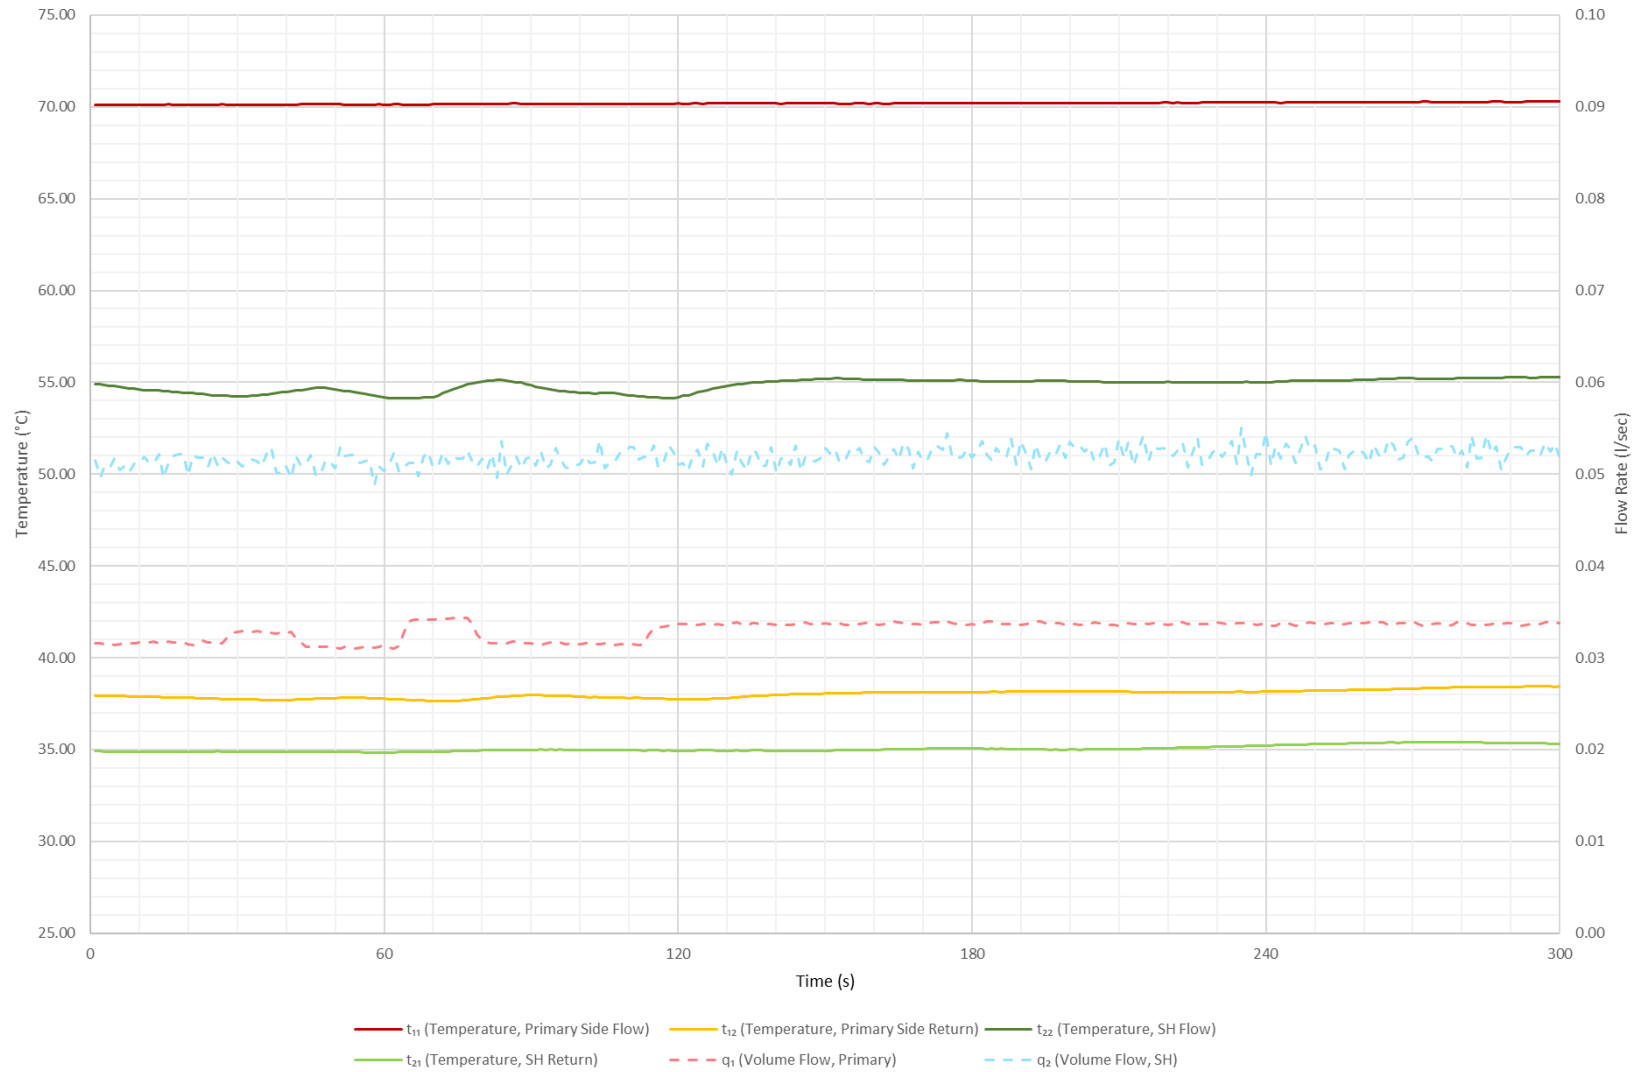


Figure 4 - Test 01c Key Metrics

7 TEST MODULE 2 – SPACE HEATING, LOW TEMPERATURE, DH55 INDIRECT

7.1 Test Module 2 Information

7.1.1 Objective: Perform static testing to investigate the performance characteristics of the HIU when indirectly meeting a space-heating load given a 45°C/35°C tertiary heating circuit and 55°C primary flow temperature.

7.1.2 The following set of tests are from test module 2 - Space Heating, Low Temperature, Indirect HEATING MODULE 2-DH55 Indirect HM2-DH55C

Table 12 - Module 2 Tests

Module 2 Tests	
01d	DH/55C, Space Heating Indirect 0.5 kW, 45/35°C tertiary, 50 kPa
01e	DH/55C, Space Heating Indirect 1 kW, 45/35°C tertiary, 200 kPa
01f	DH/55C, Space Heating Indirect 4 kW, 45/35°C tertiary, 50 kPa

7.2 Test Module 2 Results

7.2.1 Performance criteria results can be seen in Table 13. Test result data can be seen in Table 15 and key metrics can be found in Figure 5, Figure 6 and Figure 7. Best practice criteria can be found in table 14.

Table 13 - Module 2 Performance Criteria

Module 2 Tests Performance Criteria	
Performance Criteria, Fail if:	PASS/FAIL
VWART (fail if the VWART is above 40°C)	Pass

Table 14 – Module 2 Best Practice

Module 2 – Best Practice Criteria	
Best Practice Criteria if:	Best Practice
VWART is below 37 °C	Achieved

Table 15 - Module 2 Test Results

Module 2 Test Results				
Parameter	Symbol	01d (0.5kW)	01e (1kW)	01f (4kW)
Temperature, primary side flow connection	t_{11} (°C)	54.6	55.0	55.3
Temperature, primary side return connection	t_{12} (°C)	35.2	35.8	36.7
Volume flow, primary side	q_1 (l/s)	0.0071	0.013	0.049
Differential pressure, primary system across HIU	dP_1 (kPa)	57	203	51
Arithmetic mean of primary side power recorded during test	H_1 (W)	573.5	1029.8	3824.6
Temperature, space heating system return connection	t_{21} (°C)	35.4	35.4	35.2
Temperature, space heating system flow connection	t_{22} (°C)	44.7	45.0	44.6
Volume flow, space heating system	q_2 (l/s)	0.012	0.023	0.097
Differential pressure, space heating system across HIU	dP_2 (kPa)	2	1	6
Arithmetic mean of Space heating power during test	H_2 (W)	464.3	940.8	3864.2
Volume Weighted Avg. Return Temp	VWART (°C)	35	36	37
Overall VWART (°C)		36		

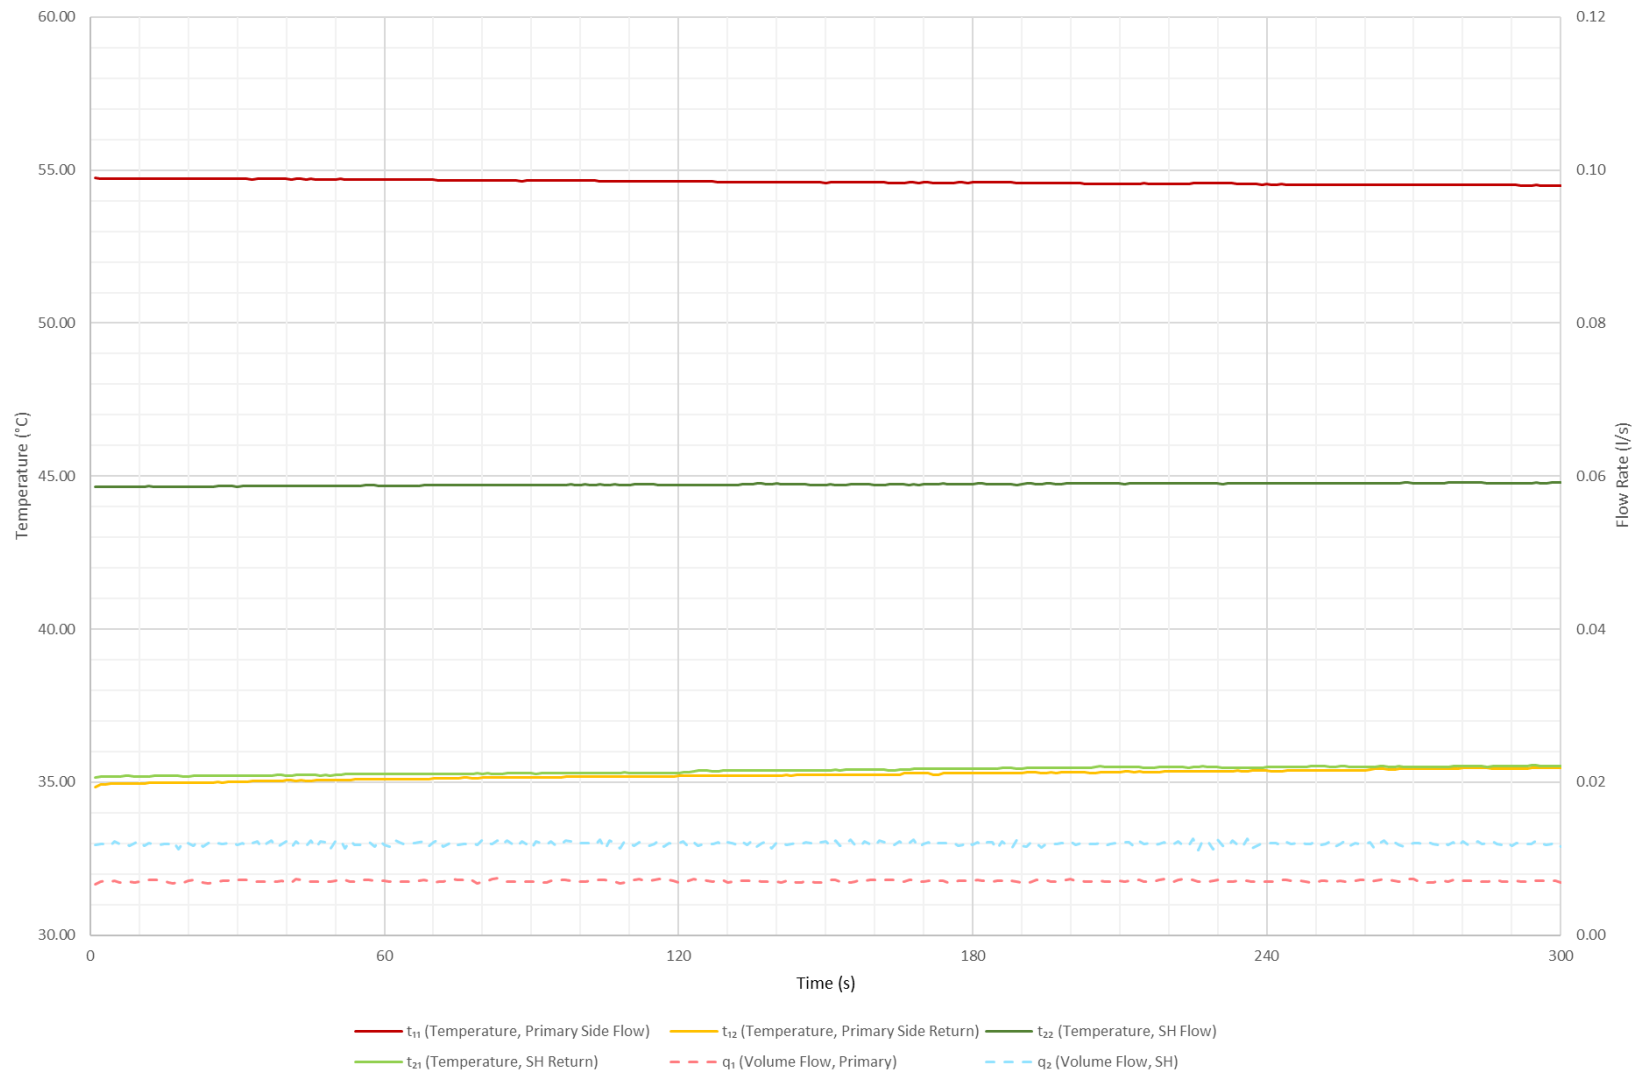


Figure 5 - Test 01d Key Metrics

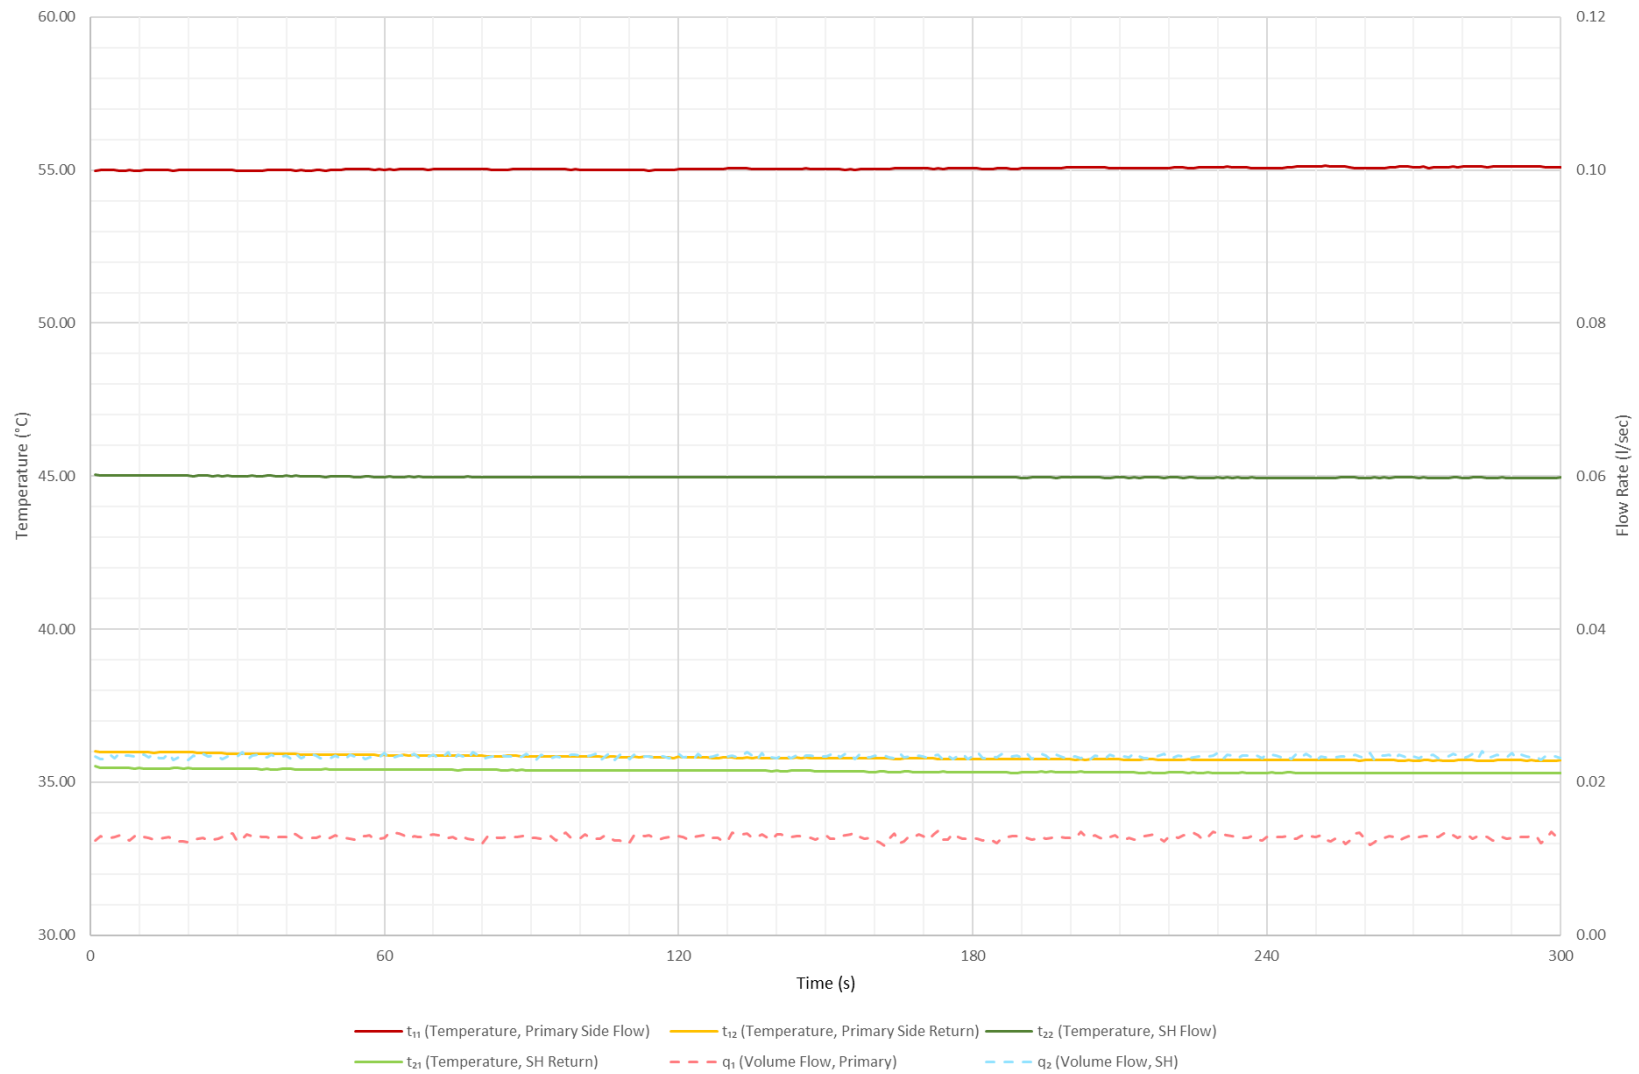


Figure 6 - Test 01e Key Metrics

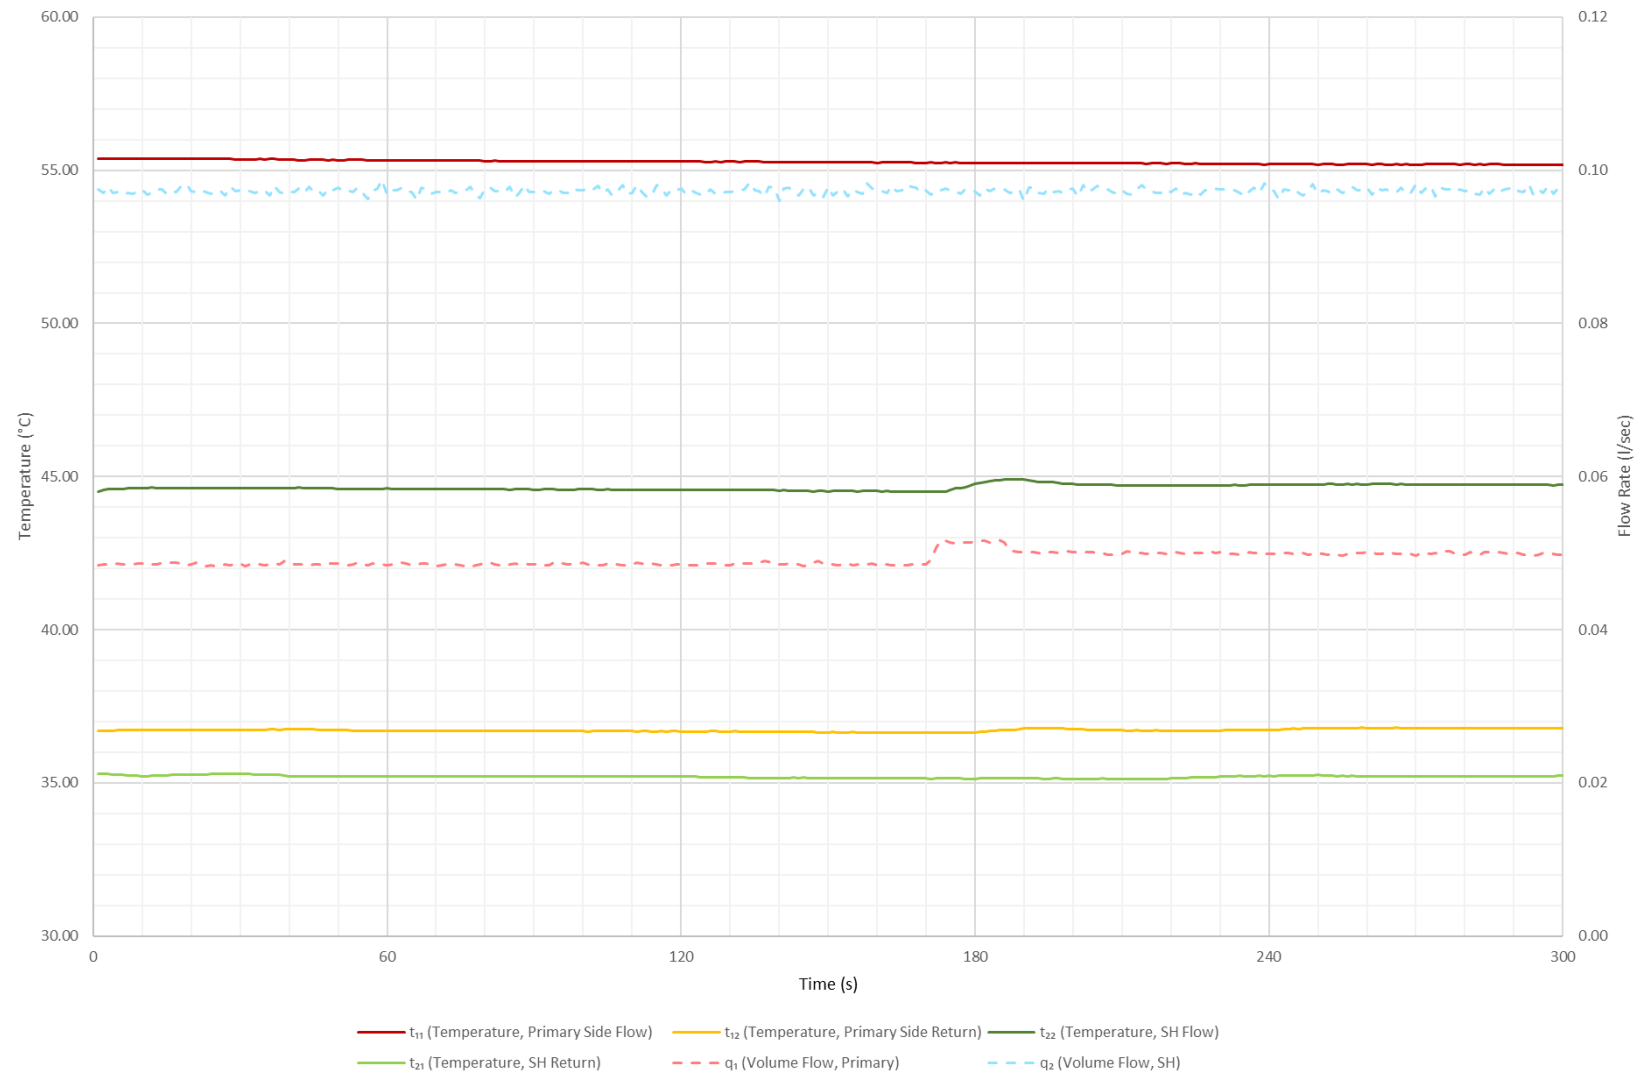


Figure 7 - Test 01f Key Metrics

8 TEST MODULE 7 – DHW, HIGH TEMPERATURE, D70-KWARM

8.1 Test Module 7 Information

8.1.1 Objective: To explore the performance of the HIU under changing loads, as would be the case in practical operation. Key performance criteria are speed and consistency of DHW delivery to the customer; DHW staying at a safe temperature at all times and the volume weighted average return temperature when supplying space heating or DHW.

8.1.2 The following set of tests are from test module 7 – Domestic hot water, high temperature, keep warm hot water module 7-DH70-KWarm.

Table 16 - Module 7 Tests

Module 7 Tests	
11a	DH/70C, DHW only, 50°C DHW, Variable dP
12a	DH/70C, DHW Low Flow, 50°C DHW, 50kPa
12c	DH/70C, DHW Low Flow, 50°C DHW, 200kPa
13a	DH/70C, DHW Load Test, 50°C DHW
21a	DH/70C, DHW Keep Warm, 50°C DHW
22a	DH/70C, DHW Keep Warm Response Time, 50°C DHW

8.2 Test 11a Information

8.2.1 Objective: To investigate the performance of the HIU when delivering DHW, at a range of flow rates and differential pressures, given a 70°C primary flow temperature. The test investigates HIU operation in terms of DHW delivery and impacts on primary heat network return temperatures.

8.3 Test 11a Results

- 8.3.1 Performance criteria results can be seen in Table 18. Test result data can be seen in Table 17 and key metrics can be found in Figure 8. Best practice criteria can be found in table 19.

Table 17 - Module 7, Test 11a Results

Module 7 - Test 11a Results			
Parameter	Symbol	Result	
Maximum and minimum values of t_{32} when there is DHW flow	t_{32} (°C)	57.0	38.5
Number of consecutive seconds where $t_{32} > 55^{\circ}\text{C}$	(s)	10	
Volume Weighted Avg. Return Temp	VWART (°C)	14	

Table 18 - Module 7, Test 11a Performance Criteria

Module 7 - Test 11a Performance Criteria	
Performance Criteria, Fail if:	PASS/FAIL
Fail if DHW temperature (t_{32}) exceeds 60.0°C (to one decimal place) for more than 1 second, as this poses a scalding risk	Pass
Fail if primary return temperature (t_{12}) exceeds 55.0°C (to one decimal place) at any point, as this poses a scaling risk	Pass
Fail if the VWART is above 22°C (to one decimal place)	Pass
Fail if the average DHW temperature (t_{32}) is not $50.0^{\circ}\text{C} \pm 1^{\circ}\text{C}$ (to one decimal place) for the final 150 seconds of each of the 180 second DHW flow periods	Pass
Fail if the DHW temperature (t_{32}) is not being maintained at $50.0^{\circ}\text{C} \pm 3^{\circ}\text{C}$ (to one decimal place) for >150 seconds of each of the DHW flow periods	Pass
Fail if the DHW temperature (t_{32}) drops below 45.0°C (to one decimal place) for more than 5 consecutive seconds, as this would impact resident comfort	Pass

Table 19 – Module 7 – Test 11 Best Practice

Module 7 – Test 11 – Best Practice Criteria	
Best Practice Criteria if:	Best Practice
Best practice if the VWART is less than 17°C (to one decimal place)	Achieved
Best practice if the DHW temperature (t_{32}) is being maintained at $50.0^{\circ}\text{C} \pm 2^{\circ}\text{C}$ throughout periods of DHW flow	Not Achieved
Best practice if the DHW temperature (t_{32}) doesn't drop below 45.0°C (to one decimal place) for more than 2 consecutive seconds	Not Achieved

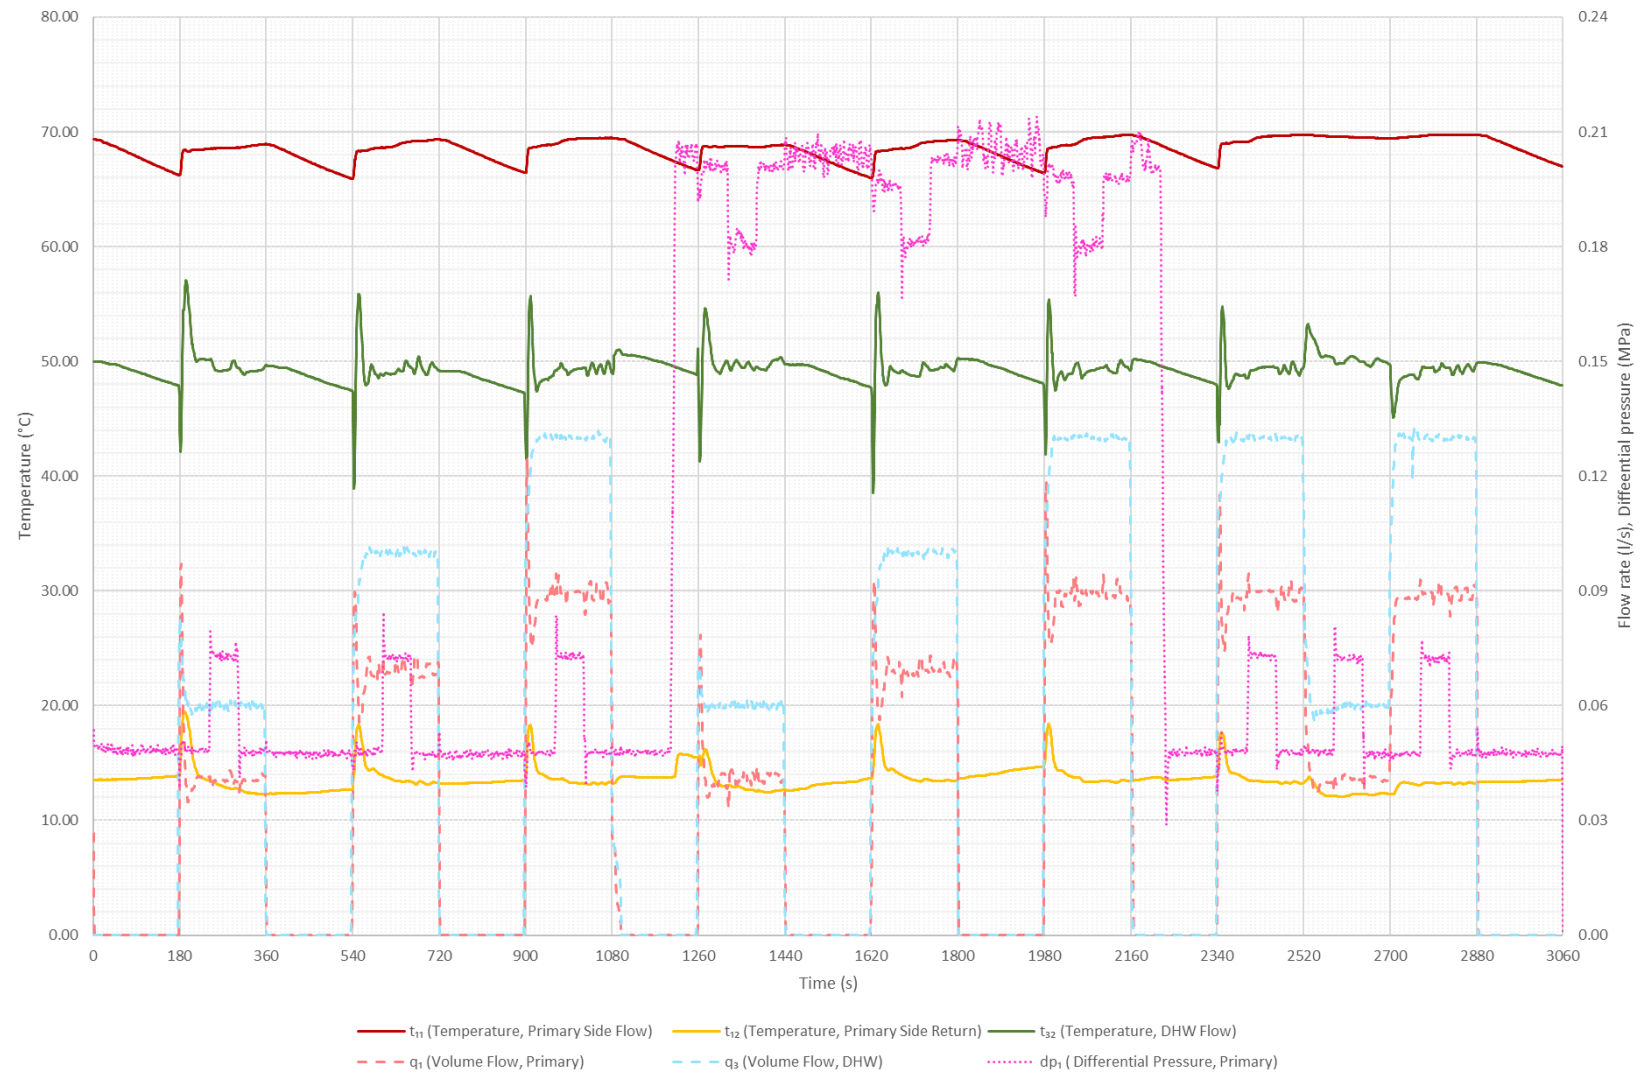


Figure 8 - Test 11a Key Metrics

8.4 Test 12a / 12c Information

- 8.4.1 Objective: To investigate the stability of DHW temperature at low flow rates. During operation, domestic hot water is sometimes drawn off at extremely low flow rates. Test 12 investigates the ability of the system to meet this condition by measuring the temperature at test point t_{32} at a flow rate of 0.02 l/s.

8.5 Test 12a / 12c Results

- 8.5.1 The HIU was able to deliver DHW at low flow rate above 45.0°C at the end of the 180 second period of low flow DHW.
- 8.5.2 The HIU was able to deliver stable DHW flow temperature (at t_{32}), defined as ability to maintain 50.0 ±3.0°C (1 decimal place) during the last 60 seconds of the test.
- 8.5.3 Performance criteria results can be seen in Table 21. Test result data can be seen in Table 20 and key metrics can be found in Figure 9 and Figure 10. Best practice criteria can be found in table 22.

Table 20 - Module 7, Test 12 Results

Module 7 - Test 12 Results					
Parameter	Symbol	12a Result		12c Result	
Maximum and minimum values of t_{32} when there is low DHW flow	t_{32} (°C)	56.1	48.3	56.2	48.4
Number of consecutive seconds where $t_{32} > 55^{\circ}\text{C}$	(s)	12		16	

Table 21 - Module 7, Test 12 Performance Criteria

Module 7 - Test 12 Performance Criteria	
Performance Criteria, Fail if:	PASS/FAIL
Fail if DHW temperature (t_{32}) exceeds 60.0°C (to one decimal place) for more than 1 second, as this poses a scalding risk	Pass
Fail if primary return temperature (t_{12}) exceeds 55.0°C (to one decimal place) at any point, as this poses a scaling risk	Pass
Fail if DHW temperature (t_{32}) is not maintained at 50°C ±3°C (to one decimal place) for more than 60 seconds	Pass

Table 22 – Module 7 – Test 12 Best Practice

Module 7 – Test 12 – Best Practice Criteria	
Best Practice Criteria if:	Best Practice
Best practice if DHW temperature (t32) is maintained at 50°C $\pm 2^\circ\text{C}$ (to one decimal place) throughout the test for both test 12a and 12c.	Not Achieved

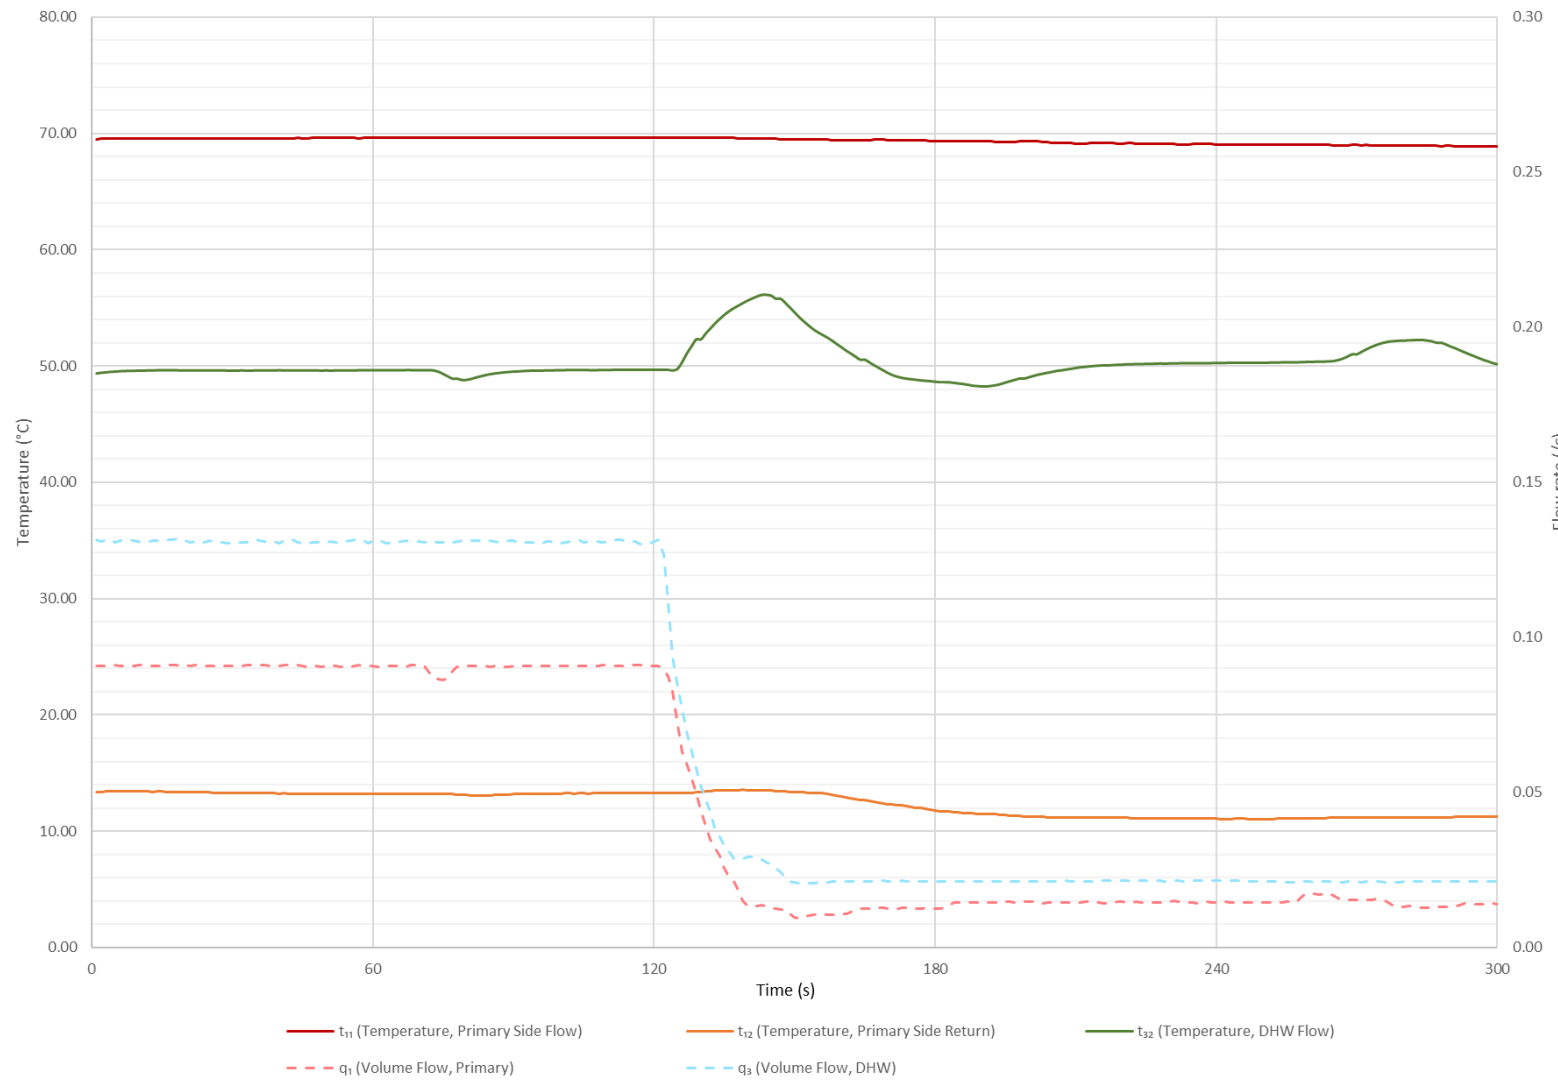


Figure 9 - Test 12a Key Metrics

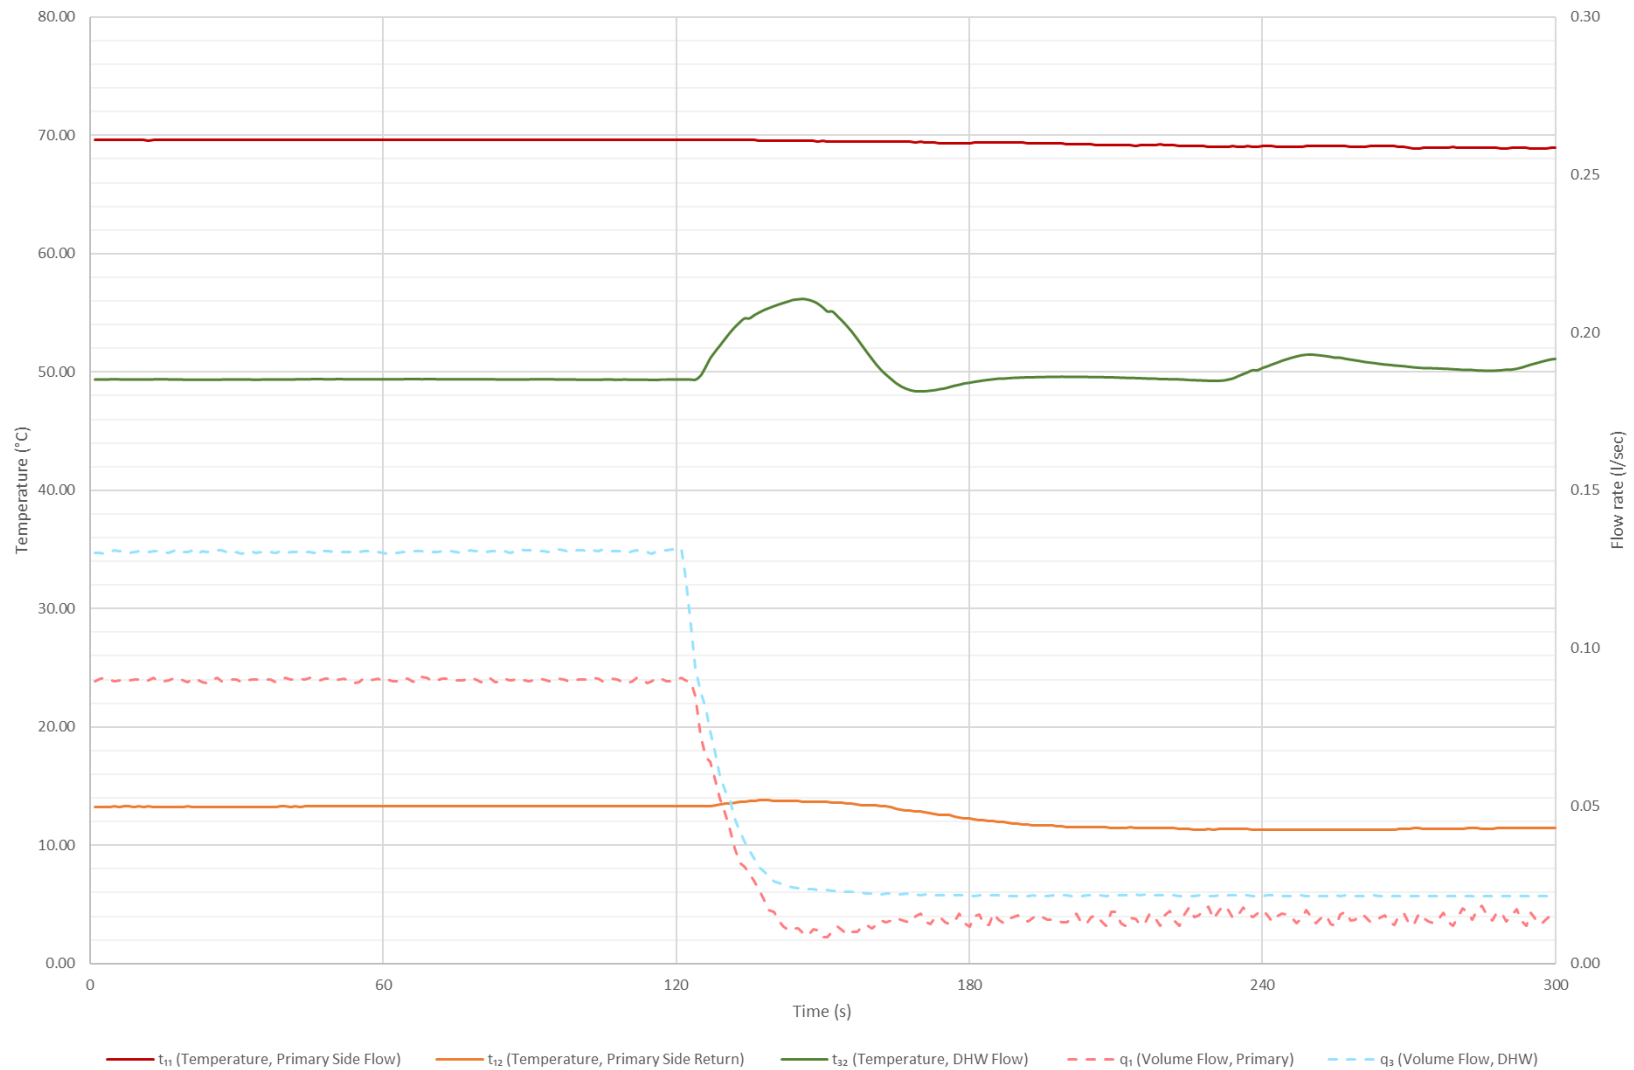


Figure 10 - Test 12c Key Metrics

8.6 Test 13a Information

- 8.6.1 Objective: To measure the maximum heat output (kW) and flow (l/sec) DHW output that can be delivered from the HIU. The HIU shall be set to deliver 50°C and the maximum DHW power output shall be measured with a flow step change and the peak value recorded when the DHW flow temperature is above 45°C.

8.7 Test 13a Results

- 8.7.1 The maximum DHW heat output was recorded as 61.6 kW, with a measured flow rate of 0.27 l/s, when producing minimum DHW at 45°C or above (Temperature achieved at final step 49.0 °C).
- 8.7.2 The recorded DHW line pressure drop across the HIU was 176 kPa.
- 8.7.3 The number of consecutive seconds where $t_{32} > 55^{\circ}\text{C}$ was 0 seconds.
- 8.7.4 Performance criteria results can be seen in Table 23. Test result data can be seen in Table 24 and key metrics can be found in Figure 11.

Table 23 - Module 7, Test 13 Performance Criteria

Module 7 - Test 13 Performance Criteria	
Performance Criteria, Fail if:	PASS / FAIL
Fail if DHW (at t_{32}) is less than $50^{\circ}\text{C} \pm 1.0^{\circ}\text{C}$ (to one decimal place) at 0.13 l/s flow rate, as the HIU must be able to produce DHW to the target temperature at a moderate load	Pass
Fail if DHW temperature (t_{32}) exceeds 60.0°C (to one decimal place) for more than 1 second, as this poses a scalding risk	Pass
Fail if primary return temperature (t_{12}) exceeds 55.0°C (to one decimal place) at any point, as this poses a scaling risk	Pass

- 8.7.5 The flow 8500 range of HIU's have flow limiters on the primary circuit, this meant the max output test reached a point in which the primary flow couldn't increase anymore. Once this point was reached another step was ran to show that the power output would be similar and then the test was stopped.

Table 24 - Module 7, Test 13a Results

Module 7 - Test 13a Results – Mean Average of Last 10 Seconds											
Parameter	Symbol	0.15 l/s (25kW)	0.18 l/s (30kW)	0.21 l/s (35kW)	0.24 l/s (40kW)	0.27 l/s (45kW)	0.30 l/s (50kW)	0.33 l/s (55kW)	0.36 l/s (60kW)	0.39 l/s (65kW)	0.42 l/s (70kW)
Temperature, primary side flow connection	t_{11} (°C)	69.5	69.8	69.8	69.9	69.9	69.9	69.9	69.9	69.7	69.5
Temperature, primary side return connection	t_{12} (°C)	13.3	13.4	13.8	14.2	14.6	14.8	15.2	15.1	14.9	15.3
Volume flow, primary side	q_1 (l/s)	0.106	0.128	0.149	0.171	0.194	0.214	0.243	0.261	0.264	0.271
Arithmetic mean of primary side power recorded during test	H_1 (kW)	25.0	30.2	34.9	39.8	44.9	49.4	55.8	59.7	60.6	61.6
Temperature, cold water supply	t_{31} (°C)	10.2	10.0	10.0	10.1	10.1	10.2	9.8	9.9	10.0	10.0
Temperature, domestic hot water flow from HIU	t_{32} (°C)	49.4	50.1	50.2	50.1	50.1	49.9	50.5	49.6	48.4	49.0
Volume flow, domestic hot water	q_3 (l/s)	0.155	0.184	0.214	0.244	0.274	0.303	0.332	0.362	0.391	0.424
Differential pressure, domestic hot water across HIU	dP_3 (kPa)	31	41	54	68	84	103	123	153	173	176
Arithmetic mean of DHW power recorded during test	H_3 (kW)	25.5	31.0	36.0	41.0	45.9	50.6	56.7	60.2	61.3	62.1

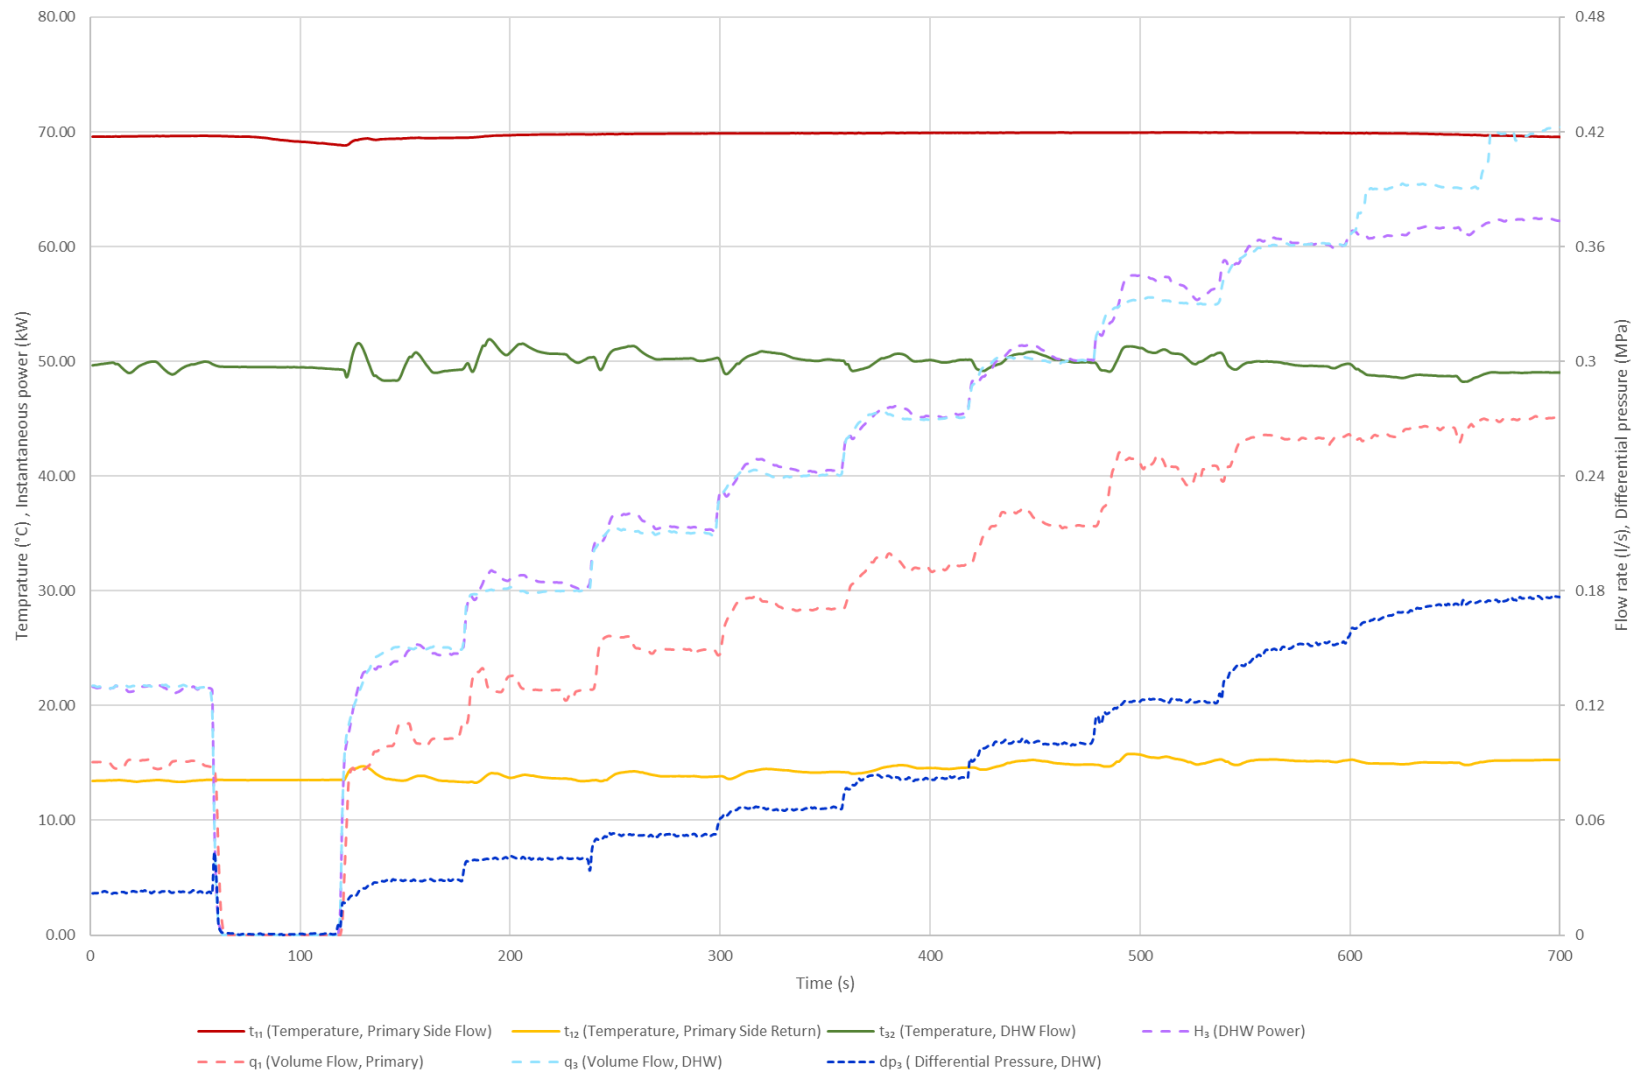


Figure 11 - Test 13a Key Metrics

8.8 Test 21a Information

- 8.8.1 Objective: To establish HIU performance during periods of no load, when operating in Keep Warm mode.

8.9 Test 21a Results

- 8.9.1 The Keep Warm operation is valid (based on Test 22a response time criteria).
- 8.9.2 The Keep Warm undergoes cycling (i.e. t_{11} varies by more than ± 3 °C during the final 3 hours of the test).
- 8.9.3 Performance criteria results can be seen in Table 26. Test result data can be seen in Table 25 and key metrics can be found in Figure 12. Best practice criteria can be found in table 27.

Table 25 - Module 7, Test 21a Results

Module 7 - Test 21a Results		
Parameter	Symbol	Result
Mean average volume flow, primary side	q_1 (l/s)	0.0009
Mean average of primary side power recorded during test	H_1 (kW)	0.03
Mean average electrical energy use	$W_{\text{electrical}}$ (W)	2.6
Mean average thermal energy use	W_{thermal} (W)	33.3
Overall energy loss per day	(kWh)	0.860
Overall keep warm volume weighted avg. return temp	VWART (°C)	39

Table 26 - Module 7, Test 21 Performance Criteria

Module 7 - Test 21 Performance Criteria	
Performance Criteria, Fail if:	PASS/FAIL
Fail if VWART is above 44°C (to one decimal place)	Pass
Fail if primary return temperature (t_{12}) exceeds 55.0°C (to one decimal place) at any point, as this poses a scaling risk	Pass
Fail if the primary supply temperature to the HIU (t_{11}) drops to below 39°C	Pass
Fail if the HIU overall energy losses are greater than 1.0 kWh/day (to three decimal places)	Pass
Fail if the Test 22a DHW temperature response time test fails (i.e. the HIU Keep Warm operation is not a valid Keep Warm)	Pass

Table 27 - Module 7 - Test 21 Best Practice

Module 7 – Test 21 – Best Practice Criteria	
Best Practice Criteria if:	Best Practice
Best practice if VWART is below 38°C (to one decimal place)	Not Achieved
Best practice if HIU overall energy losses are less than 0.7 kWh/day (to three decimal places)	Not Achieved

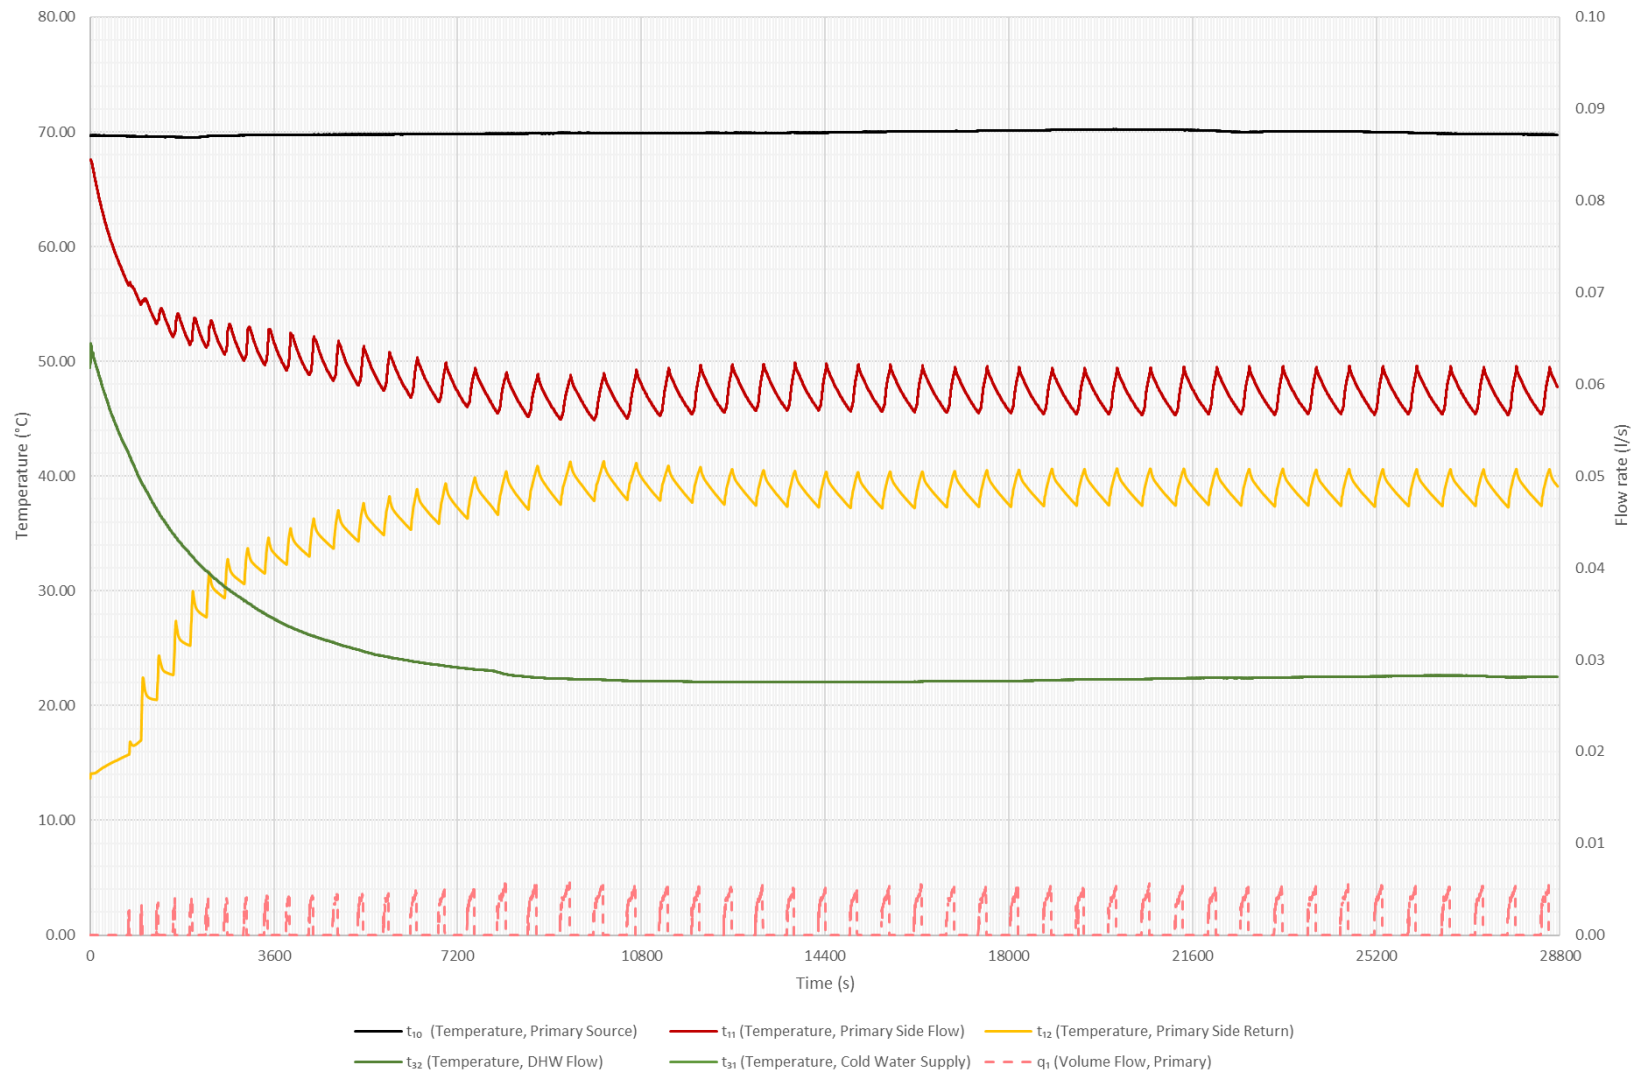


Figure 12 - Test 21a Key Metrics

8.10 Test 22a Information

- 8.10.1 Objective: To investigate DHW delivery time after a period of at least 8 hours Keep Warm only operation. This tests if the HIU can supply domestic hot water within an acceptable time of turning on the tap, which is a basic comfort requirement.

8.11 Test 22a Results

- 8.11.1 The Keep Warm operation is valid (based on response time criteria shown in Test 22 performance criteria).
- 8.11.2 Performance criteria results can be seen in Table 29. Test result data can be seen in Table 28 and key metrics can be found in Figure 13. Best practice criteria can be found in table 10.

Table 28 - Module 7, Test 22a Results

Module 7 - Test 22a Results		
Parameter	Symbol	Result
Time taken for t_{32} to reach 45.0°C and not subsequently drop below 42.0°C	(s)	9
Number of consecutive seconds where $t_{32} > 55^{\circ}\text{C}$	(s)	0
Mean average volume flow, primary side	q_1 (l/s)	0.111

Table 29 - Module 7, Test 22 Performance Criteria

Module 7 - Test 22 Performance Criteria	
Performance Criteria, Fail if:	PASS/FAIL
Fail if the DHW response time takes more than 15 seconds to reach 45.0°C (to one decimal place) at t_{32} while not dropping below 42.0°C (to one decimal place) thereafter	Pass
Fail if DHW temperature (t_{32}) exceeds 60.0°C (to one decimal place) for more than 1 second, as this poses a scalding risk	Pass
Fail if primary return temperature (t_{12}) exceeds 55.0°C (to one decimal place) at any point, as this poses a scaling risk	Pass

Table 30 - Module 7 - Test 22 Best Practice

Module 7 – Test 22 – Best Practice Criteria	
Best Practice Criteria if:	Best Practice
Best practice if DHW response time at t_{32} is less than 10 seconds	Achieved

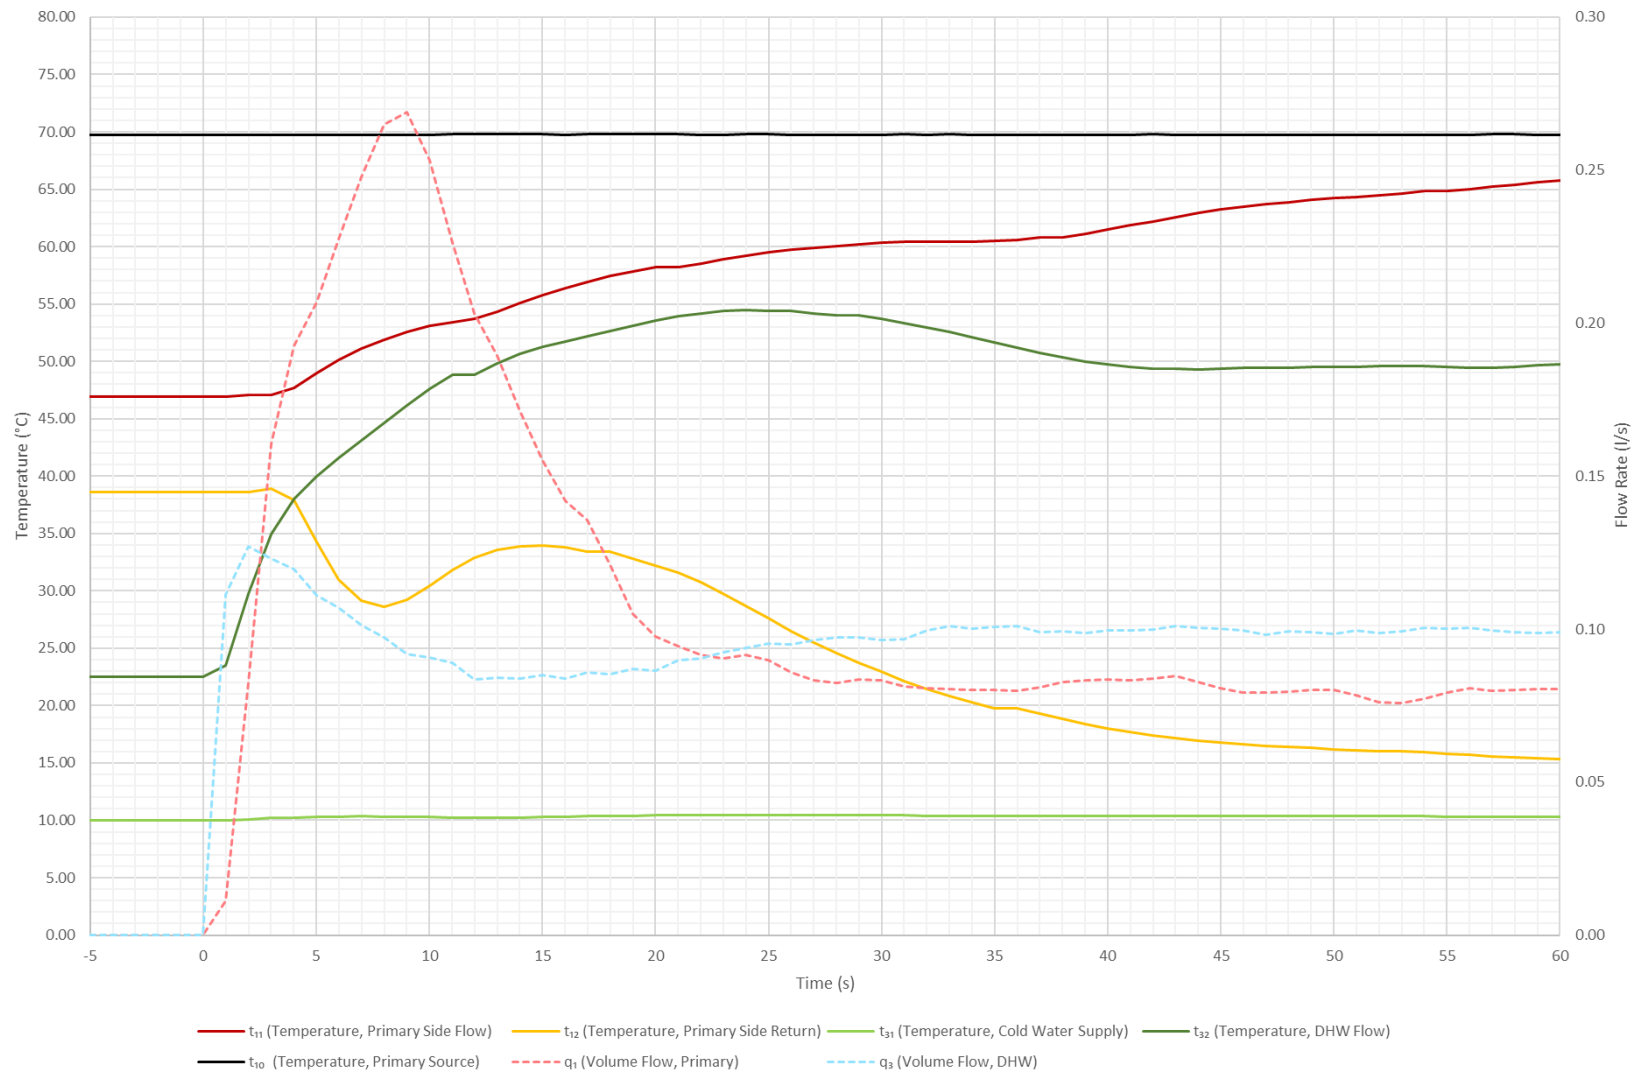


Figure 13 - Test 22a Key Metrics

9 TEST MODULE 8 – DHW, LOW TEMPERATURE, DH55-KWARM

9.1 Test Module 8 Information

9.1.1 Objective: To explore the performance of the HIU under changing loads, as would be the case in practical operation. Key performance criteria are speed and consistency of DHW delivery to the customer; DHW staying at a safe temperature at all times and the volume weighted average return temperature when supplying space heating or DHW.

9.1.2 The following set of tests are from test module 8 – Domestic Hot Water, Low Temperature, Keep Warm HOT WATER MODULE 8-DH55-KWarm.

Table 31 - Module 8 Tests

Module 8 Tests	
11b	DH/55C, DHW only, 50°C DHW, variable dP
12b	DH/55C, DHW Low Flow, 50°C DHW, 50kPa
12d	DH/55C, DHW Low Flow, 50°C DHW, 200kPa
13b	DH/55C, DHW Load Test, 50°C DHW
21b	DH/55C, DHW Keep Warm, 50°C DHW
22b	DH/55C, DHW Keep Warm Response Time, 50°C DHW

9.2 Test 11b Information

9.2.1 Objective: To investigate the performance of the HIU when delivering DHW, at a range of flow rates and differential pressures, given a 55°C primary flow temperature. The test investigates HIU operation in terms of DHW delivery and impacts on primary heat network return temperatures.

9.3 Test 11b Results

- 9.3.1 Performance criteria results can be seen in Table 33. Test result data can be seen in Table 32 and key metrics can be found in Figure 14. Best practice criteria can be found in table 34.

Table 32 - Module 8, Test 11b Results

Module 8 - Test 11b Results			
Parameter	Symbol	Result	
Maximum and minimum values of t_{32} when there is DHW flow	t_{32} (°C)	52.3	45.5
Number of consecutive seconds where $t_{32} > 55^{\circ}\text{C}$	(s)	0	
Overall DHW Volume Weighted Avg. Return Temp	VWART (°C)	20	

Table 33 - Module 8, Test 11b Performance Criteria

Module 8 - Test 11b Performance Criteria	
Performance Criteria, Fail if:	PASS/FAIL
Fail if DHW temperature (t_{32}) exceeds 60.0°C (to one decimal place) for more than 1 second, as this poses a scalding risk	Pass
Fail if primary return temperature (t_{12}) exceeds 55.0°C (to one decimal place) at any point, as this poses a scaling risk	Pass
Fail if the VWART is above 27°C (to one decimal place)	Pass
Fail if the average DHW temperature (t_{32}) is not $50.0^{\circ}\text{C} \pm 1^{\circ}\text{C}$ (to one decimal place) for the final 150 seconds of each of the 180 second DHW flow periods	Pass
Fail if the DHW temperature (t_{32}) is not being maintained at $50.0^{\circ}\text{C} \pm 3^{\circ}\text{C}$ (to one decimal place) for >150 seconds of each of the DHW flow periods	Pass
Fail if the DHW temperature (t_{32}) drops below 45.0°C (to one decimal place) for more than 5 consecutive seconds, as this would impact resident comfort	Pass

Table 34 - Module 8 - Test 11 Best Practice

Module 8 – Test 11 – Best Practice Criteria	
Best Practice Criteria if:	Best Practice
Best practice if the VWART is less than 20°C (to one decimal place)	Not Achieved
Best practice if the DHW temperature (t_{32}) is being maintained at $50.0^{\circ}\text{C} \pm 2^{\circ}\text{C}$ throughout periods of DHW flow	Not Achieved
Best practice if the DHW temperature (t_{32}) doesn't drop below 45.0°C (to one decimal place) for more than 2 consecutive seconds	Achieved

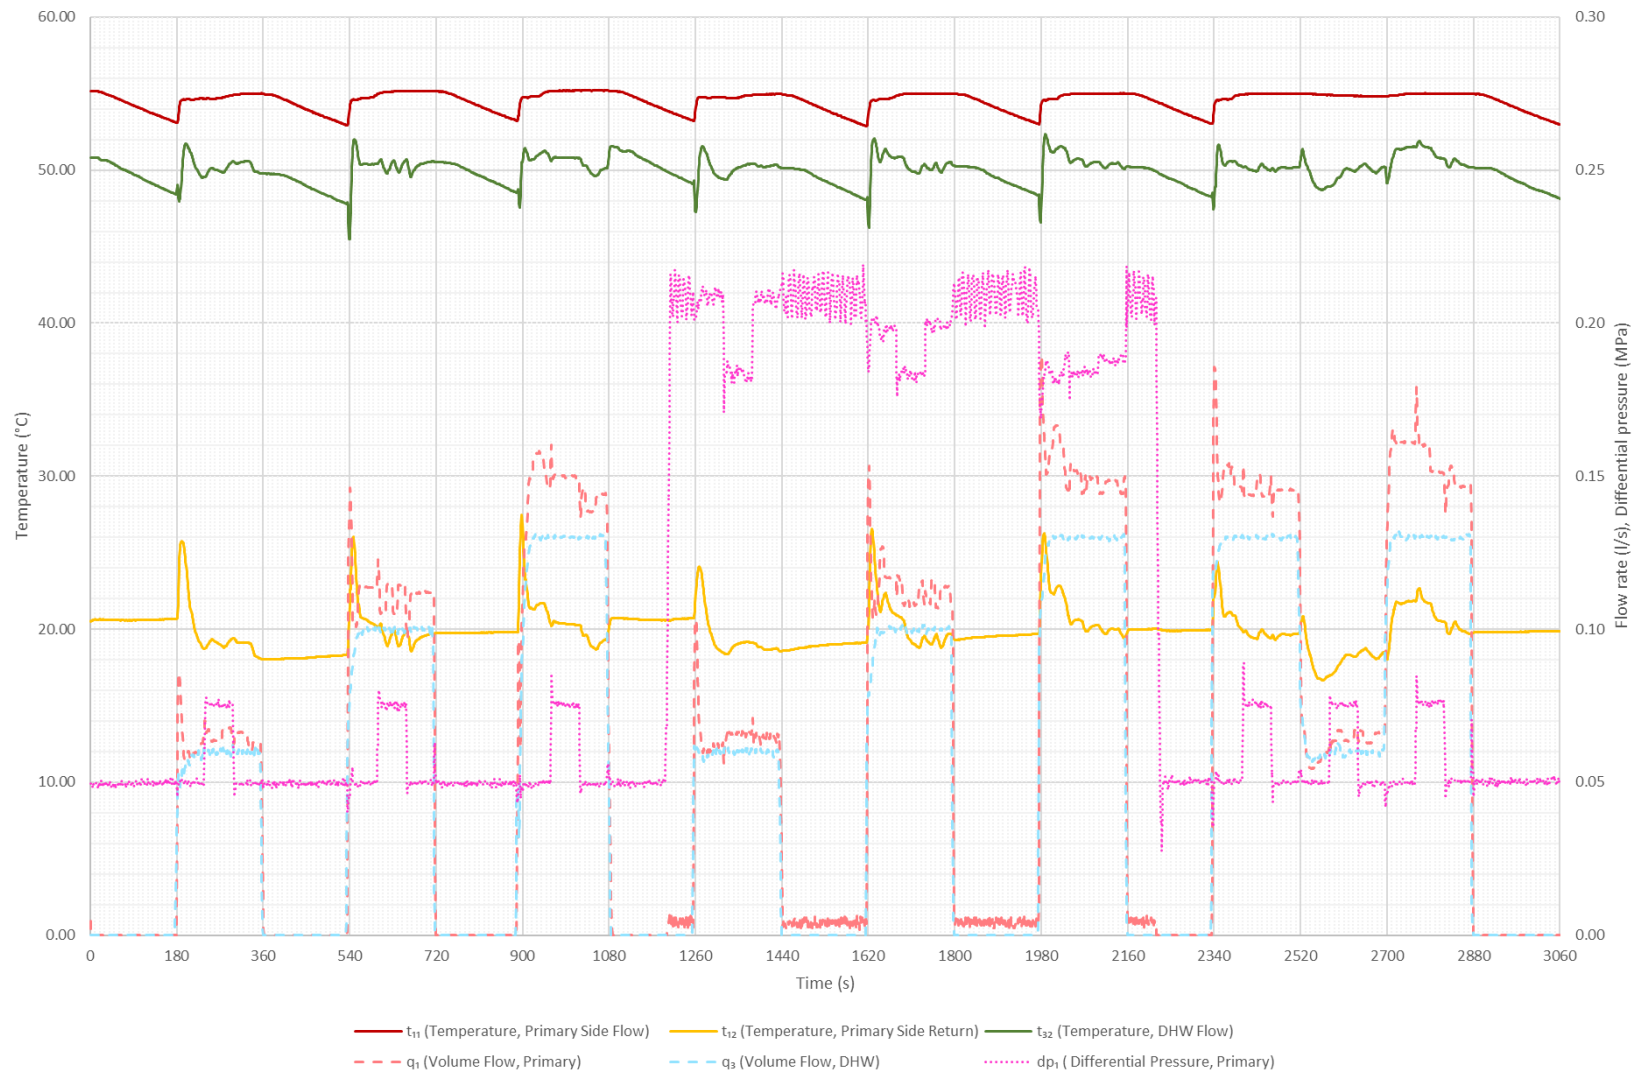


Figure 14 - Test 11b Key Metrics

9.4 Test 12b / 12d Information

- 9.4.1 Objective: To investigate the stability of DHW temperature at low flow rates. During operation, domestic hot water is sometimes drawn off at extremely low flow rates. Test 12 investigates the ability of the system to meet this condition by measuring the temperature at test point t_{32} at a flow rate of 0.02 l/s.

9.5 Test 12b / 12d Results

- 9.5.1 The HIU was able to deliver DHW at low flow rate above 45.0°C at the end of the 180 second period of low flow DHW.
- 9.5.2 The HIU was able to deliver stable DHW flow temperature (at t_{32}), defined as ability to maintain 50.0 ±3.0°C (1 decimal place) during the last 60 seconds of the test.
- 9.5.3 Performance criteria results can be seen in Table 36. Test result data can be seen in Table 35 and key metrics can be found in Figure 15 and Figure 16. Best practice criteria can be found in table 37.

Table 35 - Module 8, Test 12 Results

Module 8 - Test 12 Results					
Parameter	Symbol	12b Result		12d Result	
Maximum and minimum values of t_{32} when there is low DHW flow	t_{32} (°C)	51.8	48.7	51.8	48.8
Number of consecutive seconds where $t_{32} > 55^{\circ}\text{C}$	(s)	0		0	

Table 36 - Module 8, Test 12 Performance Criteria

Module 8 - Test 12 Performance Criteria	
Performance Criteria, Fail if:	PASS/FAIL
Fail if DHW temperature (t_{32}) exceeds 60.0°C (to one decimal place) for more than 1 second, as this poses a scalding risk	Pass
Fail if primary return temperature (t_{12}) exceeds 55.0°C (to one decimal place) at any point, as this poses a scaling risk	Pass
Fail if DHW temperature (t_{32}) is not maintained at 50°C ±3°C (to one decimal place) for more than 60 seconds	Pass

Table 37 - Module 8 - Test 12 Best Practice

Module 8 – Test 12 – Best Practice Criteria	
Best Practice Criteria if:	Best Practice
Best practice if DHW temperature (t32) is maintained at 50°C ±2°C (to one decimal place) throughout the test for both test 12b and 12d	Achieved

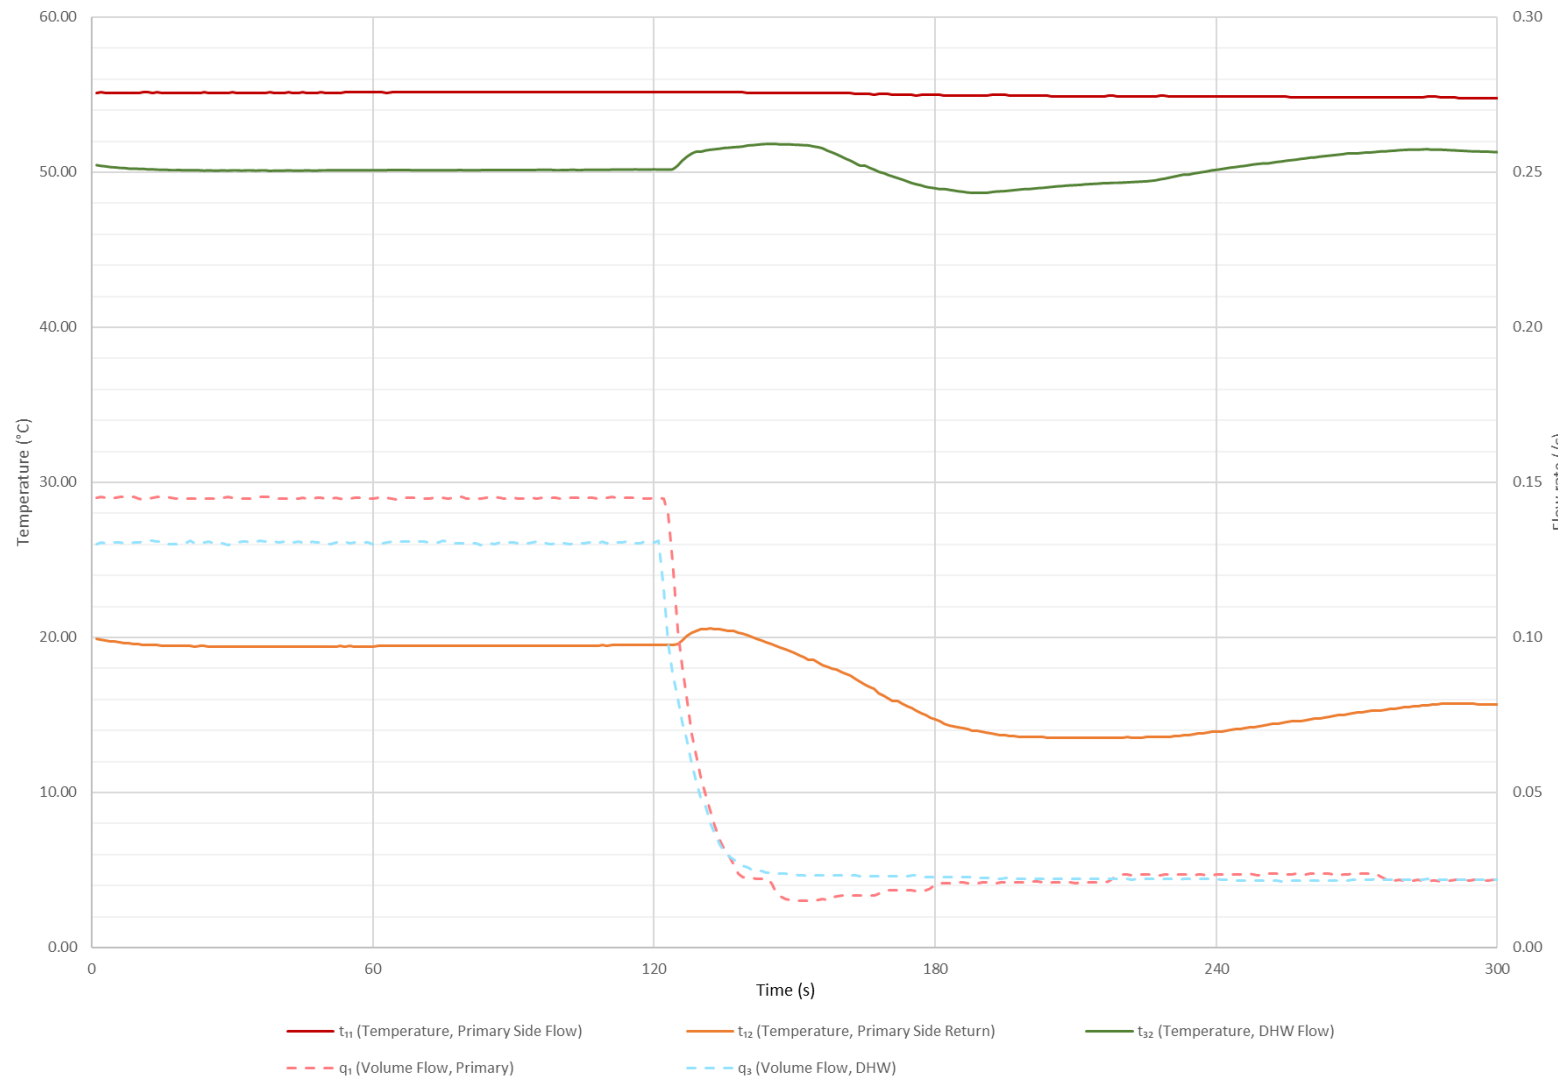


Figure 15 - Test 12b Key Metrics

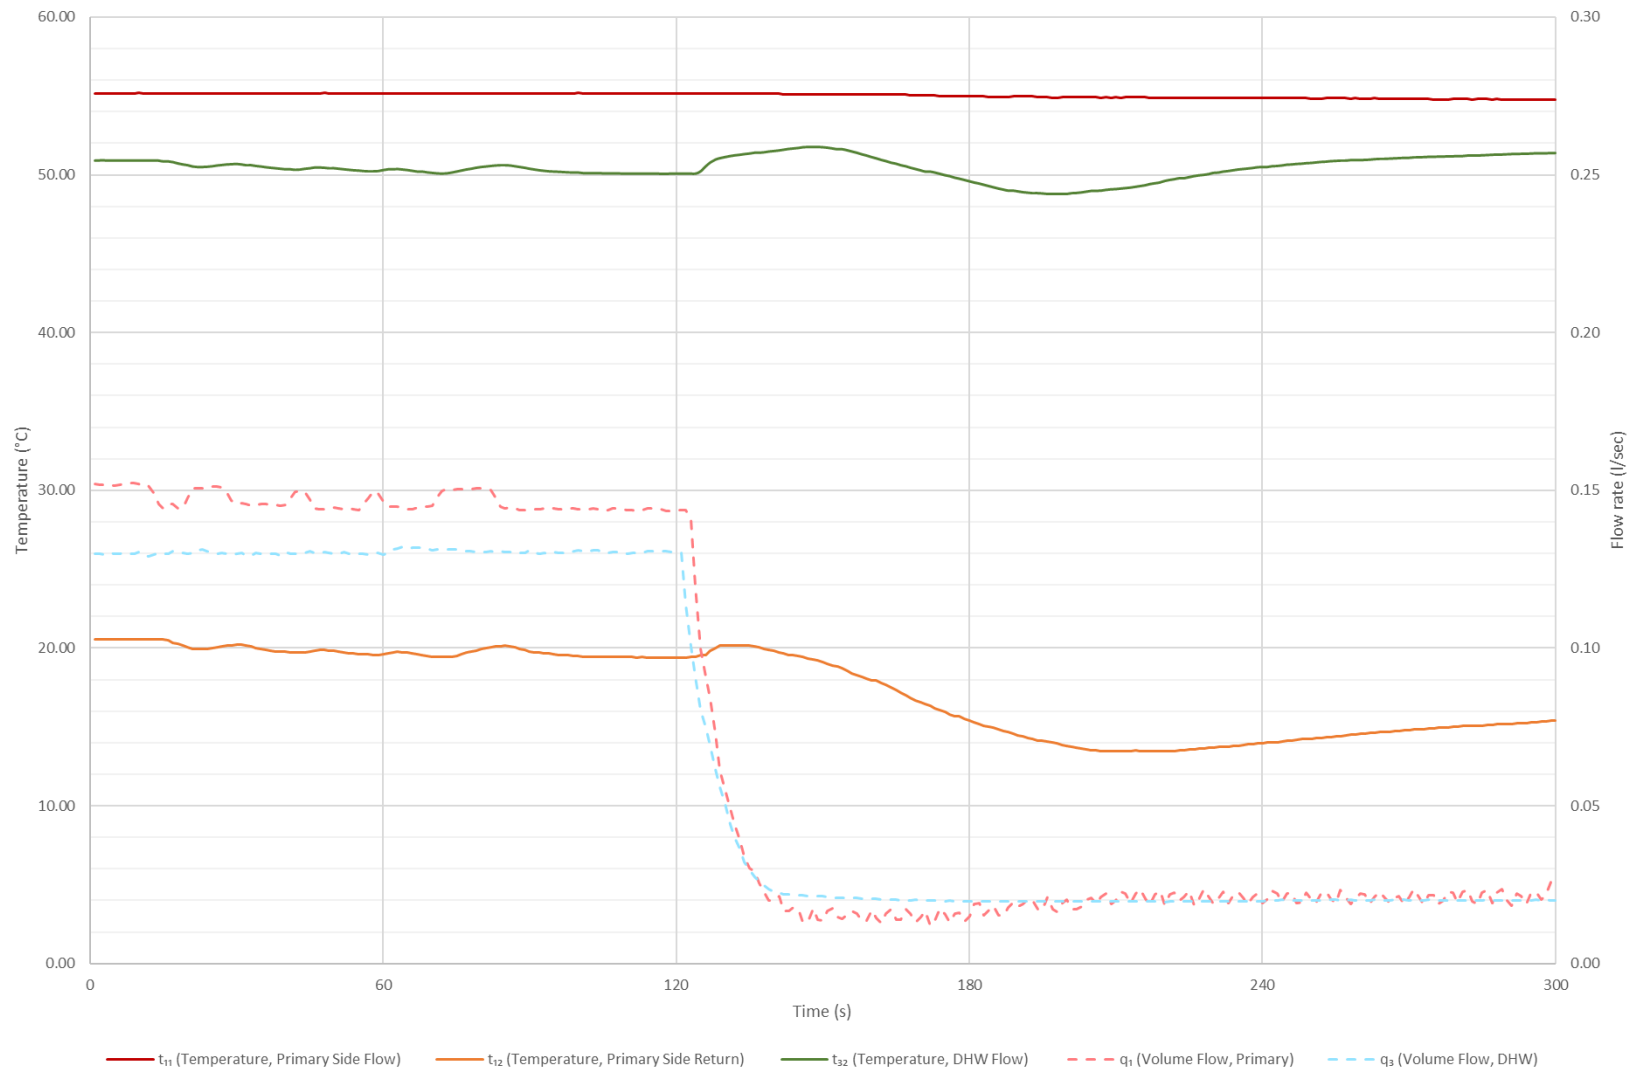


Figure 16 - Test 12d Key Metrics

9.6 Test 13b Information

- 9.6.1 Objective: To measure the maximum heat output (kW) and flow (l/sec) DHW output that can be delivered from the HIU. The HIU shall be set to deliver 50°C and the maximum DHW power output shall be measured with a flow step change and the peak value recorded when the DHW flow temperature is above 45°C.

9.7 Test 13b Results

- 9.7.1 The maximum DHW heat output was recorded as 43.6 kW, with a measured flow rate of 0.27 l/s, when producing minimum DHW at 45°C or above (Temperature achieved at final step 45.2 °C).
- 9.7.2 The recorded DHW line pressure drop across the HIU was 101 kPa.
- 9.7.3 The number of consecutive seconds where $t_{32} > 55^{\circ}\text{C}$ was 0 seconds.
- 9.7.4 Performance criteria results can be seen in Table 38. Test result data can be seen in Table 39, key metrics can be found in Figure 17.

Table 38 - Module 8, Test 13 Performance Criteria

Module 8 - Test 13 Performance Criteria	
Performance Criteria, Fail if:	PASS / FAIL
Fail if DHW (at t_{32}) is less than $50^{\circ}\text{C} \pm 1.0^{\circ}\text{C}$ (to one decimal place) at 0.13 l/s flow rate, as the HIU must be able to produce DHW to the target temperature at a moderate load	Pass
Fail if DHW temperature (t_{32}) exceeds 60.0°C (to one decimal place) for more than 1 second, as this poses a scalding risk	Pass
Fail if primary return temperature (t_{12}) exceeds 55.0°C (to one decimal place) at any point, as this poses a scaling risk	Pass

Table 39 - Module 8, Test 13b Results

Module 8 - Test 13b Results – Mean Average of Last 10 Seconds											
Parameter	Symbol	0.15 l/s (25kW)	0.18 l/s (30kW)	0.21 l/s (35kW)	0.24 l/s (40kW)	0.27 l/s (45kW)	0.30 l/s (50kW)	0.33 l/s (55kW)	0.36 l/s (60kW)	0.39 l/s (65kW)	0.42 l/s (70kW)
Temperature, primary side flow connection	t_{11} (°C)	55.1	55.2	55.2	55.2	55.2	55.2	55.2	N/A	N/A	N/A
Temperature, primary side return connection	t_{12} (°C)	20.3	19.9	20.4	20.8	18.9	17.2	15.9	N/A	N/A	N/A
Volume flow, primary side	q_1 (l/s)	0.172	0.202	0.240	0.274	0.274	0.274	0.274	N/A	N/A	N/A
Arithmetic mean of primary side power recorded during test	H_1 (kW)	25.1	29.8	35.0	39.5	41.8	43.6	45.1	N/A	N/A	N/A
Temperature, cold water supply	t_{31} (°C)	10.3	9.8	9.9	10.0	10.0	10.0	9.9	N/A	N/A	N/A
Temperature, domestic hot water flow from HIU	t_{32} (°C)	50.3	49.8	49.6	49.4	47.4	45.2	43.0	N/A	N/A	N/A
Volume flow, domestic hot water	q_3 (l/s)	0.150	0.180	0.210	0.240	0.269	0.300	0.330	N/A	N/A	N/A
Differential pressure, domestic hot water across HIU	dP_3 (kPa)	28	39	52	66	82	101	123	N/A	N/A	N/A
Arithmetic mean of DHW power recorded during test	H_3 (kW)	25.1	30.2	34.9	39.8	42.3	44.2	45.7	N/A	N/A	N/A

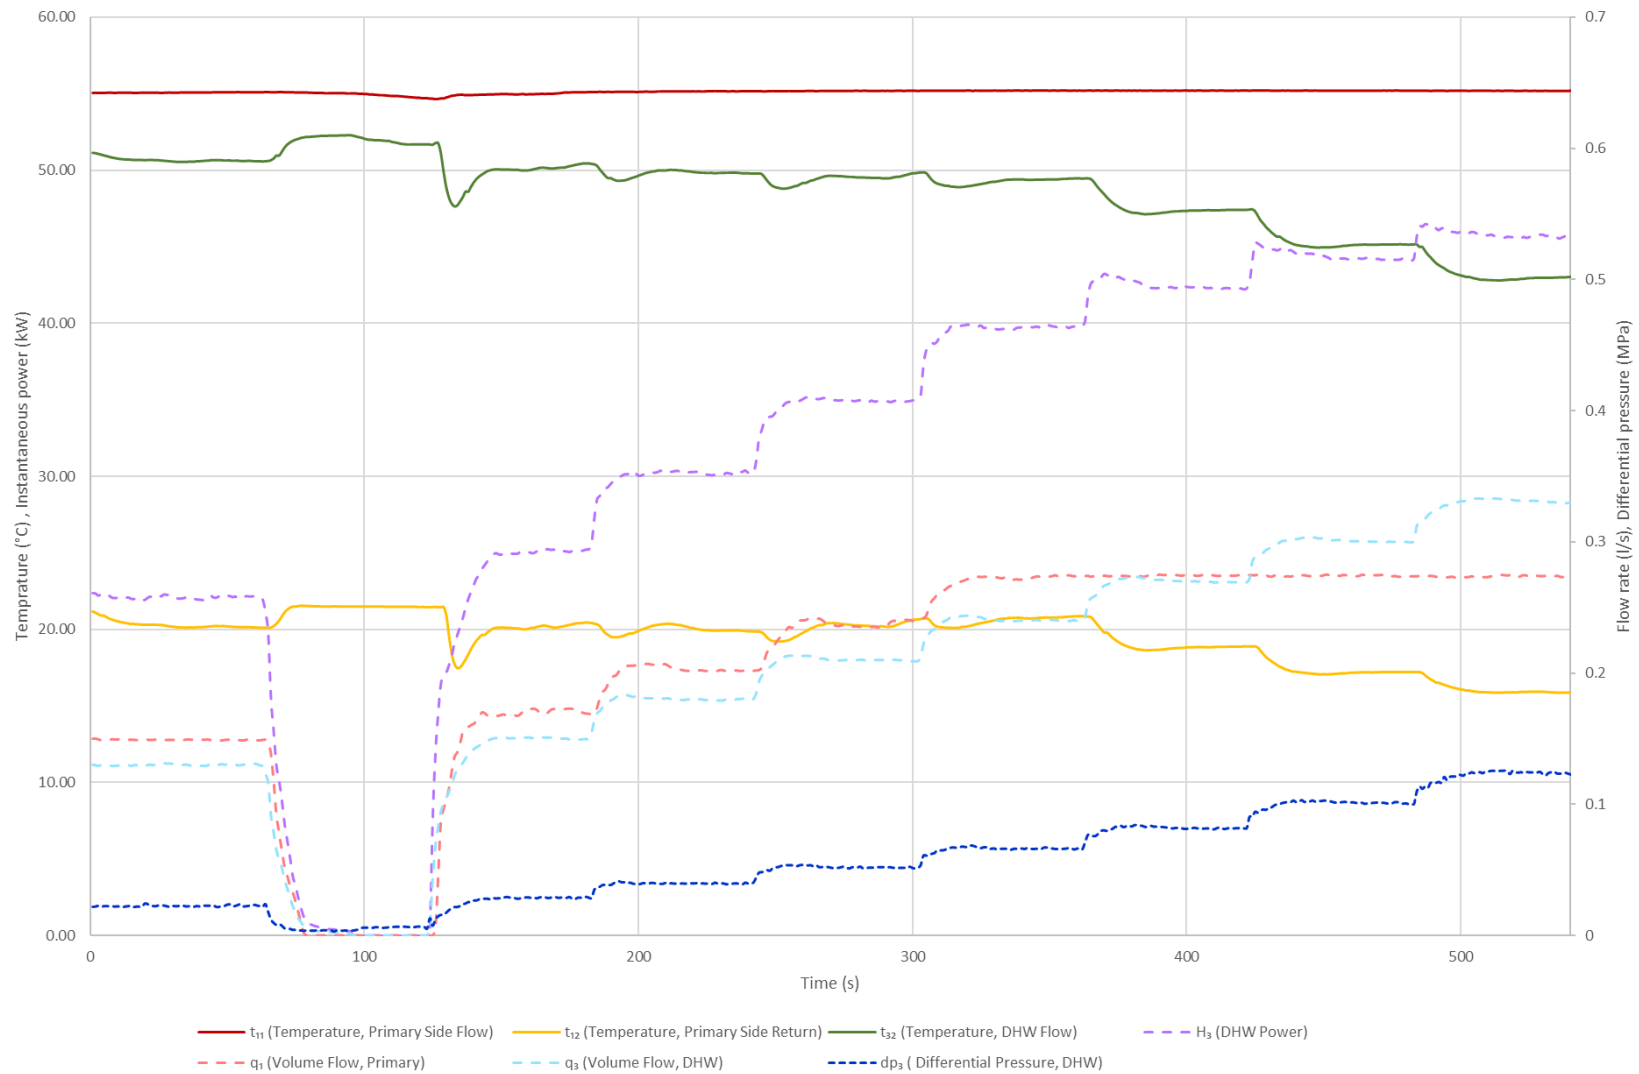


Figure 17 - Test 13b Key Metrics

9.8 Test 21b Information

- 9.8.1 Objective: To establish HIU performance during periods of no load, when operating in Keep Warm mode.

9.9 Test 21b Results

- 9.9.1 The Keep Warm operation is valid (based on Test 22b response time criteria).
- 9.9.2 The Keep Warm undergoes cycling (i.e. t_{11} varies by more than ± 3 °C during the final 3 hours of the test).
- 9.9.3 Performance criteria results can be seen in Table 41. Test result data can be seen in Table 40 and key metrics can be found in Figure 18. Best practice criteria can be found in table 42.

Table 40 - Module 8, Test 21b Results

Module 8 - Test 21b Results		
Parameter	Symbol	Result
Mean average volume flow, primary side	q_1 (l/s)	0.0020
Mean average of primary side power recorded during test	H_1 (kW)	0.04
Mean average electrical energy use	$W_{\text{electrical}}$ (W)	2.6
Mean average thermal energy use	W_{thermal} (W)	40.1
Overall energy loss per day	(kWh)	0.997
Overall Keep Warm Volume Weighted Avg. Return Temp	VWART (°C)	41

Table 41 - Module 8, Test 21 Performance Criteria

Module 8 - Test 21 Performance Criteria	
Performance Criteria, Fail if:	PASS/FAIL
Fail if VWART is above 48°C (to one decimal place)	Pass
Fail if primary return temperature (t_{12}) exceeds 55.0°C (to one decimal place) at any point, as this poses a scaling risk	Pass
Fail if the primary supply temperature to the HIU (t_{11}) drops to below 39°C	Pass
Fail if the HIU overall energy losses are greater than 1.0 kWh/day (to three decimal places)	Pass
Fail if the Test 22b DHW temperature response time test fails (i.e. the HIU Keep Warm operation is not a valid Keep Warm)	Pass

Table 42 - Module 8 - Test 21 Best Practice

Module 8 – Test 21 – Best Practice Criteria	
Best Practice Criteria if:	Best Practice
Best practice if VWART is below 44°C (to one decimal place)	Achieved
Best practice if HIU overall energy losses are less than 0.7 kWh/day (to three decimal places)	Not Achieved

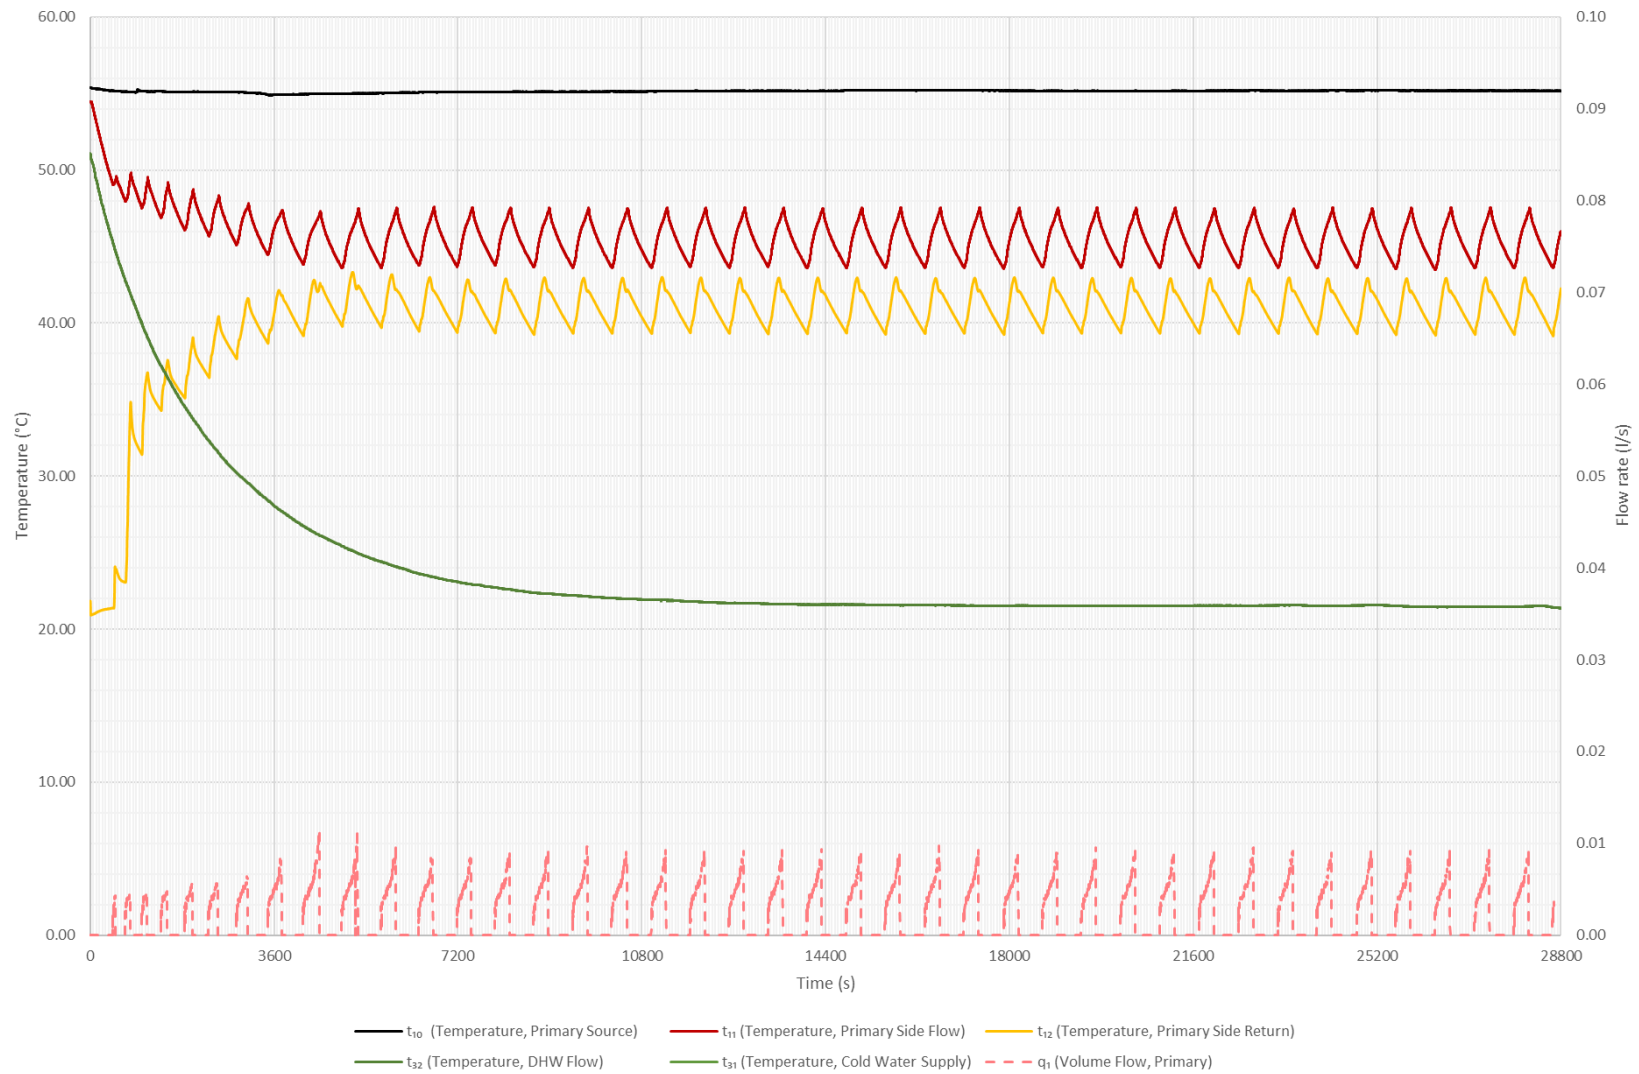


Figure 18 - Test 21b Key Metrics

9.10 Test 22b Information

- 9.10.1 Objective: To investigate DHW delivery time after a period of at least 8 hours Keep Warm only operation. This tests if the HIU can supply domestic hot water within an acceptable time of turning on the tap, which is a basic comfort requirement.

9.11 Test 22b Results

- 9.11.1 The Keep Warm operation is valid (based on response time criteria shown in Test 22 performance criteria).
- 9.11.2 Performance criteria results can be seen in Table 44. Test result data can be seen in Table 43 and key metrics can be found in Figure 19. Best practice criteria can be found in table 45.

Table 43 - Module 8, Test 22b Results

Module 8 - Test 22b Results		
Parameter	Symbol	Result
Time taken for t_{32} to reach 45.0°C and not subsequently drop below 42.0°C	(s)	11
Number of consecutive seconds where $t_{32} > 55^{\circ}\text{C}$	(s)	0
Mean average volume flow, primary side	q_1 (l/s)	0.168

Table 44 - Module 8, Test 22 Performance Criteria

Module 8 - Test 22 Performance Criteria	
Performance Criteria, Fail if:	PASS/FAIL
Fail if the DHW response time takes more than 15 seconds to reach 45.0°C (to one decimal place) at t_{32} while not dropping below 42.0°C (to one decimal place) thereafter	Pass
Fail if DHW temperature (t_{32}) exceeds 60.0°C (to one decimal place) for more than 1 second, as this poses a scalding risk	Pass
Fail if primary return temperature (t_{12}) exceeds 55.0°C (to one decimal place) at any point, as this poses a scaling risk	Pass

Table 45 - Module 8 - Test 22 Best Practice

Module 8 – Test 21 – Best Practice Criteria	
Best Practice Criteria if:	Best Practice
Best practice if DHW response time at t_{32} is less than 10 seconds	Not Achieved

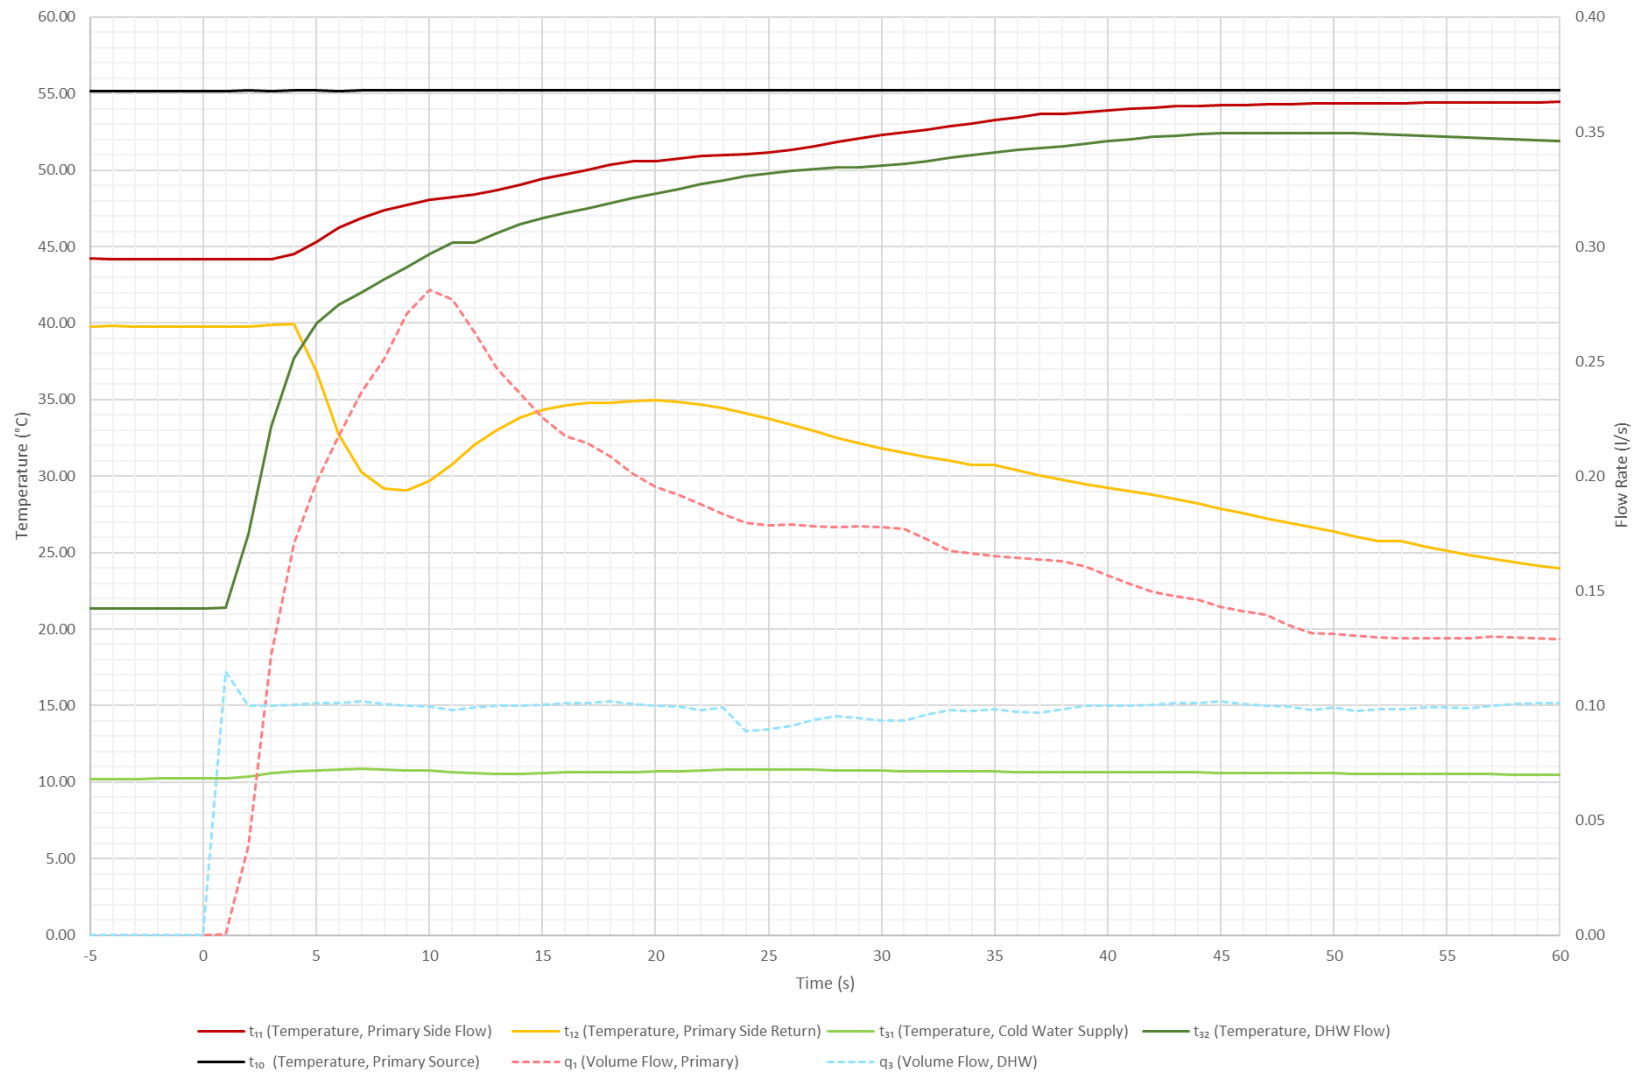


Figure 19 - Test 22b Key Metrics

10 CONCLUSIONS

All conclusions, opinions and interpretations indicated in this report are outside the scope of Enertek's UKAS accreditation.

- 10.1.1 The HIU has passed the requirements of the BESA UK HIU BESA Technical Standard for UK HIU Test Regime, V3-Rev001 September 2023.

11 EQUIPMENT AND INSTRUMENT LIST

EQUIPMENT NAME	ID NUMBER	CERTIFICATE NUMBER	MEASUREMENT UNCERTAINTY K=2	CALIBRATION DATE	CALIBRATION DUE
Cold Water Supply Probe	PRT 5002	CAL 000292	0.077 °C	27/04/2023	04/2024
DHW Outlet Probe	PRT 5003	CAL 000292	0.077 °C	27/04/2023	04/2024
Primary Inlet Probe	PRT 5004	CAL 000292	0.077 °C	27/04/2023	04/2024
Primary Return Probe	PRT 5005	CAL 000292	0.077 °C	27/04/2023	04/2024
SH Flow Probe	PRT 5006	CAL 000292	0.077 °C	27/04/2023	04/2024
SH Return Probe	PRT 5007	CAL 000292	0.077 °C	27/04/2023	04/2024
Primary Flow T ¹⁰	PRT 5008	CAL 000292	0.077 °C	27/04/2023	04/2024
Flow Meter	FM 601	3953070009	0.006 l/sec	07/11/2022	04/2024
Flow Meter	FM 602	3953070011	0.0025 l/sec	09/11/2022	04/2024
Flow Meter	FM 603	3953070012	0.0046 l/sec	13/11/2022	04/2024
Flow Meter	FM 605	3953070010	0.001 l/sec	14/11/2022	04/2024
Pressure Transducer	PT 083	3953070005	6.87 kPa	31/10/2022	04/2024
Pressure Transducer	PT 084	3953070003	8.33 kPa	18/10/2022	04/2024
Pressure Transducer	PT 085	3953070002	7.46 kPa	18/10/2022	04/2024
Pressure Transducer	PT 086	3953070004	7.23 kPa	18/10/2022	04/2024
Pressure Transducer	PT 087	3953070006	7.10 kPa	19/10/2022	04/2024
Pressure Transducer	PT 088	3953070007	6.54 kPa	19/10/2022	04/2024
Power Meter	PM 1022	3953070008	0.16 W	11/01/2023	01/2024
Pipe	PIPE 001	-	-	27/04/2024	04/2024

The reported expanded uncertainty is based on a standard uncertainty by a coverage factor $K = 2$, providing a level of confidence of approximately 95 %. The uncertainty evaluation has been carried out in accordance with BS EN ISO/IEC 17025:2017 requirements.

12 APPENDIX A

12.1 VWART Calculations for Modules 1 & 7

	VWART (°C)	Volume (m³)		VWART (°C)
DHW	14	23.8	Summer	26
Standby	39	23.2	Winter	31
Space Heating	37	43.9	Overall	29

	DHW Draw Test Results			Post DHW Draw (60 seconds)	
	Power (W)	Primary Flow (m³/hr)	VWART (°C)	Primary Volume (m³)	VWART (°C)
Low	9899	0.2	14	0.11	13
Medium	15697	0.2	14	0.02	14
High	205220	0.3	14	0.05	14

DHW Draw Volumes pa		
kWh pa	Hours	Volume pa (m³)
729	73.64	11.1
297	18.92	4.7
444	21.63	6.9

Post DHW Draw Volumes pa	
Events pa	Volume pa (m³)
10000	1.055
660	0.016
300	0.015

Standby Test Results	
Primary Flow (m³/hr)	VWART (°C)
0.0031	39

Standby Volumes pa	
Hours	Volume pa (m³)
7469	23.212

	Space Heating					
	Power (W)	Primary Flow (m³/hr)	VWART (°C)	kWh pa	Hours	Volume pa (m³)
0.5kW	463	0.017	37	98	211	3.65
1kW	944	0.030	36	787	834	24.66
4kW	4320	0.119	38	565	131	15.56

12.1.1 It should be noted that all VWART figures are to within $\pm 2^{\circ}\text{C}$ tolerance.

12.2 VWART Calculations for Modules 2 & 8

	VWART (°C)	Volume (m³)
DHW	20	44.3
Standby	41	52.8
Space Heating	36	69.8

	VWART (°C)
Summer	32
Winter	33
Overall	33

	DHW Draw Test Results			Post DHW Draw (60 seconds)	
	Power (W)	Primary Flow (m³/hr)	VWART (°C)	Primary Volume (m³)	VWART (°C)
Low	9692	0.2	20	0.88	19
Medium	16104	0.4	20	0.18	20
High	21231	0.5	21	0.09	20

DHW Draw Volumes pa		
kWh pa	Hours	Volume pa (m³)
729	75.22	17.2
297	18.44	7.3
444	20.91	10.9

Post DHW Draw Volumes pa	
Events pa	Volume pa (m³)
10000	8.762
660	0.121
300	0.028

Standby Test Results	
Primary Flow (m³/hr)	VWART (°C)
0.0071	41

Standby Volumes pa	
Hours	Volume pa (m³)
7450	52.751

	Space Heating					
	Power (W)	Primary Flow (m³/hr)	VWART (°C)	kWh pa	Hours	Volume pa (m³)
0.5kW	464	0.025	35	98	211	5.37
1kW	941	0.046	36	787	837	38.49
4kW	3864	0.177	37	565	146	25.92

12.2.1 It should be noted that all VWART figures are to within $\pm 2^{\circ}\text{C}$ tolerance.

13 APPENDIX B

13.1 Appliance Documentation

13.1.1 The details of the appliance documentation are given in Table 46 below.

Table 46 - Appliance Documentation

#	Component:	Document Submitted (Y/N):	Manufacturer and type:
1	Space Heating Heat Exchanger	Y	S W E P International Ab – E8AS 14
2	Domestic Hot Water Heat Exchanger	Y	Danfoss Ltd – XB05H-1-50
3	Controller for Space Heating and Hot Water Heating	Y	Bosch Thermotechnik GmbH – Control Unit HIU-CU UK [8737715288]
4	Control Valve and Actuator for Space Heating	Y	ESBE AB – [8-732-964-866]
5	Space Heating Strainer	Y	N/A
6	Control Valve and Actuator for Hot Water Heating	Y	ESBE AB – [8-718-692-126]
7	Temperature Sensors	Y	Testo Sensor GmbH – [8-705-905-296] NTC Rast 5, Exa Thermometrics India Pvt Ltd – [8-718-694-403] Sensor Clip, Exa Thermometrics India Pvt Ltd – [8-718-595-631] NTC 12K
8	Domestic Hot Water Isolating Valve	Y	N/A
9	Primary Side Strainer	Y	Italfim S.P.A – [8-718-692-897]
10	Drain Valves	Y	Altecnic Ltd – [8-718-693-210], Novasfer S.r.l UNIPERSONALE – [8-718-694-539], Worcester Bosch – [8-732-966-501], Novesfer S.r.l UNIPERSONALE – [8-718-694-540]
11	Vent Valve	Y	Torun Metal A.S – [8-718-694-129] Screw M6 x 16mm SKT HD cap black
12	Circulation Pump	Y	Grundfos – [8-732-943-869] Grundfos UPM 3-
13	Heat Meter	Y	Diehl Metering S.A.S – [8-732-948-838] Sharkey 775
14	Domestic Hot Water Flow Sensor	Y	Marquardt GmbH – [8-732-960-972] Double Pulse sensor flow turbine, Neoperl – [8-732-965-320] 24l/min regulator (Type N)

15 16	Pipes & Connections	Y	A.G.S srl – [8-732-959-731] Pipe CH flow w. wet sensor, Tubeworkx.B.V – [8-718-692-096] Pipe CH Return, Tubeworkx.B.V – [8-718-692-510] Pipe to DPCV to HM, A.G.S srl [8-732-948-845] Pipe District Flow w. wet sensor, Tubeworkx.B.V – [8-718-695-025] Pipe U trap, Tubeworkx.B.V – [8-732-968-414] Pipe DHW
		Y	
17	Joints	Y	Novasfer S.r.l UNIPERSONALE – Manifold PHE HDU
18	Gaskets	Y	DMS flow Measurement & Control Ltd – [8-718-694-527] O Ring 9.0x4.0x2.5 EPDM, Parker Hannifin GmbH – [8-710-103-161] Seal Bonded Seal, Superior Seals – [8-716-771-154] O Ring 17x4x2, ERIKS Industrial Services Ltd – [8-718-698-697] Washer PTFE
19	O Rings	Y	
20	Pressure Sensor	Y	Wika Instruments Ltd – [8-718-686-513]
21	Expansion Vessel	Y	Onaysan Endustriyel – [8-718-699-932] Expansion Vessel 5L_438x250x84
22	Insulation	Y	Synprodo Reinsert Kunststofftechik GmbH & CokG – Insulation EPP indirect, Insert EPP
A1	Commissioning Guide	Y	
A2	Operation Guide	Y	
A3	Declaration of Conformity	Y	
A4	Full Parameter List	Y	DPCV set point = 300 mbar Return temperature limiter = Active Return temperature limiter set point = 50 Keep warm function = Active Keep warm set point = 41 Pump setting = PP3
A5	Maximum Primary Static Operating Differential Pressure	Y	<i>see operating manual</i>
	Software Version	Y	NL51.20
	Model Name and Type Number	Y	Flow 8500 60 [7-735-600-744] / Flow 8500 60 H [7-735-600-744]
	Serial Number	Y	5570-379-000001-7735600744
	Any Other Components Stated By Manufacturer	Y	DPCV – [8-732-924-591] Valve DPCV DN15 20-60kPa

13.2 Appliance Photographs



Figure 20 - HIU with Outer Case Fitted

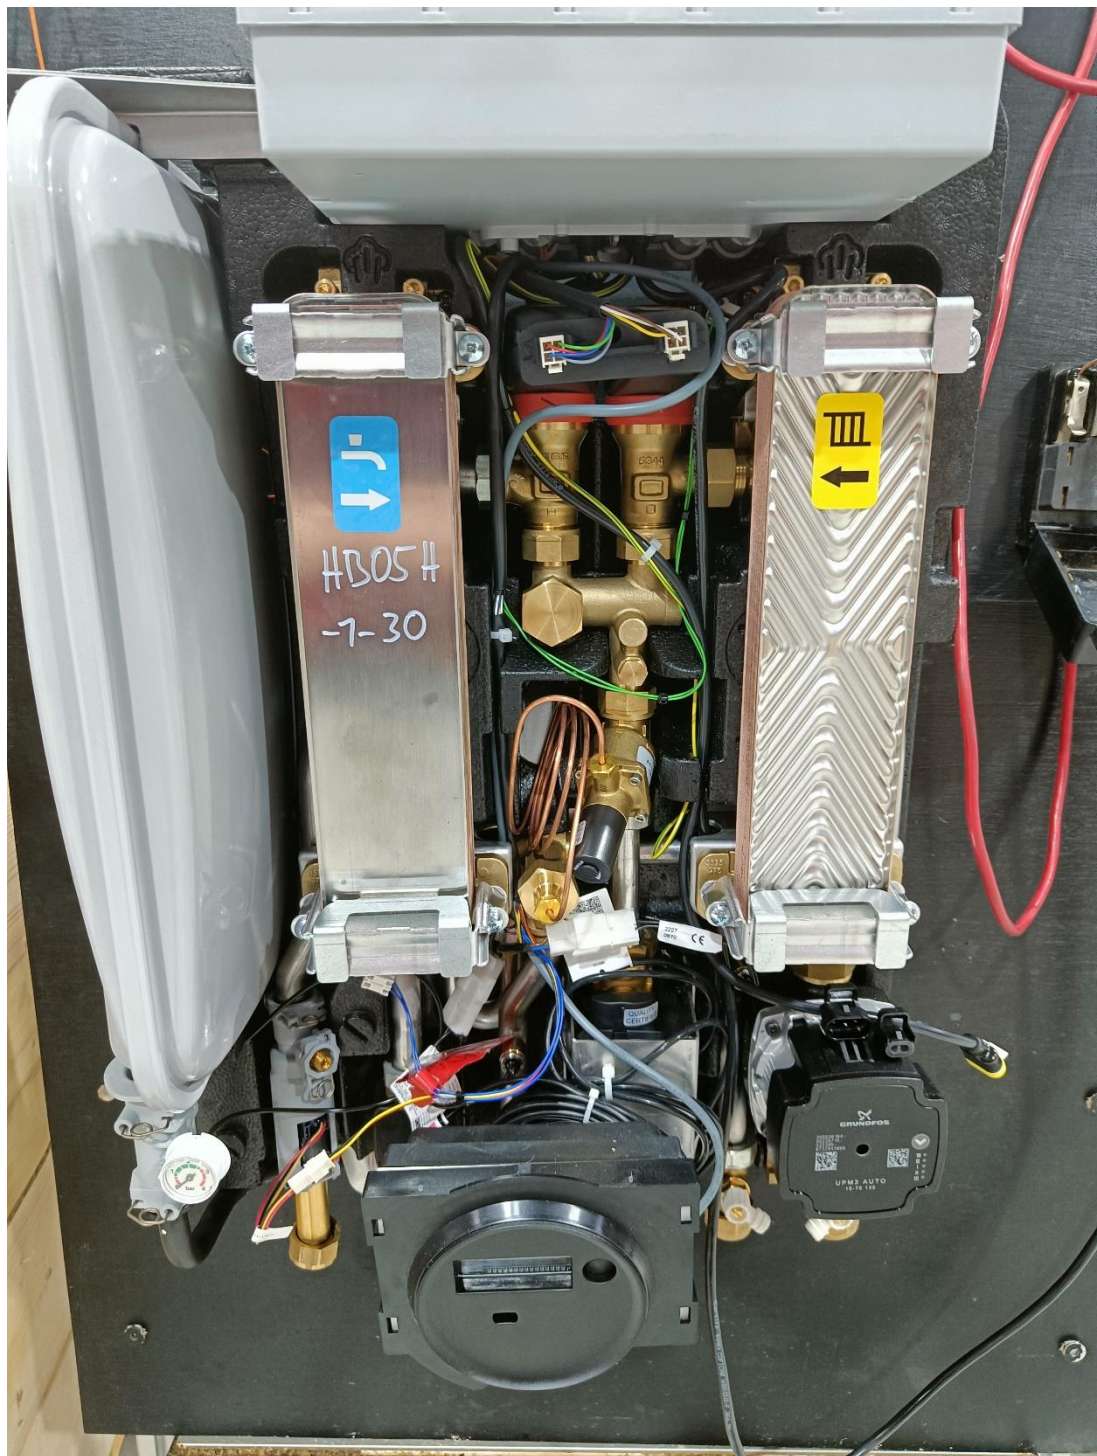


Figure 21 - HIU with Outer Case Removed

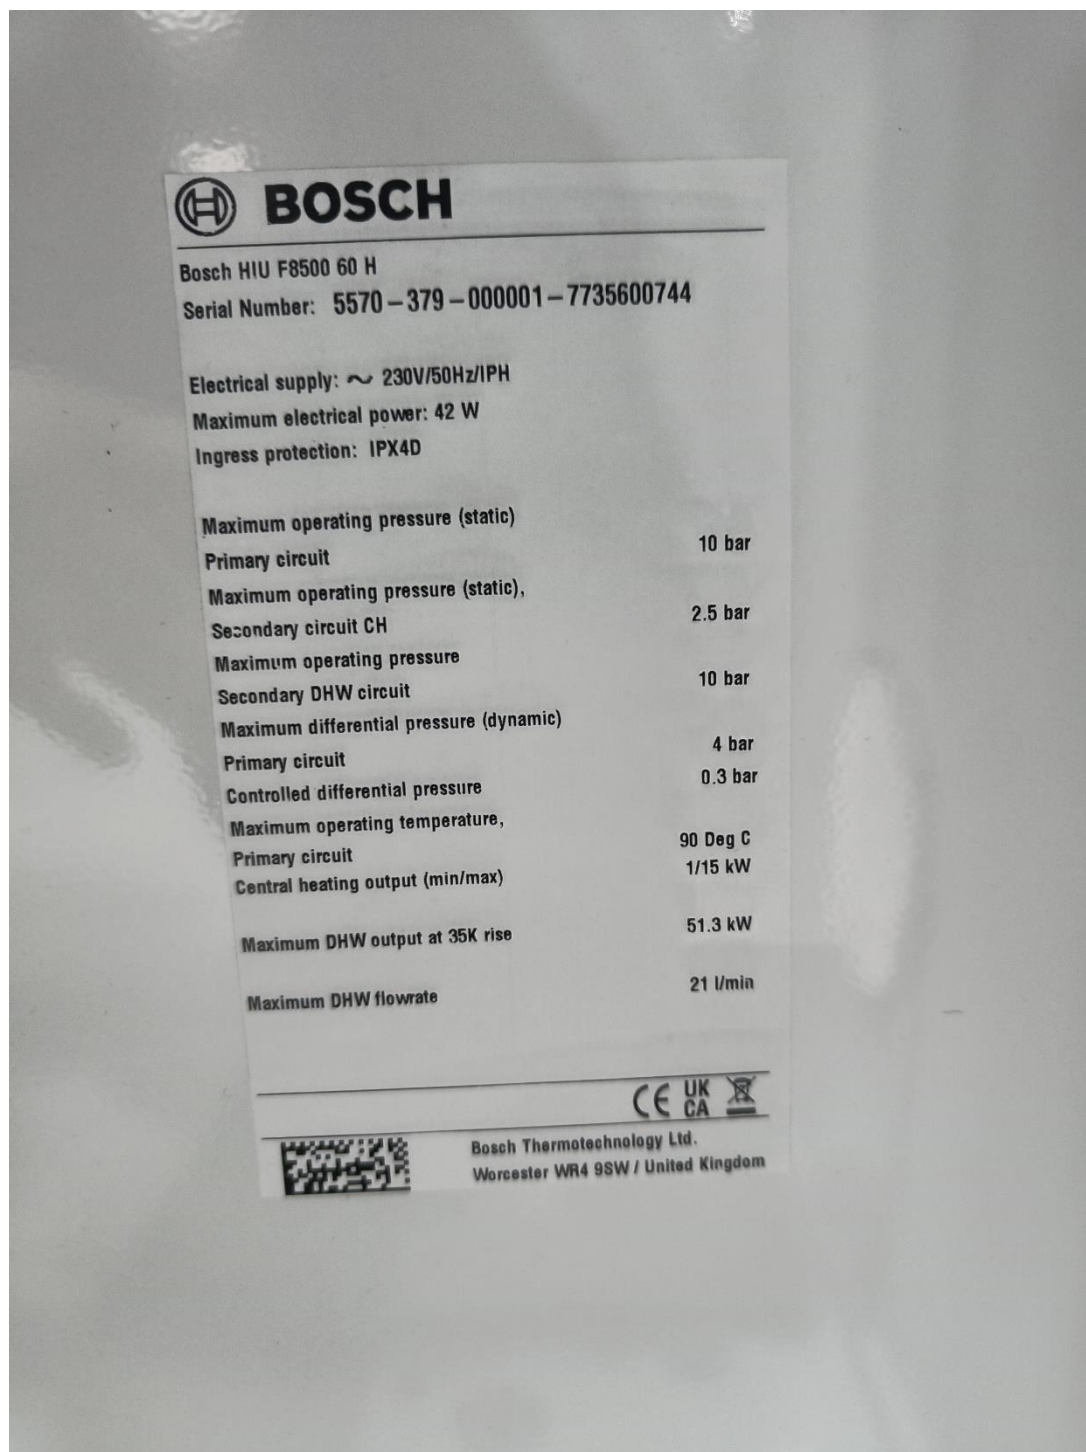


Figure 22 - Nameplate with Model Details and Serial Number

14 APPENDIX C

14.1 UK Declaration of Conformity

1

Statement of Compliance

Product Type
Bosch Flow 8500 Heat Interface Unit range

We declare that, in our opinion, the stated products will pass all applicable tests of the Low Voltage Directive (LVD), Electromagnetic compatibility (EMC) and Restriction of Hazardous Substances (RoHS) Directives as listed below.

The applicable requirements in EN 60335, EN55014, EN 61000 and EN IEC 63000



BOSCH

Bosch Thermotechnik GmbH, Junkersstraße 20, 73249 Wernau, Germany, as the manufacturer



Digitally signed by
 pkc, 8075CH, DE, O, A,
 David.Pasalodos
 DN: cn=David.Pasalodos,
 ou=01-05 +02'00'

David Pasalodos Pastor

Head of Quality Management
 HC/QMM-CS



Digitally signed by
 pkc, bosch, de, C, P,
 Christian.Hovermann
 Date: 2024.06.03
 10:56:54 +02'00'

Christian Hovermann

Head of Engineering
 HC-CS/XHA

We declare that this statement of compliance is prepared by Bosch Thermotechnik GmbH, Junkersstraße 20, 73249 Wernau, Germany.

Place of issue: Wernau

Date of issue: 27/05/2024

Bosch Thermotechnik GmbH

Figure 23 - UK Declaration of Conformity

14.2 Water Regulation 4 Certificate

Awaiting REG4 confirmation, evidence supplied.

Figure 24 - Water Regulation 4 Certificate

15 BIBLIOGRAPHY

- [1] *BESA (Building Engineering Services Association) UK HIU (Heat Interface Unit) Test regime Technical Specification, V3-Rev001 September 2023*
- [2] *Technical Standard for UK HIU Test Regime - Space Heating, High Temperature, Indirect HEATING MODULE 1-DH70 Indirect, Version 1: 2023*
- [3] *Technical Standard for UK HIU Test Regime - Space Heating, Low Temperature, Indirect HEATING MODULE 2-DH55 Indirect, Version 1: 2023*
- [4] *Technical Standard for UK HIU Test Regime - Domestic Hot Water, High Temperature, Keep Warm HOT WATER MODULE 7-DH70-KWarm, Version 1: 2023*
- [5] *Technical Standard for UK HIU Test Regime - Domestic Hot Water, Low Temperature, Keep Warm HOT WATER MODULE 8-DH55-KWarm, Version 1: 2023*

Report Issue No	Reason for Report Update
1	Original issue
2	Values for flow rates updated as well as the images in the appendix

THIS PAGE IS INTENTIONALLY LEFT BLANK



1 Malmo Road
Sutton Fields
Kingston upon Hull, HU7 0YF

+44 (0) 1482 877500
enertekinternational.com
Registered in England No. 2262638

EUA
energy & utilities alliance

HHiC
HEATING & HOTWATER
INDUSTRY COUNCIL