

BESA HIU Test Report

Pioneer

Modules Tested: 1,2,7 & 8

Client: Cetetherm

Project Number: E4957 Report Issue: 1

03 May 2024



Prepared By:

Simon Broxham – Laboratory Manager



Approved By:

Josh Welburn – Engineering Project Manager



THIS PAGE IS INTENTIONALLY LEFT BLANK

DISCLAIMER

This report is confidential to the client named on the front cover.

This report may be stored, transmitted, or reproduced in full by the named client, however if the report is to be placed in the public domain or used for publicity / promotional purposes please inform a director of Enertek International Ltd.

The report must not be reproduced in part, edited, abridged or any extracts used for any purpose whatsoever without written permission from a director of Enertek International Ltd.

The client remains responsible for any data supplied by the client for use in this report. If this data could affect the test results this will be noted in the report.

Any test results contained in this report apply only to the specific sample(s) tested as described in the report.

This report does not imply or indicate any element of commercial approval, recommendation, or promotion by Enertek International Ltd.

Enertek' s default decision rule is in accordance with ILAC-G8:09/2019 simple acceptance.

CONTENTS

1	EXECUTIVE SUMMARY	8
2	BRIEF.....	9
3	DEFINITIONS.....	10
4	INTRODUCTION	13
4.1	Installation of Appliance	13
4.2	Appliance Details	13
4.3	Appliance Design Pressures and Temperatures	13
5	TEST METHOD	14
5.1	Test Regime.....	14
6	TEST MODULE 1 - Space Heating, High Temperature, DH70 Indirect	16
6.1	Test Module 1 Information.....	16
6.2	Test Module 1 Results.....	16
7	TEST MODULE 2 - Space Heating, Low Temperature, DH55 Indirect	21
7.1	Test Module 2 Information.....	21
7.2	Test Module 2 Results.....	21
8	TEST MODULE 7 – DHW, High Temperature, DH70-KWarm	26
8.1	Test Module 7 Information	26
8.2	Test 11a Information	26
8.3	Test 11a Results	27
8.4	Test 12a / 12c Information	29
8.5	Test 12a / 12c Results	29
8.6	Test 13a Information	32
8.7	Test 13a Results	32
8.8	Test 21a Information	35
8.9	Test 21a Results	35
8.10	Test 22a Information	38
8.11	Test 22a Results.....	38
9	TEST MODULE 8 – DHW, Low Temperature, DH55-KWarm	40
9.1	Test Module 8 Information	40
9.2	Test 11b Information	40
9.3	Test 11b Results	41
9.4	Test 12b / 12d Information.....	43
9.5	Test 12b / 12d Results.....	43
9.6	Test 13b Information	46
9.7	Test 13b Results	46
9.8	Test 21b Information	49
9.9	Test 21b Results	49
9.10	Test 22b Information	52
9.11	Test 22b Results.....	52
10	CONCLUSIONS	54
11	EQUIPMENT AND INSTRUMENT LIST	55
12	APPENDIX A.....	56
12.1	VWART Calculations for Modules 1 & 7	56
12.2	VWART Calculations for Modules 2 & 8	57

13	APPENDIX B.....	58
13.1	Appliance Documentation.....	58
13.2	Appliance Photographs	60
14	APPENDIX C	63
14.1	Declaration of Conformity	63
14.2	Water Regulation 4 Certificate	64
15	BIBLIOGRAPHY	65

List of Figures

Figure 1 - EIL's HIU Test Rig schematic which is taken from Appendix B, Figure 4, of Technical Standard for UK HIU Test Regime Version 3: 2023.....	15
Figure 2 - Test 01a Key Metrics.....	18
Figure 3 - Test 01b Key Metrics.....	19
Figure 4 - Test 01c Key Metrics.....	20
Figure 5 - Test 01d Key Metrics.....	23
Figure 6 - Test 01e Key Metrics.....	24
Figure 7 - Test 01f Key Metrics	25
Figure 8 - Test 11a Key Metrics.....	28
Figure 9 - Test 12a Key Metrics.....	30
Figure 10 - Test 12c Key Metrics.....	31
Figure 11 - Test 13a Key Metrics.....	34
Figure 12 - Test 21a Key Metrics.....	37
Figure 13 - Test 22a Key Metrics.....	39
Figure 14 - Test 11b Key Metrics.....	42
Figure 15 - Test 12b Key Metrics.....	44
Figure 16 - Test 12d Key Metrics.....	45
Figure 17 - Test 13b Key Metrics.....	48
Figure 18 - Test 21b Key Metrics.....	51
Figure 19 - Test 22b Key Metrics.....	53
Figure 20 - HIU with outer case fitted.....	60
Figure 21 - HIU with outer case removed.....	61
Figure 22 - Declaration of conformity.....	63
Figure 23 - Water regulation 4 certificate.....	64

List of Tables

Table 1 - Appliance Details and Modules Tested.....	8
Table 2 - Modules Tested Pass or Fail Summary.....	8
Table 3 - Modules 1 & 7 VWART Information.....	8
Table 4 - Modules 2 & 8 VWART Information.....	8
Table 5 - Definitions and Abbreviations.....	10
Table 6 - Appliance Details.....	13
Table 7 - Appliance Design Pressures and Temperatures.....	13
Table 8 - Module 1 Tests	16
Table 9 - Module 1 Performance Criteria	16
Table 10 - Module 1 Best Practice	16
Table 11 - Module 1 Test Results.....	17
Table 12 - Module 2 Tests.....	21
Table 13 - Module 2 Performance Criteria	21
Table 14 - Module 2 Best Practice	21
Table 15 - Module 2 Test Results.....	22
Table 16 - Module 7 Tests.....	26
Table 17 - Module 7, Test 11a Results	27
Table 18 - Module 7, Test 11a Performance Criteria.....	27
Table 19 - Module 7 - Test 11 Best Practice	27
Table 20 - Module 7, Test 12 Results	29
Table 21 - Module 7, Test 12 Performance Criteria.....	29
Table 22 - Module 7 - Best Practice	29
Table 23 - Module 7, Test 13 Performance Criteria.....	32
Table 24 - Module 7, Test 13a Results	33
Table 25 - Module 7, Test 21a, HIU Internal Parameter Setup & Operation.....	35
Table 26 - Module 7, Test 21a Results	35
Table 27 - Module 7, Test 21 Performance Criteria.....	36
Table 28 - Module 7 - Best Practice	36
Table 29 - Module 7, Test 22a Results	38
Table 30 - Module 7, Test 22 Performance Criteria.....	38
Table 31 - Module 7 - Best Practice	38
Table 32 - Module 8 Tests.....	40
Table 33 - Module 8, Test 11b Results	41
Table 34 - Module 8, Test 11b Performance Criteria.....	41
Table 35 - Module 8 - Test 11 Best Practice	41
Table 36 - Module 8, Test 12 Results	43
Table 37 - Module 8, Test 12 Performance Criteria.....	43
Table 38 - Module 8 - Test 12 Best Practice	43
Table 39 - Module 8, Test 13 Performance Criteria.....	46
Table 40 - Module 8, Test 13b Results	47
Table 41 - Module 8, Test 21b, HIU Internal Parameter Setup & Operation.....	49
Table 42 - Module 8, Test 21b Results.....	49
Table 43 - Module 8, Test 21 Performance Criteria.....	50
Table 44 - Module 8 - Test 21 Best Practice	50
Table 45 - Module 8, Test 22b Results.....	52
Table 46 - Module 8, Test 22 Performance Criteria.....	52
Table 47 - Module 8 - Test 22 Best Practice	52
Table 48 - Appliance Documentation	58

1 EXECUTIVE SUMMARY

- 1.1.1 The Cetetherm Pioneer HIU underwent testing to the BESA Technical Standard for UK HIU Test Regime, V3-Rev001 September 2023. Modules 1,2,7 and 8 were tested. Summary tables can be seen below, with further technical data shown in each respective test module chapter of this report. VWART calculations can be found within APPENDIX A.

Table 1 - Appliance Details and Modules Tested

Manufacturer:	Cetetherm
Model:	Pioneer
Modules:	1,2,7,8

Table 2 - Modules Tested Pass or Fail Summary

Module 1:	Pass
Module 2:	Pass
Module 7:	Pass
Module 8:	Pass

Table 3 - Modules 1 & 7 VWART Information

	VWART (°C)	Volume (m³)
DHW	15	29.4
Standby	33	20.6
Space Heating	36	40.8

	VWART (°C)
Summer	22
Winter	28
Overall	25

Table 4 - Modules 2 & 8 VWART Information

	VWART (°C)	Volume (m³)
DHW	22	56.2
Standby	37	37.2
Space Heating	36	76.0

	VWART (°C)
Summer	29
Winter	32
Overall	31

- 1.1.2 It should be noted that all VWART figures are to within $\pm 2^{\circ}\text{C}$ tolerance.

2 BRIEF

- 2.1.1 Enertek international Limited (EIL), were contracted to receive, install, and commission a production sample of the Cetetherm Pioneer.
- 2.1.2 To perform the tasks required for assessing the efficiency of Domestic Hot Water (DHW) and Space Heating (SH) as per the BESA UK HIU BESA Technical Standard for UK HIU Test Regime, V3-Rev001 September 2023, a publicly available online test regime. This is here-on referred to as the Test Regime throughout this document.
- 2.1.3 To provide a report detailing the tests carried out and generated results in accordance with the Test Regime criteria, including calculations for Volume Weighted Average Return Temperatures (VWART).

3 DEFINITIONS

- 3.1.1 The following definitions and abbreviations which have been used within this report can be found in Table 5 below.

Table 5 - Definitions and Abbreviations

Symbol	Description
t_{10}	Temperature, primary source
t_{11}	Temperature, primary side flow connection
t_{12}	Temperature, primary side return connection
t_{21}	Temperature, space heating system return connection
t_{22}	Temperature, space heating system flow connection
t_{31}	Temperature, cold water supply
t_{32}	Temperature, domestic hot water flow from HIU
t_{b1}	Temperature, primary side bypass flow (for non-keep warm configuration)
t_{b2}	Temperature, primary side bypass return (for non-keep warm configuration)
q_1	Volume flow, primary side
q_2	Volume flow, space heating system
q_3	Volume flow, domestic hot water
P_{11}	Static pressure, primary side flow connection
P_{12}	Static pressure, primary side return connection
P_{21}	Static pressure, space heating system return connection
P_{22}	Static pressure, space heating system flow connection
P_{31}	Static pressure, cold water supply
P_{32}	Static pressure, domestic hot water flow from HIU
dP_1	Differential pressure, primary system across HIU
dP_2	Differential pressure, space heating system across HIU
dP_3	Differential pressure, domestic hot water across HIU
Q_{DHW}	Estimated annual energy demand per year for hot water
Q_{SH}	Estimated annual energy demand per year for space heating
n_{DHW}	Number of DHW events per year

H_1	Arithmetic mean of primary side power recorded during test
H_3	Arithmetic mean of DHW power recorded during test
H_2	Arithmetic mean of space heating power recorded during test
h_{DHW}	Annual hours that HIU is producing DHW
h_{SH}	Annual hours that HIU is producing space heating
h_{KWM}	Annual hours that HIU is in keep warm mode
h_{NKWM}	Annual hours that HIU is in non-keep warm mode
V_{DHW}	Volume of primary water recorded during and post-DHW test
V_{SH}	Volume of primary water recorded during space heating tests
V_{KWM}	Volume of primary water recorded during keep warm test
V_{NKWM}	Volume of primary water recorded during non-keep warm test
$Prop_{Summer}$	Proportion of year HIU is operating in "summer" mode
$Prop_{Winter}$	Proportion of year HIU is operating in "winter" mode
$VWART_{DHW}$	DHW Volume Weighted Average Return Temperature
$VWART_{SH}$	Space Heating Volume Weighted Average Return Temperature
$VWART_{KWM}$	Keep Warm Volume Weighted Average Return Temperature
$VWART_{NKWM}$	Non-Keep Warm Volume Weighted Average Return Temperature
$VWART_{WINTER}$	Annual Volume Weighted Average Return Temperature for Heating Period
$VWART_{SUMMER}$	Annual Volume Weighted Average Return Temperature for Non-Heating Period
$VWART_{HIU}$	Total Annual Volume Weighted Average Return Temperature
$W_{thermal}$	Thermal energy use
$W_{electrical}$	Electrical energy use
SH_{PROP}	Annual heating period
NSH_{PROP}	Annual non-space heating period
TMV	Thermostatic mixing valve
TRV	Temperature regulating valve
UFH	Underfloor heating
DHW	Domestic Hot Water
HIU	Heat Interface Unit

DPCV	Differential pressure control valve
DRV	Double regulating valve
SH	Space Heating
UKAS	United Kingdom Accreditation Service
EIL	Enertek International Limited

4 INTRODUCTION

4.1 Installation of Appliance

- 4.1.1 The appliance was installed and commissioned (as received) and as defined in the product literature provided. Testing was carried out without further adjustment other than disabling the internal space heating pump and adjusting the setting of the SH and DHW set points through the user interface on the HIU controller to suit the conditions of the HIU test rig.
- 4.1.2 The HIU rig schematic is shown within Figure 1.
- 4.1.3 The HIU was commissioned in accordance with the technical manual / installation guide provided by Cetetherm.

4.2 Appliance Details

- 4.2.1 Details of the HIU Cetetherm Pioneer appliance are given in Table 6. Photographs of the installed appliance are given in Figure 20 and Figure 21.
- 4.2.2 The UK declaration of conformity (CE or UKCA or equivalent) and water regulation 4 certificate can be found within APPENDIX C.

Table 6 - Appliance Details

Item	Description
Manufacturer	Cetetherm
Model	Pioneer
Serial Number	73949023352001
Year of Manufacture	2023
DHW Priority	N
EUT Number	EUT 0679
Date Test Item Received	08/01/2024

4.3 Appliance Design Pressures and Temperatures

- 4.3.1 The maximum design pressures and temperatures of the Cetetherm Pioneer appliance for the primary side and the secondary side for both Space Heating and DHW are given in Table 7.

Table 7 - Appliance Design Pressures and Temperatures

Item	Pressure (bar)	Differential Pressure (bar)	Temperature (°C)
Primary Side	16	6	120
Secondary Side Space Heating	10	-	90
Secondary Side DHW	10	-	90

5 TEST METHOD

5.1 Test Regime

- 5.1.1 The testing described in this report was carried out in accordance with the test regime. The test regime outlines a series of static and dynamic tests to determine the performance of a HIU's DHW and SH functions. The test regime outlines the test method including the reporting of the results, the performance requirements and the VWART calculations.
- 5.1.2 Testing was carried out in accordance with Test Module 1.
- 5.1.3 Testing was carried out in accordance with Test Module 2.
- 5.1.4 Testing was carried out in accordance with Test Module 7.
- 5.1.5 Testing was carried out in accordance with Test Module 8.

5.2 Measurement & Uncertainties

- 5.2.1 All measurements and uncertainties adhere to the requirements stipulated in the BESA Test Regime. All measurements were sampled at a rate of 1 Hz for all tests.
- 5.2.2 The BESA uncertainties of measurement requirements are as follows:
 - Differential Pressure, $\pm 1.0 \text{ kPa}$
 - Temperature, $\pm 0.1 \text{ }^{\circ}\text{C}$
 - Volume Flow ($\geq 0.06 \text{ l/s}$) $\pm 1.5 \%$
 - Volume flow ($< 0.06 \text{ l/s}$), $\pm 3.0 \%$.

Note: the time constant for the temperature sensors is less than 1.5 s. The time constant for the differential pressure sensors is less than 5s.

- 5.2.3 EIL's reported uncertainty is based on a standard uncertainty by a coverage factor K=2, providing a level of confidence of approximately 95%. The uncertainty evaluation has been carried out in accordance with UKAS requirements. The EIL equipment list and uncertainties given are shown within chapter 11.

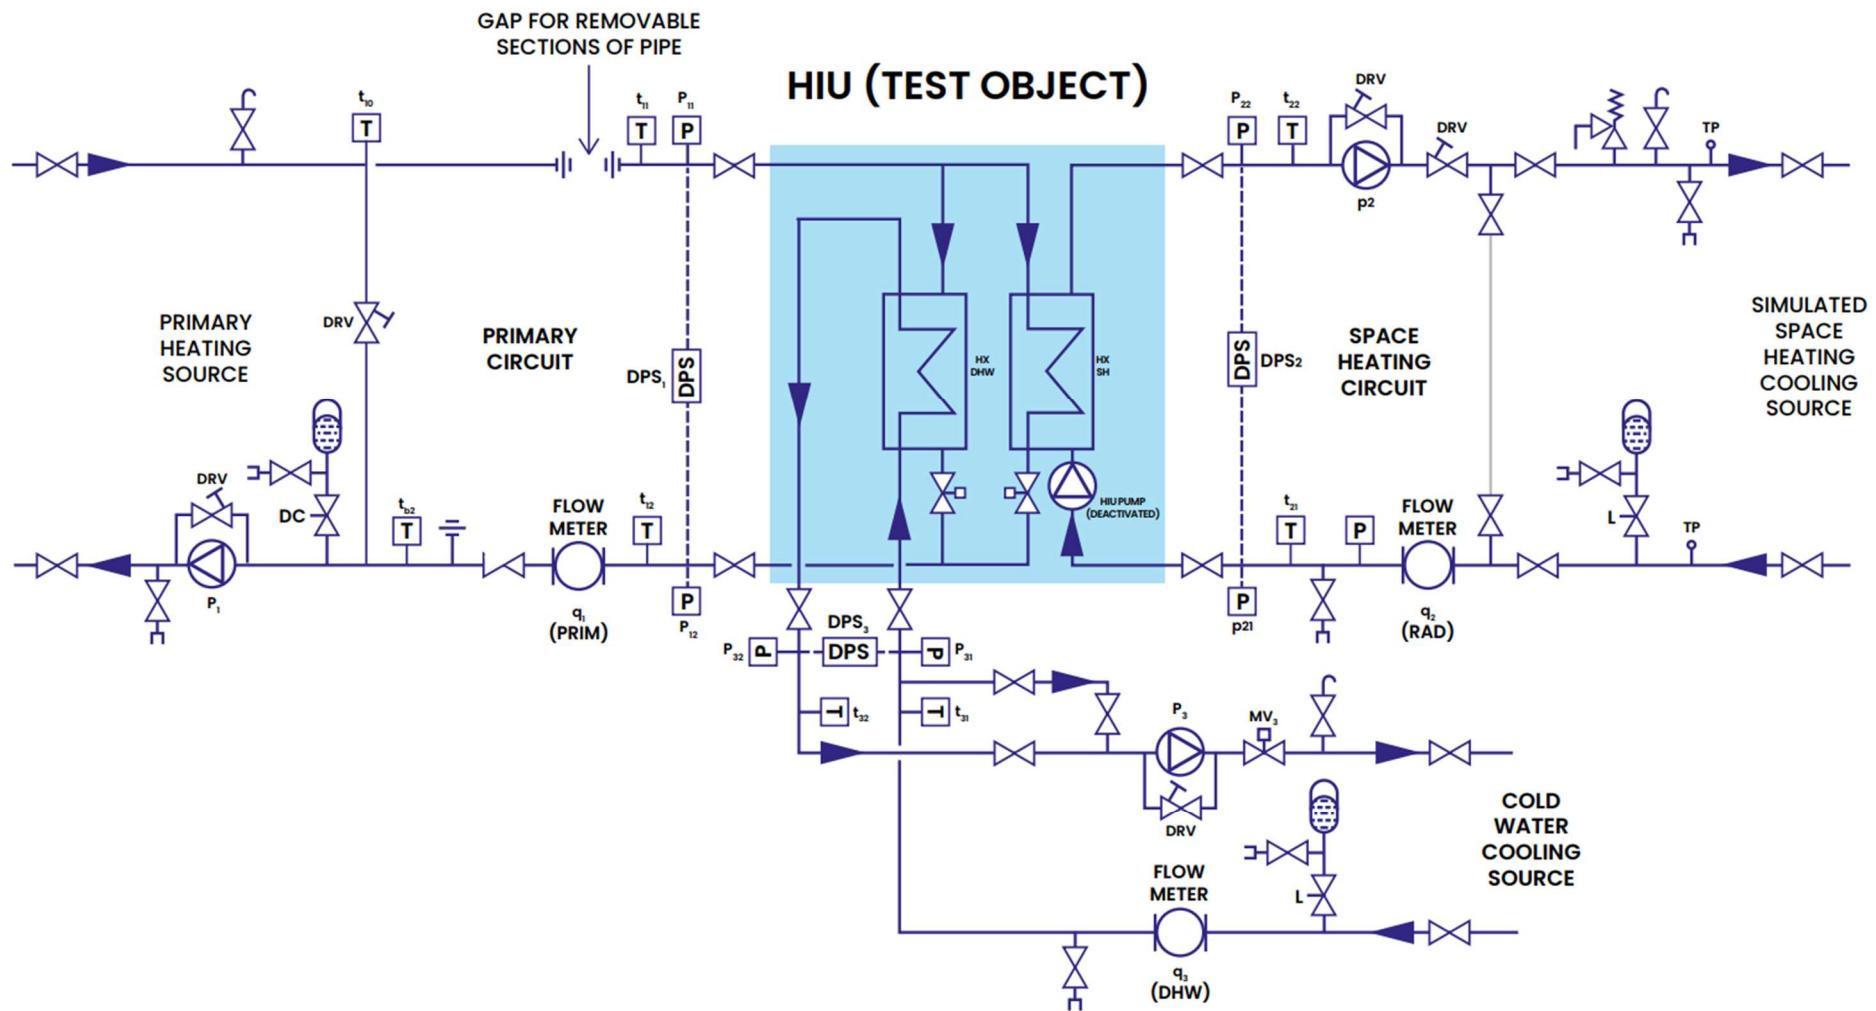


Figure 1 - EIL's HIU Test Rig schematic which is taken from Appendix B, Figure 4, of Technical Standard for UK HIU Test Regime Version 3: 2023

6 TEST MODULE 1 - SPACE HEATING, HIGH TEMPERATURE, DH70 INDIRECT

6.1 Test Module 1 Information

- 6.1.1 Objective: Perform static testing to investigate the performance characteristics of the HIU when indirectly meeting a space-heating load given a 55°C/35°C tertiary heating circuit and 70°C primary flow temperature.
- 6.1.2 The following set of tests are from test module 1 – space heating, high temperature, indirect heating module 1-DH70 indirect HM1-DH70C.

Table 8 - Module 1 Tests

Module 1 Tests	
01a	DH/70C, Space Heating Indirect 0.5 kW, 55/35°C tertiary, 50 kPa
01b	DH/70C, Space Heating Indirect 1 kW, 55/35°C tertiary, 200 kPa
01c	DH/70C, Space Heating Indirect 4 kW, 55/35°C tertiary, 50 kPa

6.2 Test Module 1 Results

- 6.2.1 Performance criteria results can be seen in Table 9, Test result data can be seen in Table 11 and key metrics can be found in Figure 2, Figure 3 and Figure 4. Best practice criteria can be found in table 10.

Table 9 - Module 1 Performance Criteria

Module 1 Tests Performance Criteria	
Performance Criteria, Fail if:	PASS/FAIL
VWART (fail if the VWART is above 40°C)	Pass

Table 10 - Module 1 Best Practice

Module 1 – Best Practice Criteria	
Best Practice Criteria if:	Best Practice
VWART is below 37 °C	Achieved

Table 11 - Module 1 Test Results

Module 1 Test Results				
Parameter	Symbol	01a (0.5kW)	01b (1kW)	01c (4kW)
Temperature, primary side flow connection	t_{11} (°C)	70.0	69.6	70.5
Temperature, primary side return connection	t_{12} (°C)	35.3	35.6	36.2
Volume flow, primary side	q_1 (l/s)	0.0052	0.0089	0.030
Differential pressure, primary system across HIU	dP_1 (kPa)	50	201	51
Arithmetic mean of primary side power recorded during test	H_1 (W)	752	1272	4269
Temperature, space heating system return connection	t_{21} (°C)	34.6	34.8	34.8
Temperature, space heating system flow connection	t_{22} (°C)	55.1	54.6	54.6
Volume flow, space heating system	q_2 (l/s)	0.0063	0.014	0.050
Differential pressure, space heating system across HIU	dP_2 (kPa)	24	24	26
Arithmetic mean of space heating power during test	H_2 (W)	524	1109	4142
Volume Weighted Avg. Return Temp	VWART (°C)	35	36	36
Total VWART (°C)		36		

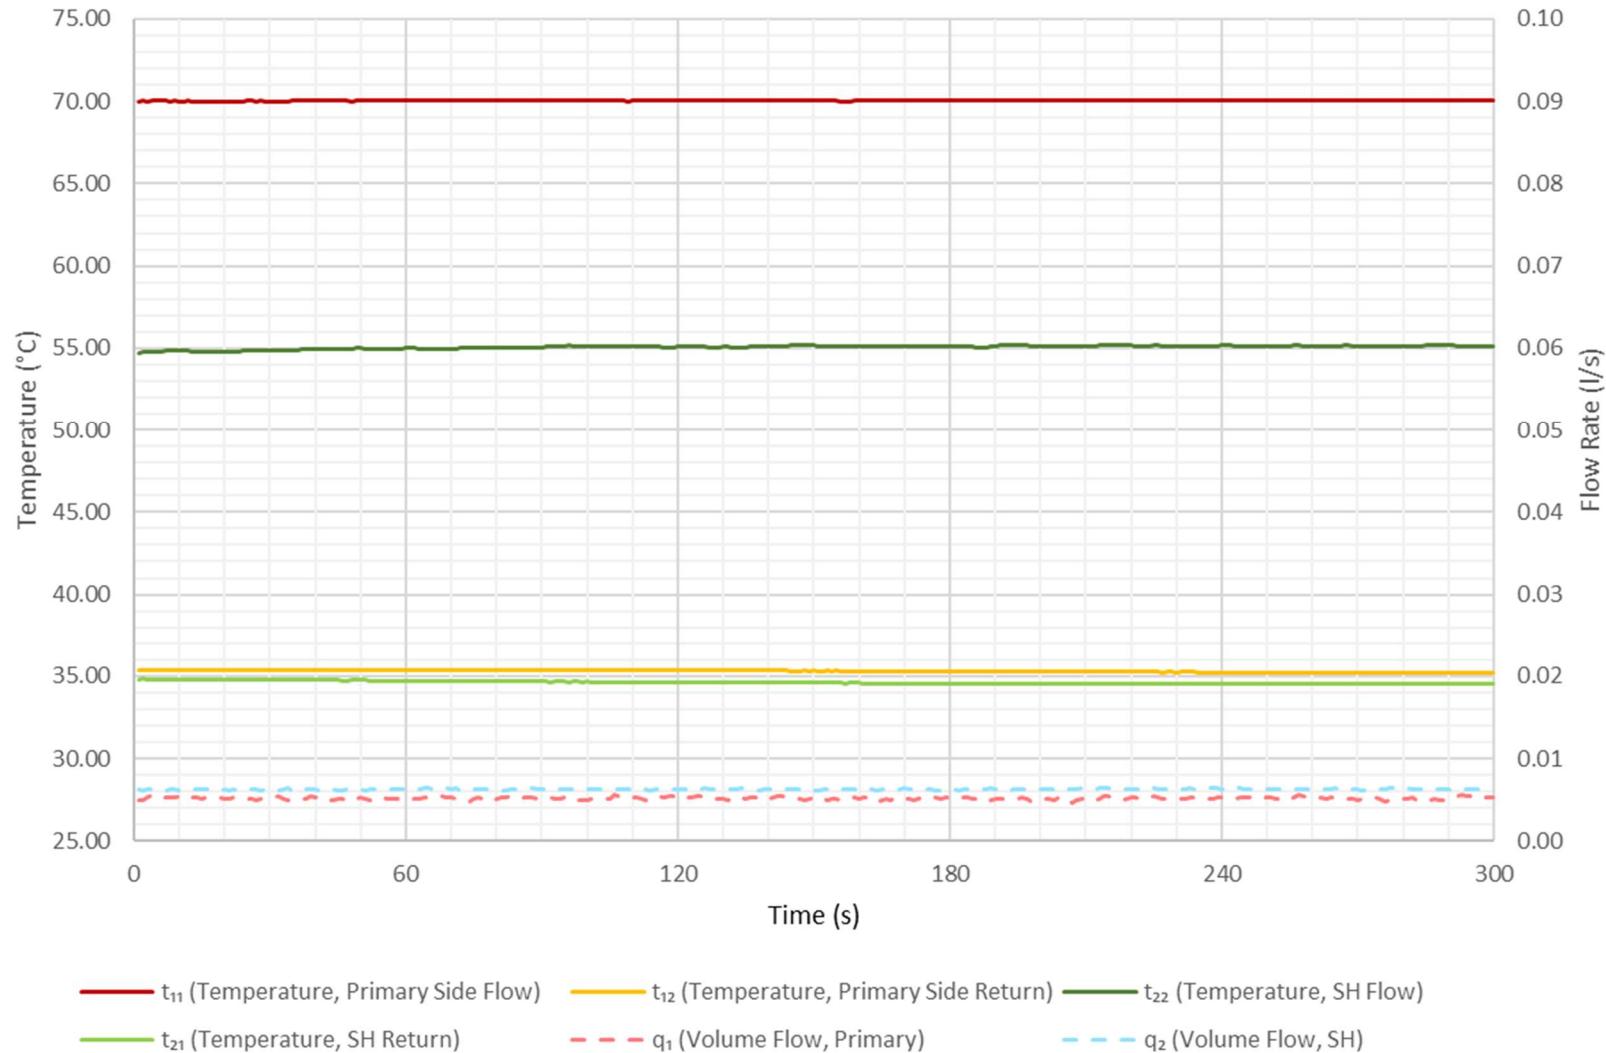


Figure 2 - Test 01a Key Metrics

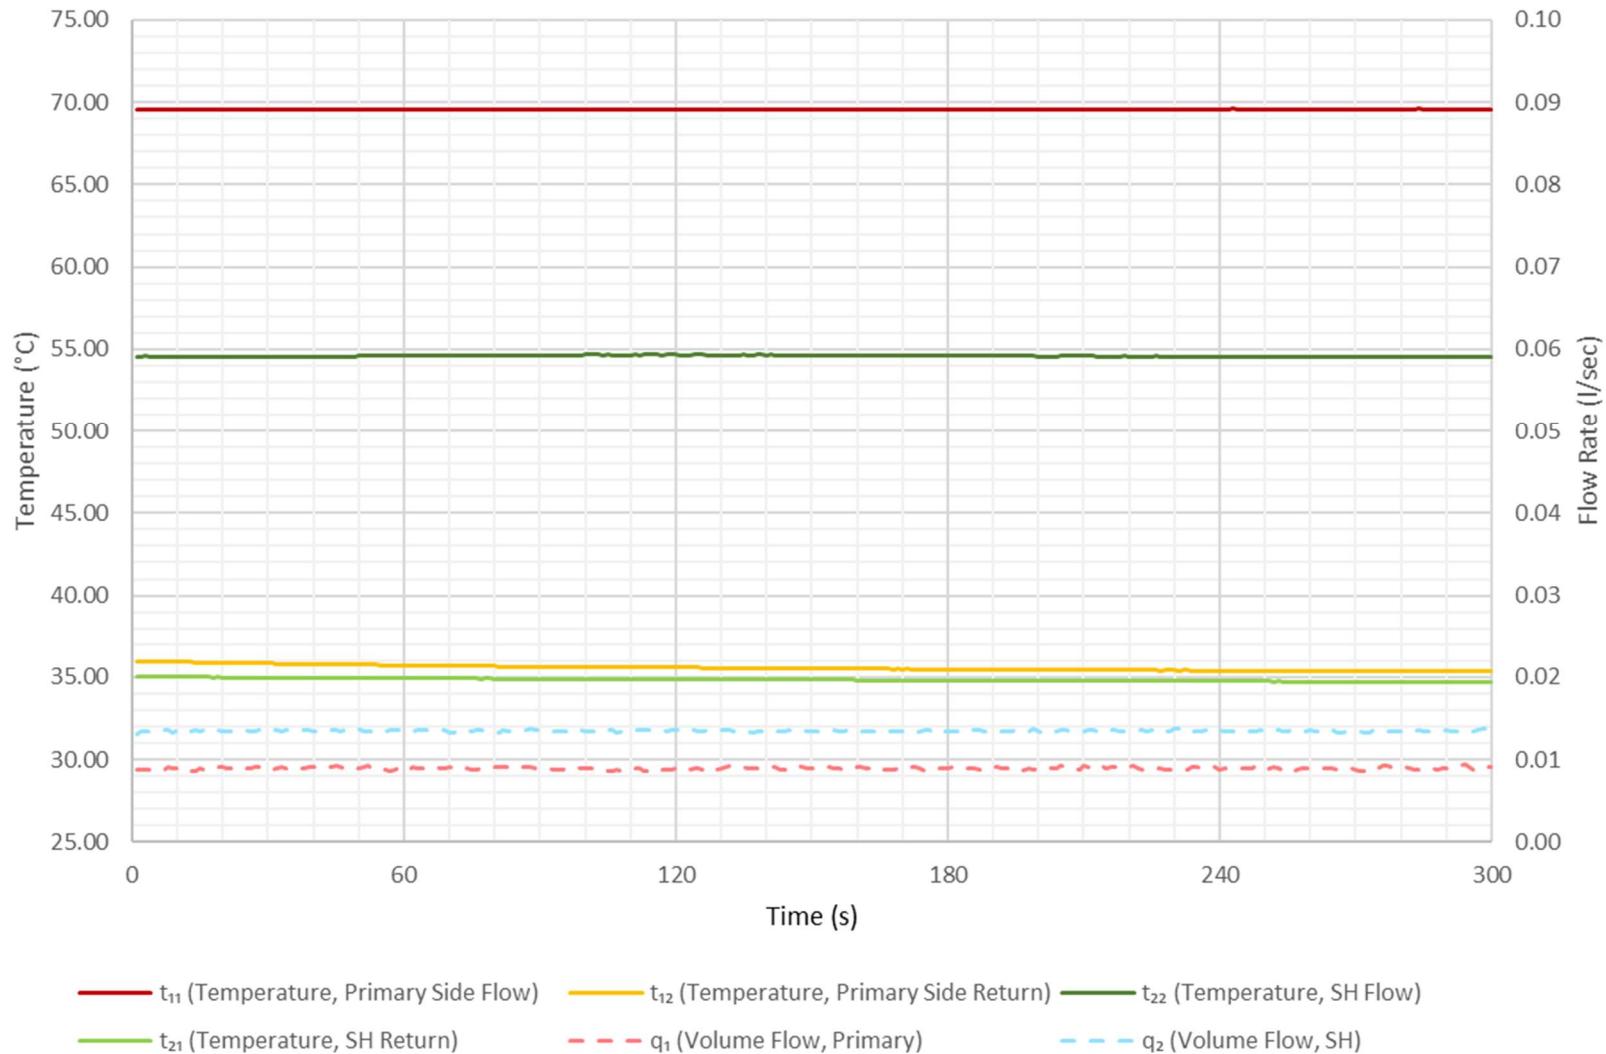


Figure 3 - Test 01b Key Metrics

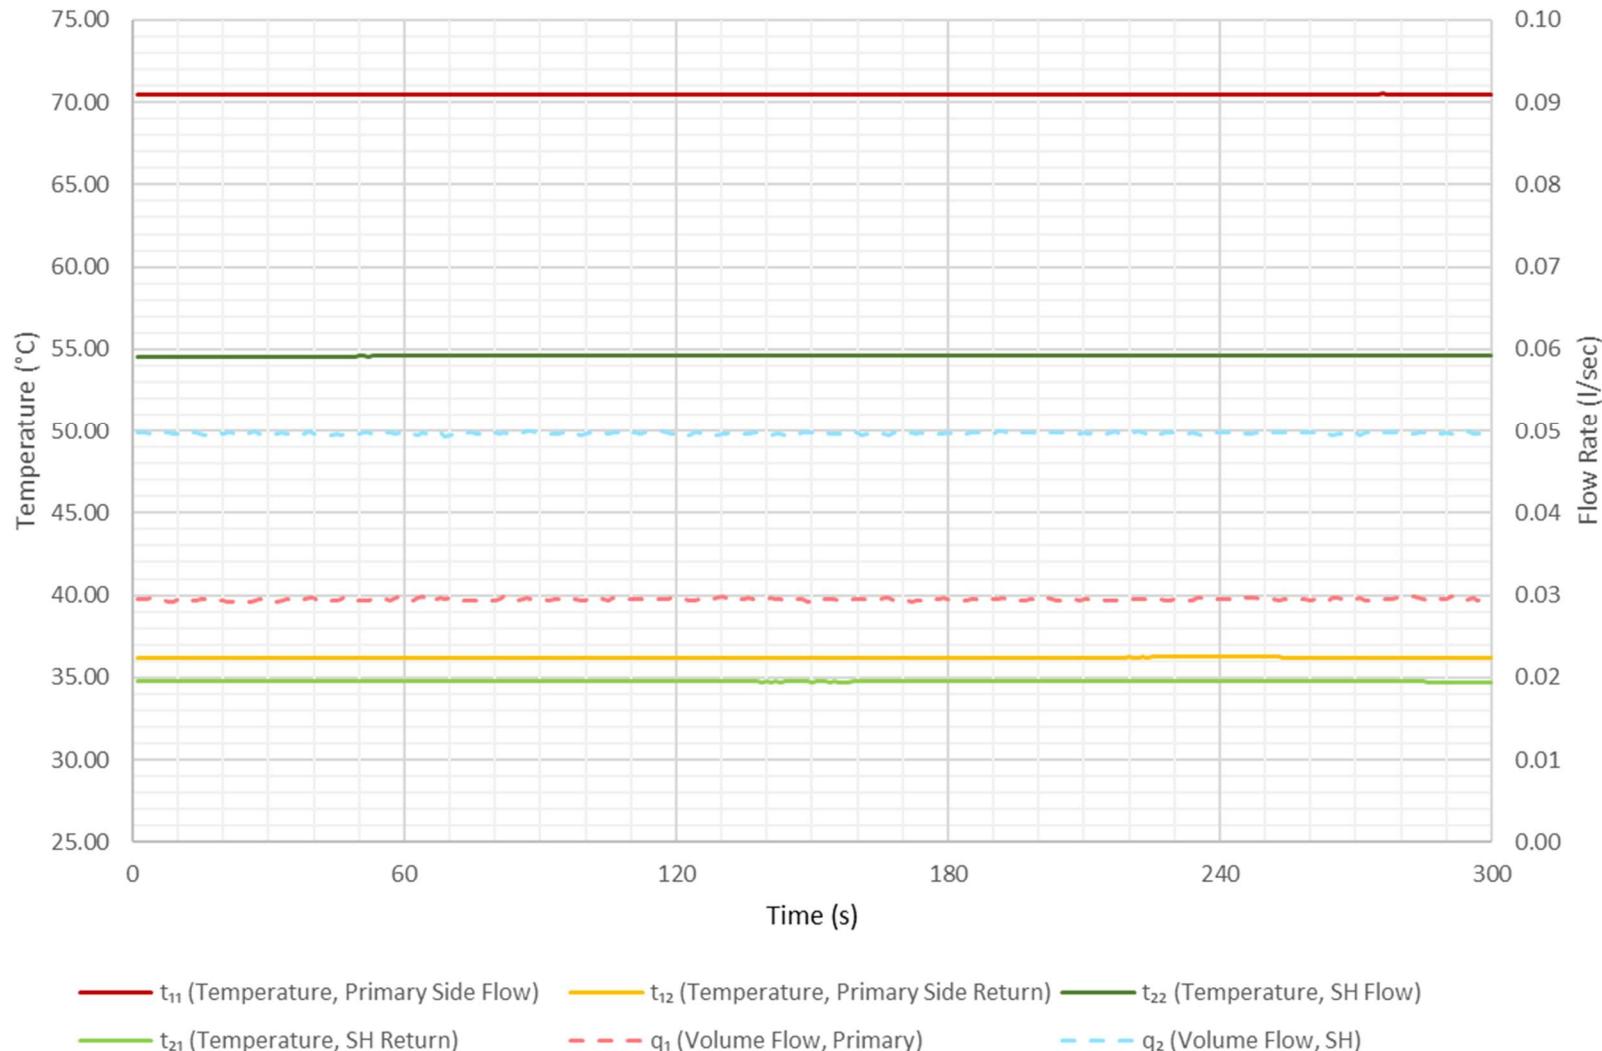


Figure 4 - Test 01c Key Metrics

7 TEST MODULE 2 - SPACE HEATING, LOW TEMPERATURE, DH55 INDIRECT

7.1 Test Module 2 Information

- 7.1.1 Objective: Perform static testing to investigate the performance characteristics of the HIU when indirectly meeting a space-heating load given a 45°C/35°C tertiary heating circuit and 55°C primary flow temperature.
- 7.1.2 The following set of tests are from test module 2 - Space Heating, Low Temperature, Indirect HEATING MODULE 2-DH55 Indirect HM2-DH55C.

Table 12 - Module 2 Tests

Module 2 Tests	
01d	DH/55C, Space Heating Indirect 0.5 kW, 45/35°C tertiary, 50 kPa
01e	DH/55C, Space Heating Indirect 1 kW, 45/35°C tertiary, 200 kPa
01f	DH/55C, Space Heating Indirect 4 kW, 45/35°C tertiary, 50 kPa

7.2 Test Module 2 Results

- 7.2.1 Performance criteria results can be seen in Table 13, Test result data can be seen in Table 15 and key metrics can be found in Figure 5, Figure 6 and Figure 7. Best practice criteria can be found in table 14.

Table 13 - Module 2 Performance Criteria

Module 2 Tests Performance Criteria	
Performance Criteria, Fail if:	PASS/FAIL
VWART (fail if the VWART is above 40°C)	Pass

Table 14 - Module 2 Best Practice

Module 2 – Best Practice Criteria	
Best Practice Criteria if:	Best Practice
VWART is below 37 °C	Achieved

Table 15 - Module 2 Test Results

Module 2 Test Results				
Parameter	Symbol	01d (0.5kW)	01e (1kW)	01f (4kW)
Temperature, primary side flow connection	t_{11} (°C)	54.8	54.5	54.8
Temperature, primary side return connection	t_{12} (°C)	34.6	36.0	36.6
Volume flow, primary side	q_1 (l/s)	0.0081	0.015	0.055
Differential pressure, primary system across HIU	dP_1 (kPa)	51	201	50
Arithmetic mean of primary side power recorded during test	H_1 (W)	683	1152	4222
Temperature, space heating system return connection	t_{21} (°C)	34.9	35.4	35.5
Temperature, space heating system flow connection	t_{22} (°C)	45.0	45.3	45.3
Volume flow, space heating system	q_2 (l/s)	0.013	0.024	0.100
Differential pressure, space heating system across HIU	dP_2 (kPa)	25	26	28
Arithmetic mean of Space heating power during test	H_2 (W)	530	970	4132
Volume Weighted Avg. Return Temp	VWART (°C)	35	36	37
Total VWART (°C)		36		

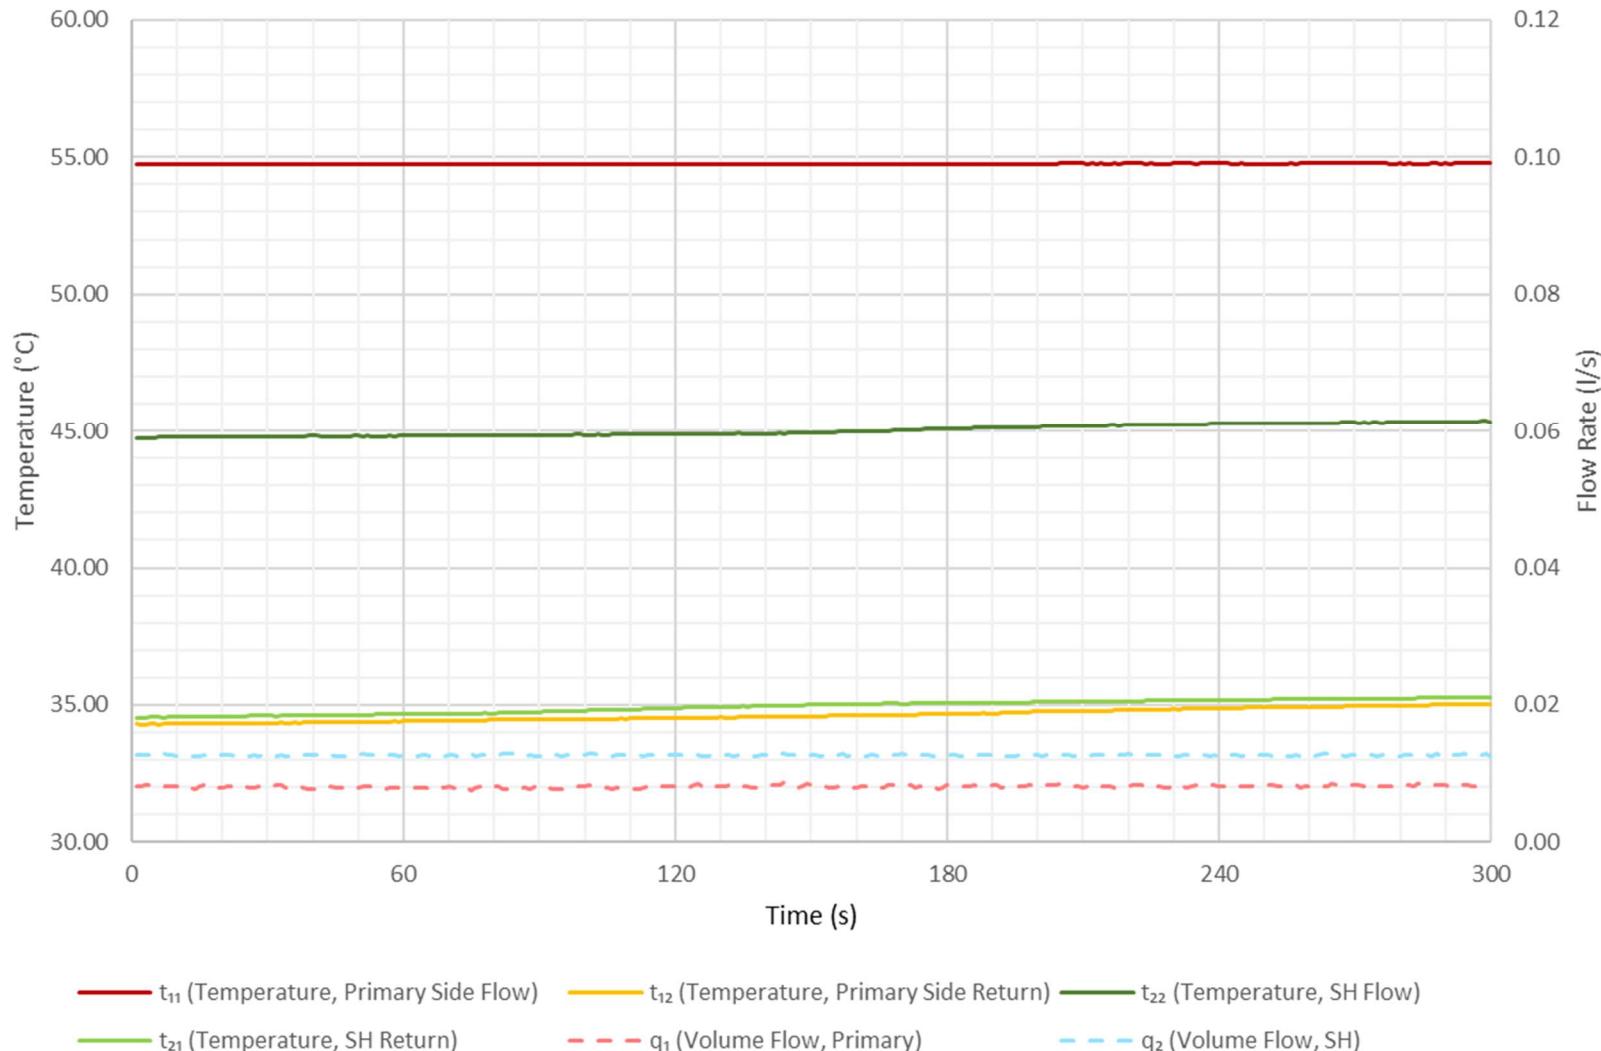


Figure 5 - Test 01d Key Metrics

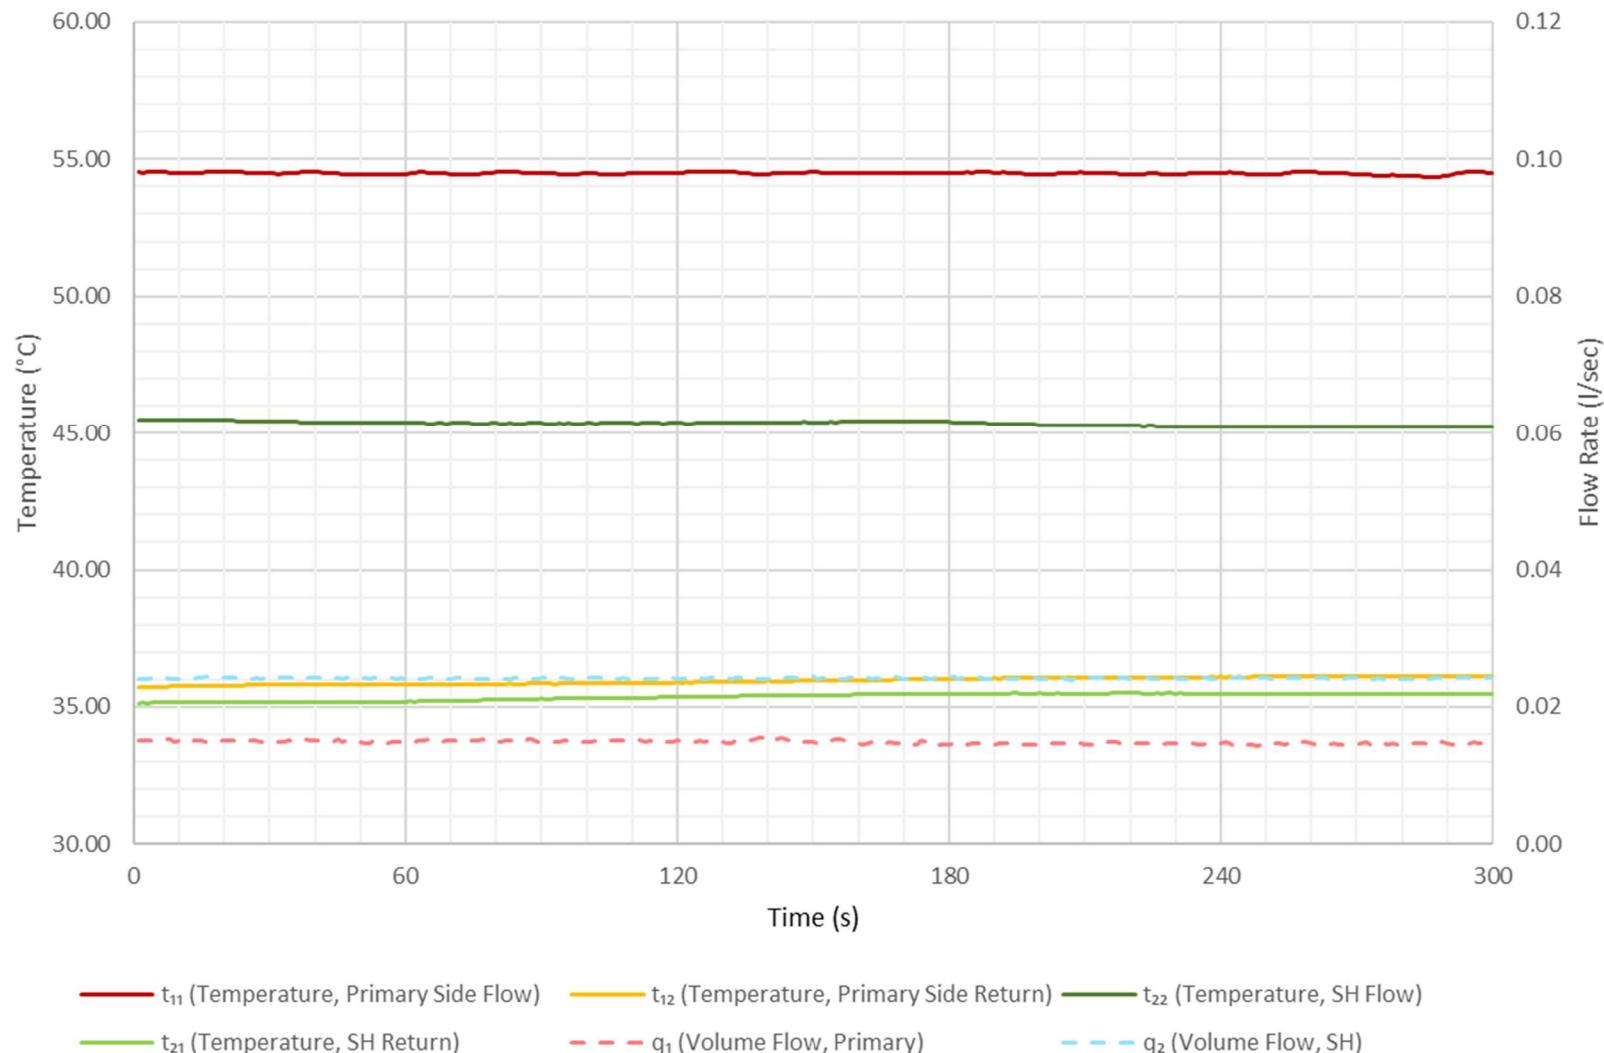


Figure 6 - Test 01e Key Metrics

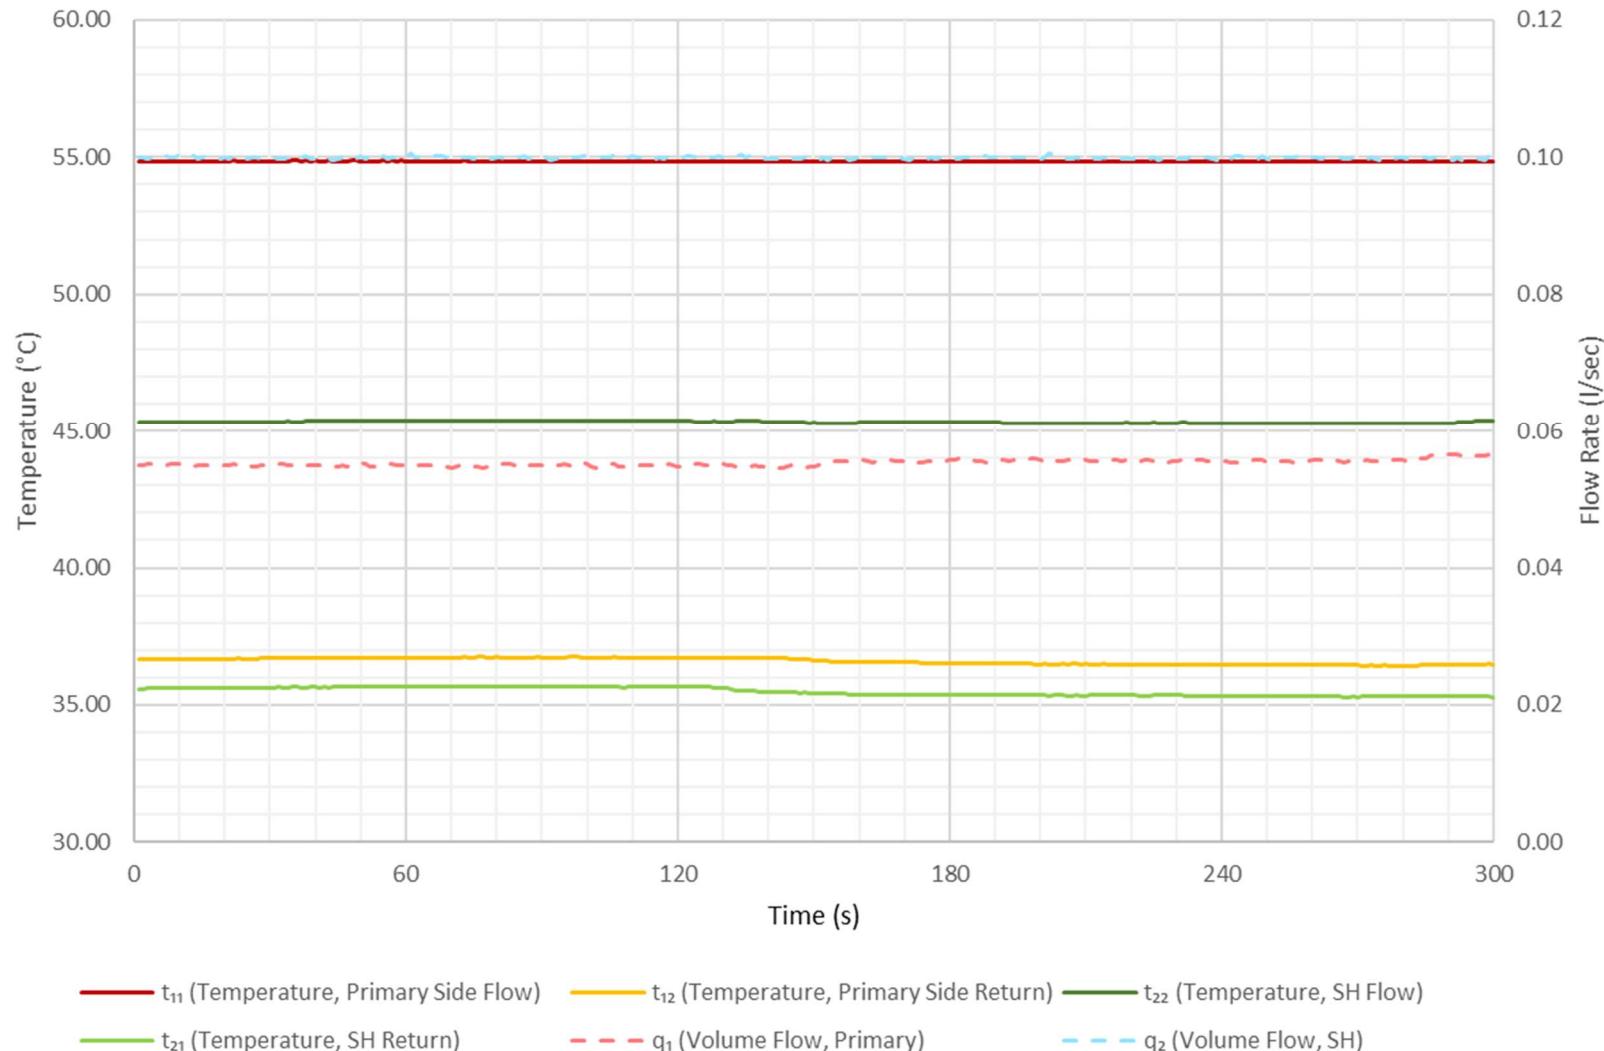


Figure 7 - Test 01f Key Metrics

8 TEST MODULE 7 – DHW, HIGH TEMPERATURE, DH70-KWARM

8.1 Test Module 7 Information

- 8.1.1 Objective: To explore the performance of the HIU under changing loads, as would be the case in practical operation. Key performance criteria are speed and consistency of DHW delivery to the customer; DHW staying at a safe temperature at all times and the volume weighted average return temperature when supplying space heating or DHW.
- 8.1.2 The following set of tests are from test module 7 – Domestic hot water, high temperature, keep warm hot water module 7-DH70-KWarm.

Table 16 - Module 7 Tests

Module 7 Tests	
11a	DH/70C, DHW only, 50°C DHW, Variable dP
12a	DH/70C, DHW Low Flow, 50°C DHW, 50kPa
12c	DH/70C, DHW Low Flow, 50°C DHW, 200kPa
13a	DH/70C, DHW Load Test, 50°C DHW
21a	DH/70C, DHW Keep Warm, 50°C DHW
22a	DH/70C, DHW Keep Warm Response Time, 50°C DHW

8.2 Test 11a Information

- 8.2.1 Objective: To investigate the performance of the HIU when delivering DHW, at a range of flow rates and differential pressures, given a 70°C primary flow temperature. The test investigates HIU operation in terms of DHW delivery and impacts on primary heat network return temperatures.

8.3 Test 11a Results

8.3.1 Performance criteria results can be seen in Table 17 test result data can be seen in Table 18 and key metrics can be found in Figure 8. Best practice criteria can be found in table 19.

Table 17 - Module 7, Test 11a Results

Module 7 - Test 11a Results			
Parameter	Symbol	Result	
Maximum and minimum values of t_{32} when there is DHW flow	t_{32} (°C)	56.9	46.8
Number of consecutive seconds where $t_{32} > 55^\circ\text{C}$	(s)	17	
Volume Weighted Avg. Return Temp	VWART (°C)	15	

Table 18 - Module 7, Test 11a Performance Criteria

Module 7 - Test 11a Performance Criteria	
Performance Criteria, Fail if:	PASS/FAIL
Fail if DHW temperature (t_{32}) exceeds 60.0°C (to one decimal place) for more than 1 second, as this poses a scalding risk	Pass
Fail if primary return temperature (t_{12}) exceeds 55.0°C (to one decimal place) at any point, as this poses a scaling risk	Pass
Fail if the VWART is above 22°C (to one decimal place)	Pass
Fail if the average DHW temperature (t_{32}) is not 50.0°C ±1°C (to one decimal place) for the final 150 seconds of each of the 180 second DHW flow periods	Pass
Fail if the DHW temperature (t_{32}) is not being maintained at 50.0°C ±3°C (to one decimal place) for >150 seconds of each of the DHW flow periods	Pass
Fail if the DHW temperature (t_{32}) drops below 45.0°C (to one decimal place) for more than 5 consecutive seconds, as this would impact resident comfort	Pass

Table 19 - Module 7 - Test 11 Best Practice

Module 7 – Test 11 – Best Practice Criteria	
Best Practice Criteria if:	Best Practice
Best practice if the VWART is less than 17°C (to one decimal place)	Achieved
Best practice if the DHW temperature (t_{32}) is being maintained at 50.0°C ±2°C throughout periods of DHW flow	Not Achieved
Best practice if the DHW temperature (t_{32}) doesn't drop below 45.0°C (to one decimal place) for more than 2 consecutive seconds	Achieved

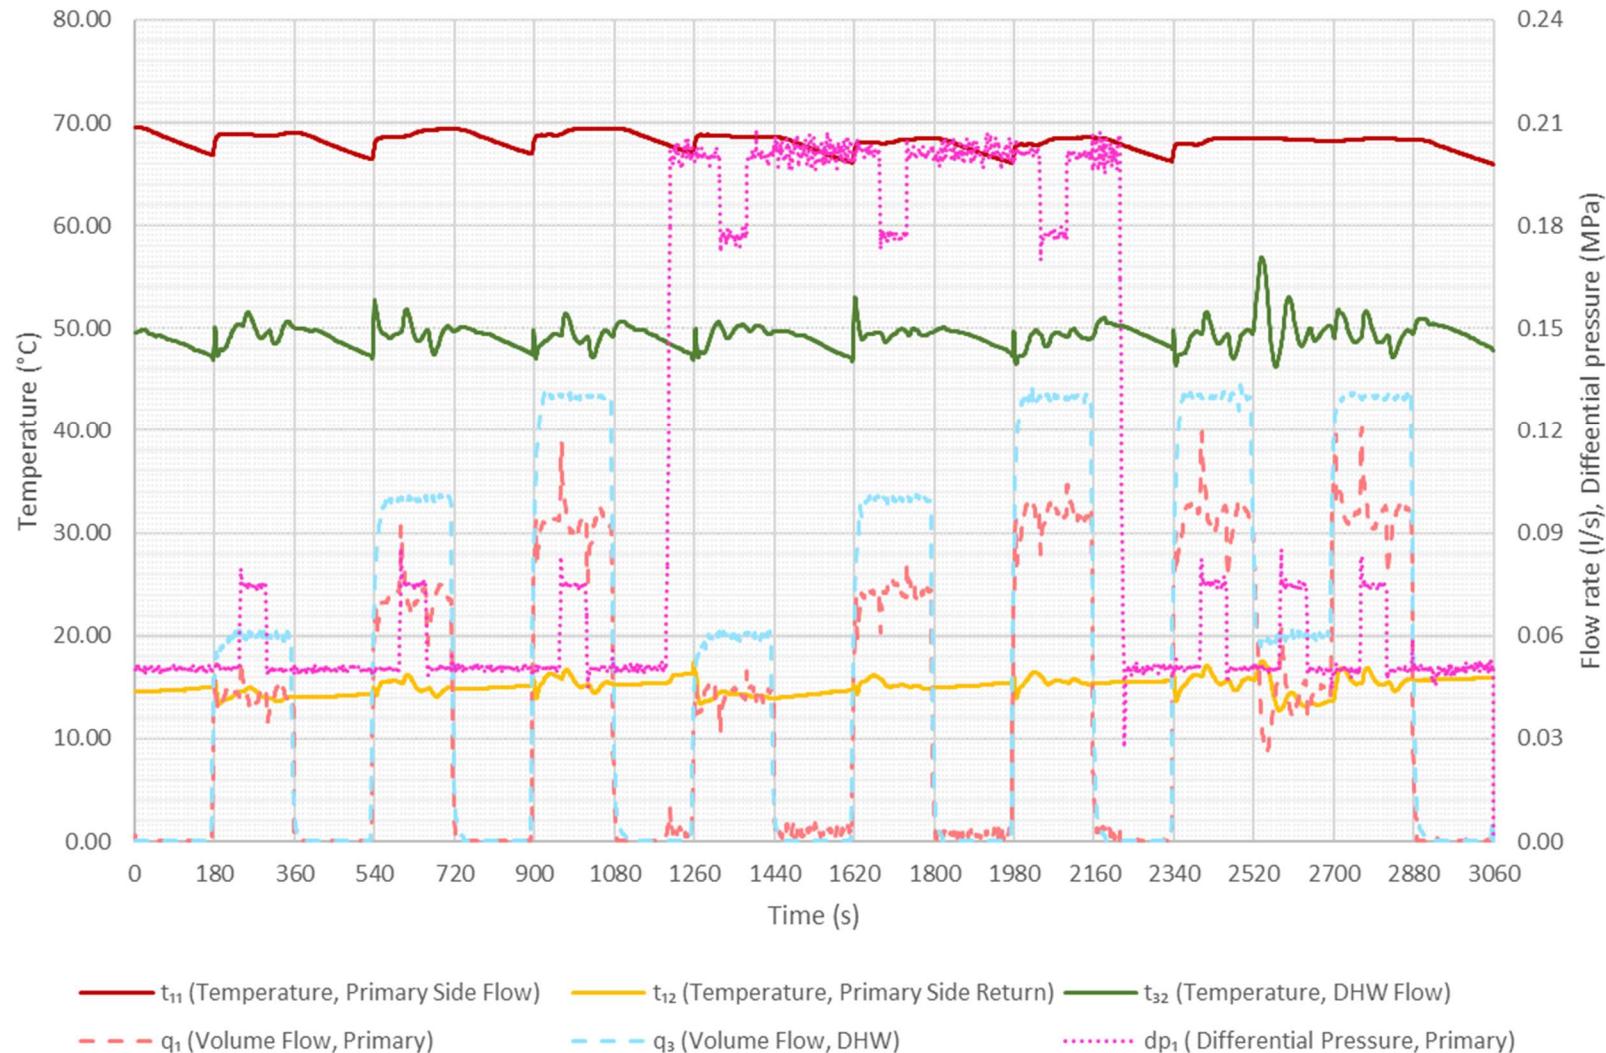


Figure 8 - Test 11a Key Metrics

8.4 Test 12a / 12c Information

8.4.1 Objective: To investigate the stability of DHW temperature at low flow rates. During operation, domestic hot water is sometimes drawn off at extremely low flow rates. Test 12 investigates the ability of the system to meet this condition by measuring the temperature at test point t_{32} at a flow rate of 0.02 l/s.

8.5 Test 12a / 12c Results

- 8.5.1 The HIU was able to deliver DHW at low flow rate above 45.0°C at the end of the 180 second period of low flow DHW.
- 8.5.2 The HIU was able to deliver stable DHW flow temperature (at t_{32}), defined as ability to maintain $50.0 \pm 3.0^\circ\text{C}$ (1 decimal place) during the last 60 seconds of the test.
- 8.5.3 Performance criteria results can be seen in Table 21, Test result data can be seen in Table 20 and key metrics can be found in Figure 9 and Figure 10. Best practice criteria can be found in table 22.

Table 20 - Module 7, Test 12 Results

Module 7 - Test 12 Results					
Parameter	Symbol	12a Result		12c Result	
Maximum and minimum values of t_{32} when there is low DHW flow	t_{32} (°C)	52.9	49.2	52.3	49.5
Number of consecutive seconds where $t_{32} > 55^\circ\text{C}$	(s)	0	0	0	0

Table 21 - Module 7, Test 12 Performance Criteria

Module 7 - Test 12 Performance Criteria	
Performance Criteria, Fail if:	PASS/FAIL
Fail if DHW temperature (t_{32}) exceeds 60.0°C (to one decimal place) for more than 1 second, as this poses a scalding risk	Pass
Fail if primary return temperature (t_{12}) exceeds 55.0°C (to one decimal place) at any point, as this poses a scaling risk	Pass
Fail if DHW temperature (t_{32}) is not maintained at $50.0^\circ\text{C} \pm 3^\circ\text{C}$ (to one decimal place) for more than 60 seconds	Pass

Table 22 - Module 7 - Best Practice

Module 7 – Test 12 – Best Practice Criteria	
Best Practice Criteria if:	Best Practice
Best practice if DHW temperature (t_{32}) is maintained at $50^\circ\text{C} \pm 2^\circ\text{C}$ (to one decimal place) throughout the test for both test 12a and 12c.	Not Achieved

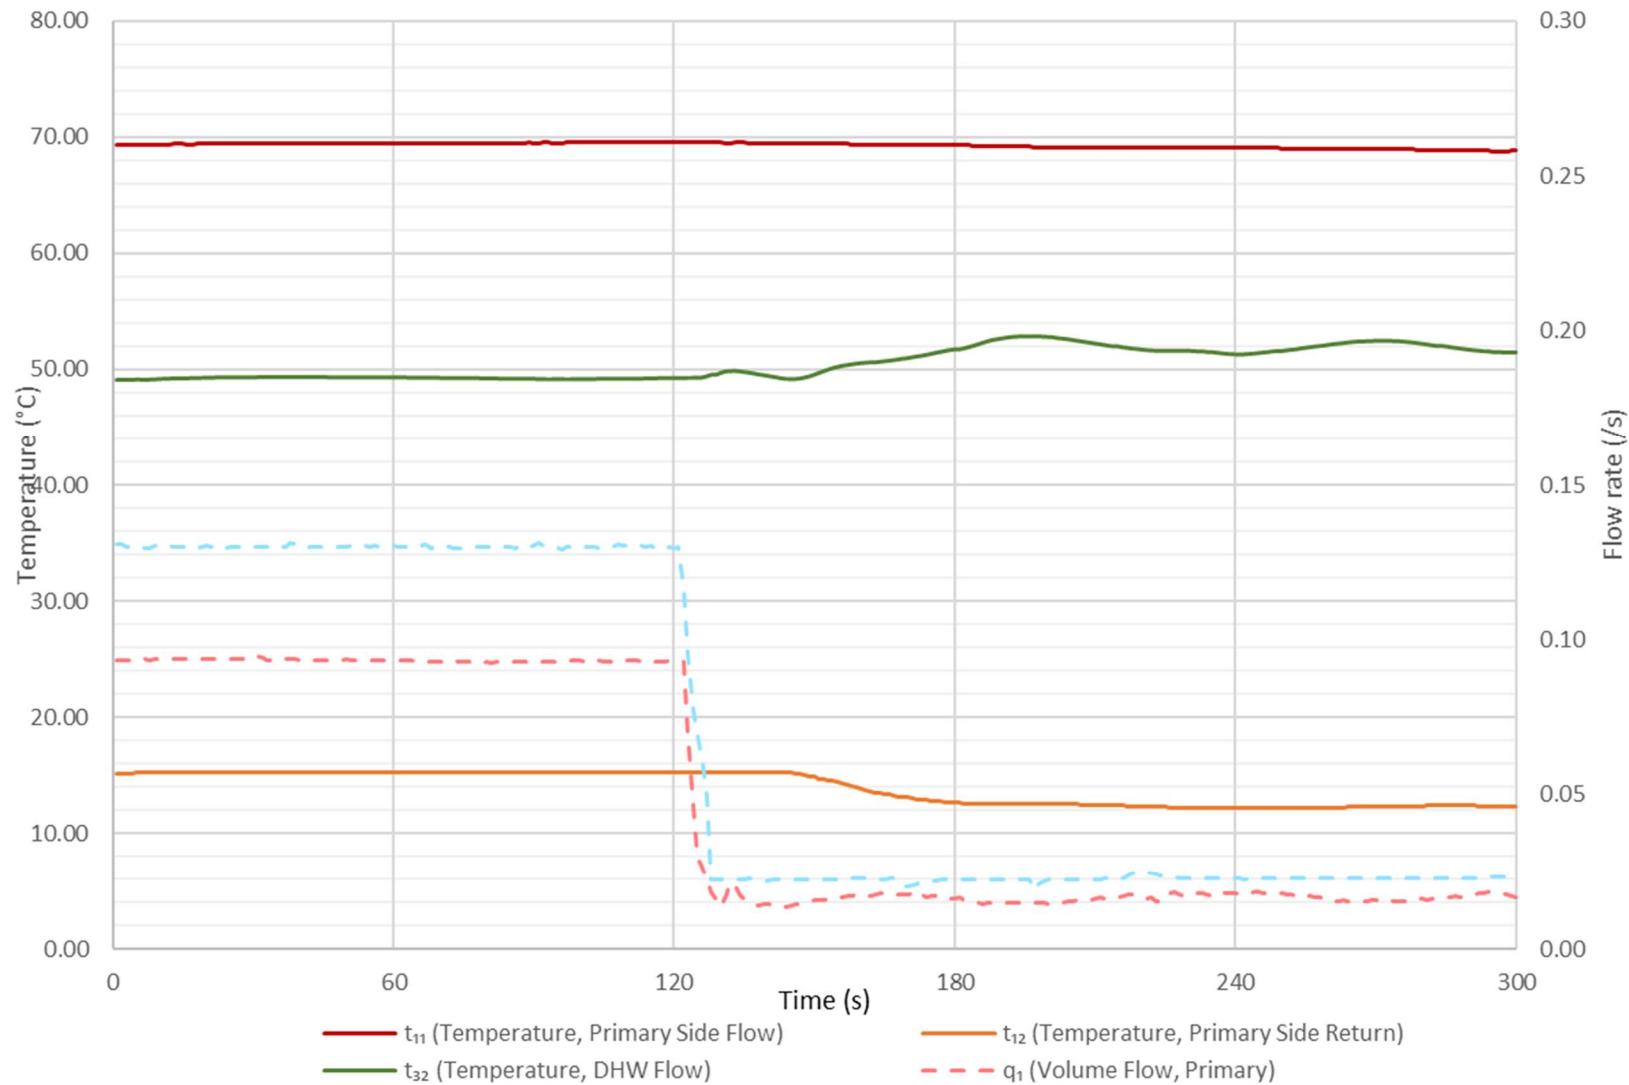


Figure 9 - Test 12a Key Metrics

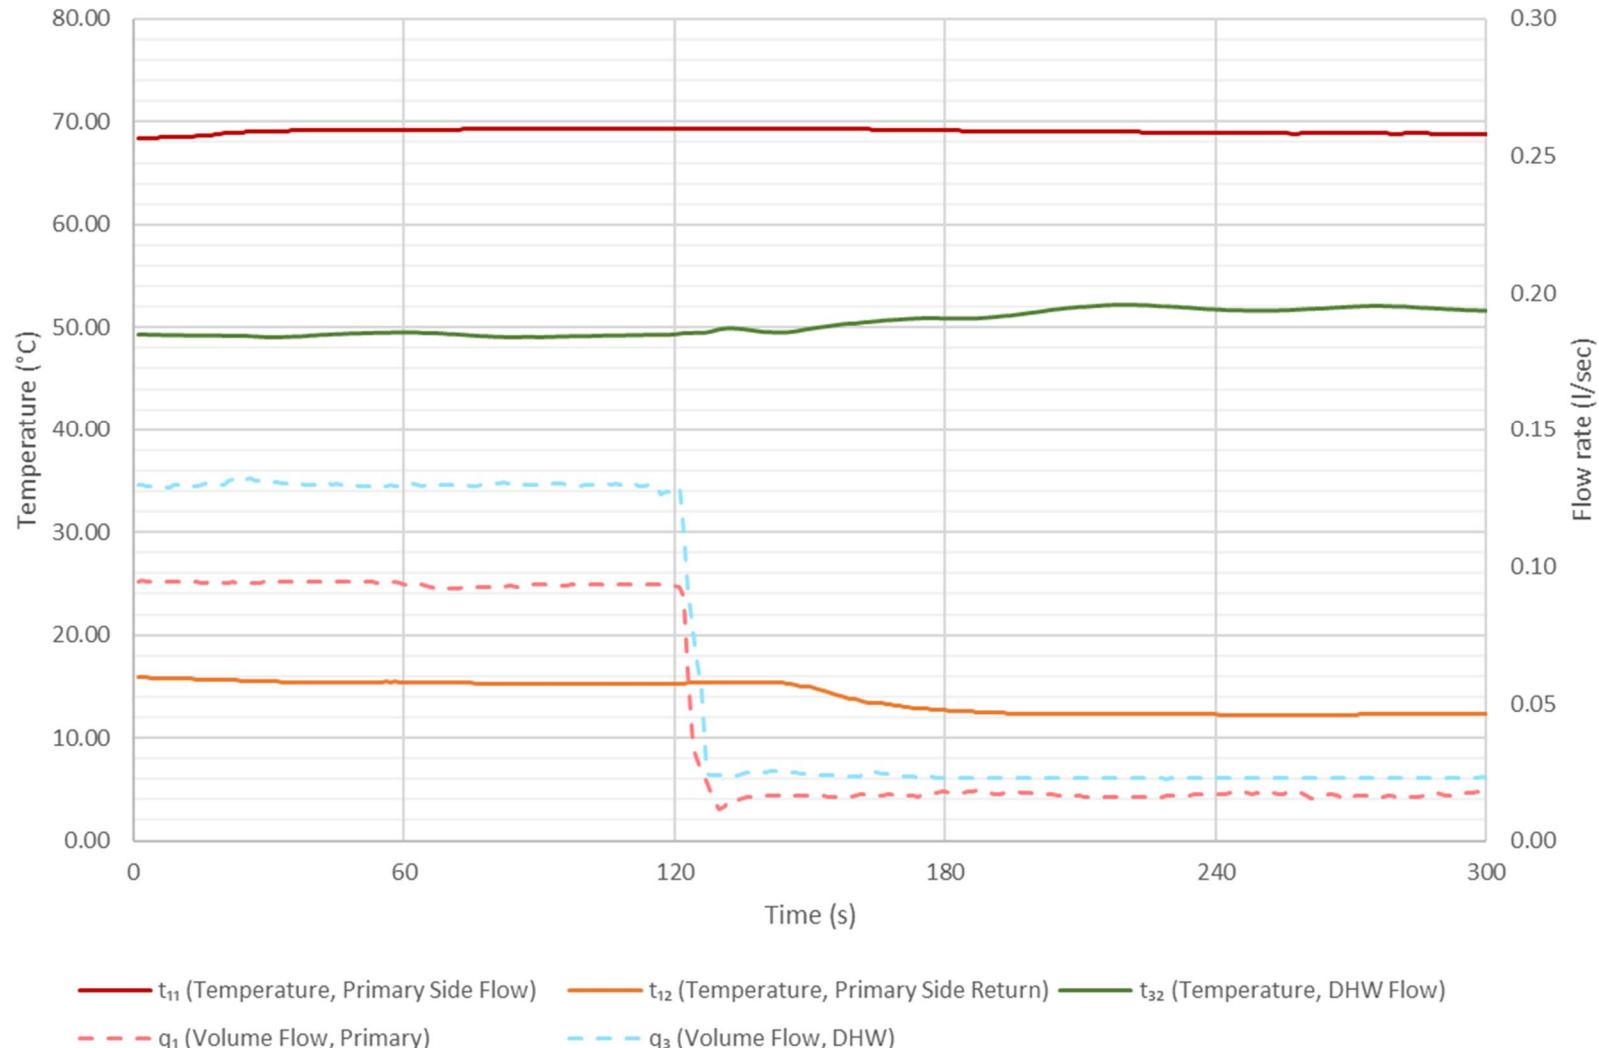


Figure 10 - Test 12c Key Metrics

8.6 Test 13a Information

- 8.6.1 Objective: To measure the maximum heat output (kW) and flow (l/sec) DHW output that can be delivered from the HIU. The HIU shall be set to deliver 50°C and the maximum DHW power output shall be measured with a flow step change and the peak value recorded when the DHW flow temperature is above 45°C.

8.7 Test 13a Results

- 8.7.1 The maximum DHW heat output was recorded as 67.6 kW, with a measured flow rate of 0.42 l/s, when producing minimum DHW at 45°C or above (46.8 °C).
- 8.7.2 The recorded DHW line pressure drop across the HIU was 140 kPa.
- 8.7.3 The number of consecutive seconds where $t_{32} > 55^\circ\text{C}$ was 0 seconds.
- 8.7.4 Performance criteria results can be seen in Table 23, Test result data can be seen in Table 24 and key metrics can be found in Figure 11.

Table 23 - Module 7, Test 13 Performance Criteria

Module 7 - Test 13 Performance Criteria	
Performance Criteria, Fail if:	PASS / FAIL
Fail if DHW (at t_{32}) is less than $50^\circ\text{C} \pm 1.0^\circ\text{C}$ (to one decimal place) at 0.13 l/s flow rate, as the HIU must be able to produce DHW to the target temperature at a moderate load	Pass
Fail if DHW temperature (t_{32}) exceeds 60.0°C (to one decimal place) for more than 1 second, as this poses a scalding risk	Pass
Fail if primary return temperature (t_{12}) exceeds 55.0°C (to one decimal place) at any point, as this poses a scaling risk	Pass

Table 24 - Module 7, Test 13a Results

Module 7 - Test 13a Results – Mean Average of Last 10 Seconds											
Parameter	Symbol	0.15 l/s (25kW)	0.18 l/s (30kW)	0.21 l/s (35kW)	0.24 l/s (40kW)	0.27 l/s (45kW)	0.30 l/s (50kW)	0.33 l/s (55kW)	0.36 l/s (60kW)	0.39 l/s (65kW)	0.42 l/s (70kW)
Temperature, primary side flow connection	t_{11} (°C)	69.9	70.2	70.3	70.3	70.3	70.3	70.2	70.1	69.9	69.7
Temperature, primary side return connection	t_{12} (°C)	15.6	16.4	16.7	17.6	18.2	18.7	20.0	20.0	20.4	20.6
Volume flow, primary side	q_1 (l/s)	0.108	0.130	0.152	0.179	0.206	0.284	0.297	0.283	0.311	0.334
Arithmetic mean of primary side power recorded during test	H_1 (kW)	24.33	28.95	35.49	39.72	44.78	59.98	59.06	59.24	63.92	52.57
Temperature, cold water supply	t_{31} (°C)	10.3	10.2	10.2	10.3	10.3	9.9	9.9	10.0	10.0	10.1
Temperature, domestic hot water flow from HIU	t_{32} (°C)	49.3	49.4	48.7	49.2	49.1	49.0	49.8	49.1	48.9	48.2
Volume flow, domestic hot water	q_3 (l/s)	0.151	0.179	0.210	0.240	0.271	0.301	0.337	0.360	0.390	0.424
Differential pressure, domestic hot water across HIU	dP_3 (kPa)	0.26	0.31	0.41	0.51	0.62	0.75	0.91	1.04	1.20	1.40
Arithmetic mean of DHW power recorded during test	H_3 (kW)	24.75	29.54	33.85	39.19	44.04	49.38	55.95	59.00	63.40	67.58

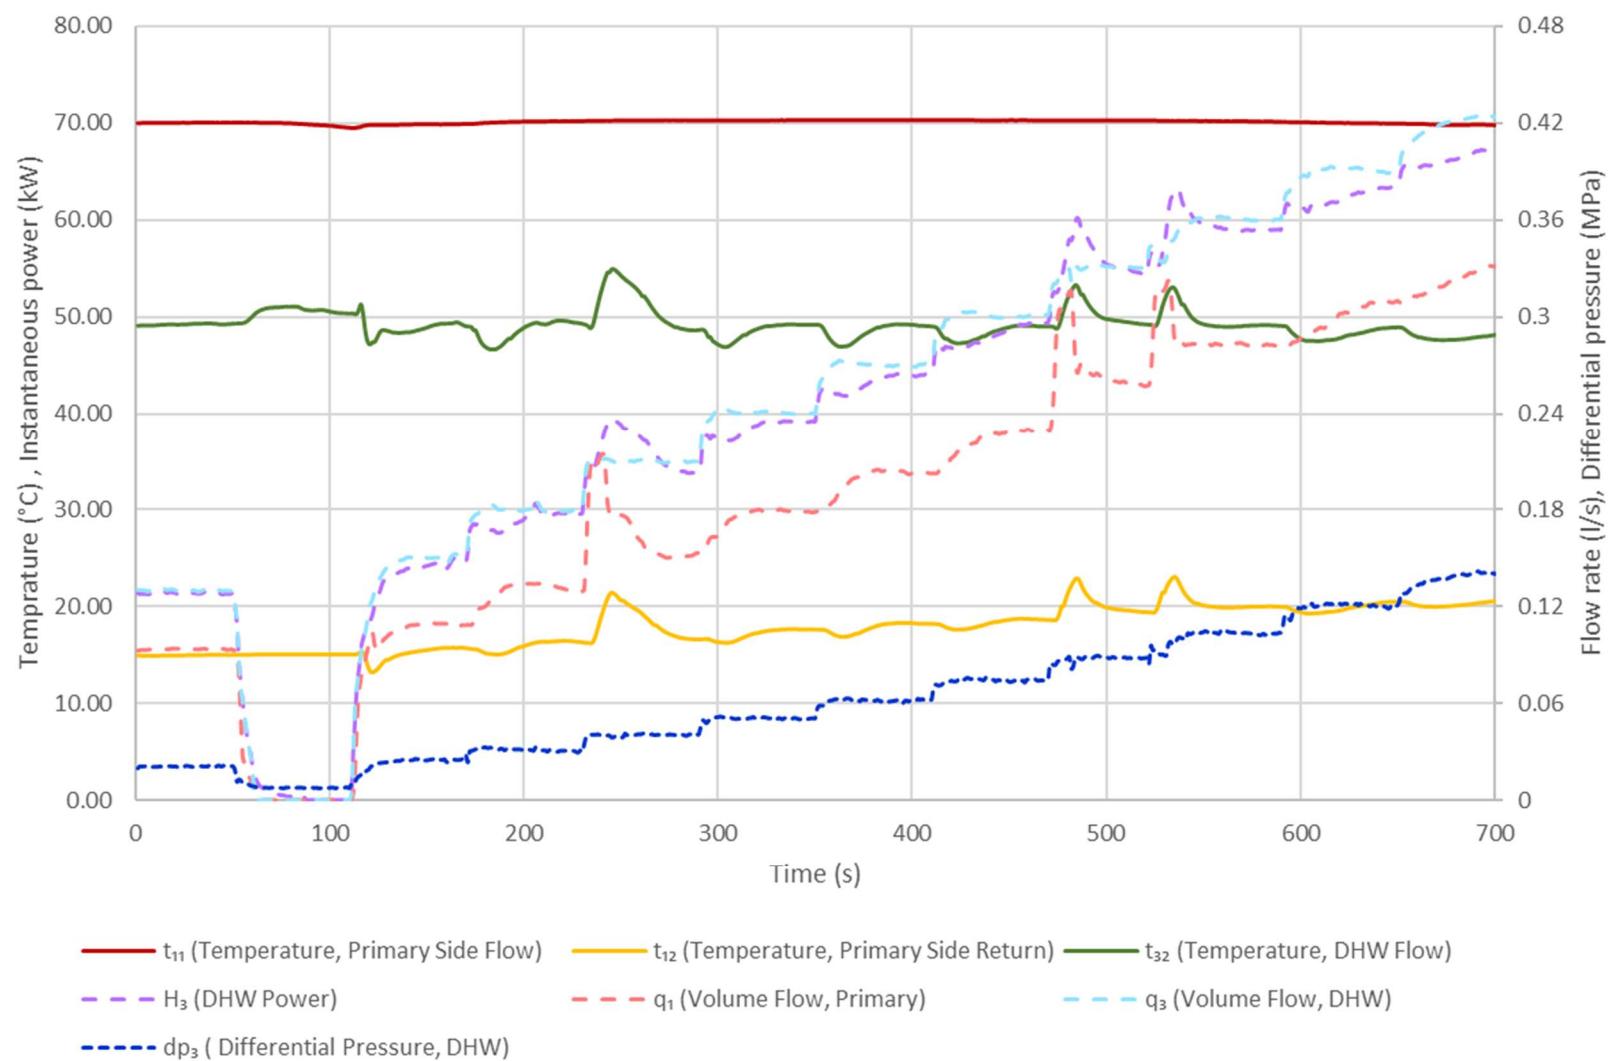


Figure 11 - Test 13a Key Metrics

8.8 Test 21a Information

- 8.8.1 Objective: To establish HIU performance during periods of no load, when operating in Keep Warm mode.

8.9 Test 21a Results

- 8.9.1 The test Keep Warm operation, HIU Internal Parameter Setup & Operation can be seen in Table 25.
- 8.9.2 The Keep Warm operation is valid (based on Test 22a response time criteria).
- 8.9.3 The Keep Warm undergoes cycling (i.e. t_{11} varies by more than ± 3 °C during the final 3 hours of the test).
- 8.9.4 Performance criteria results can be seen in Table 27, Test result data can be seen in Table 26 and key metrics can be found in Figure 12. Best practice criteria can be found in table 28.

Table 25 - Module 7, Test 21a, HIU Internal Parameter Setup & Operation

Module 7 - Test 21a – HIU Internal Parameter Setup & Operation	
Parameter	Setting / Operation Notes
Keep warm setting	-10°C

Table 26 - Module 7, Test 21a Results

Module 7 - Test 21a Results		
Parameter	Symbol	Result
Mean average volume flow, primary side	q_1 (l/s)	0.0008
Mean average of primary side power recorded during test	H_1 (kW)	0.037
Mean average electrical energy use	$W_{electrical}$ (W)	3.0
Mean average thermal energy use	$W_{thermal}$ (W)	36.7
Overall energy loss per day	(kWh)	0.95
Overall keep warm volume weighted avg. return temp	VWART (°C)	33

Table 27 - Module 7, Test 21 Performance Criteria

Module 7 - Test 21 Performance Criteria	
Performance Criteria, Fail if:	PASS/FAIL
Fail if VWART is above 44.0°C (to one decimal place)	Pass
Fail if primary return temperature (t_{12}) exceeds 55.0°C (to one decimal place) at any point, as this poses a scaling risk	Pass
Fail if the primary supply temperature to the HIU (t_{11}) drops to below 39°C	Pass
Fail if the HIU overall energy losses are greater than 1.0 kWh/day (to three decimal places)	Pass
Fail if the Test 22a DHW temperature response time test fails (i.e. the HIU Keep Warm operation is not a valid Keep Warm)	Pass

Table 28 - Module 7 - Best Practice

Module 7 – Test 21 – Best Practice Criteria	
Best Practice Criteria if:	Best Practice
Best practice if VWART is below 38°C (to one decimal place)	Achieved
Best practice if HIU overall energy losses are less than 0.7 kWh/day (to three decimal places)	Not Achieved

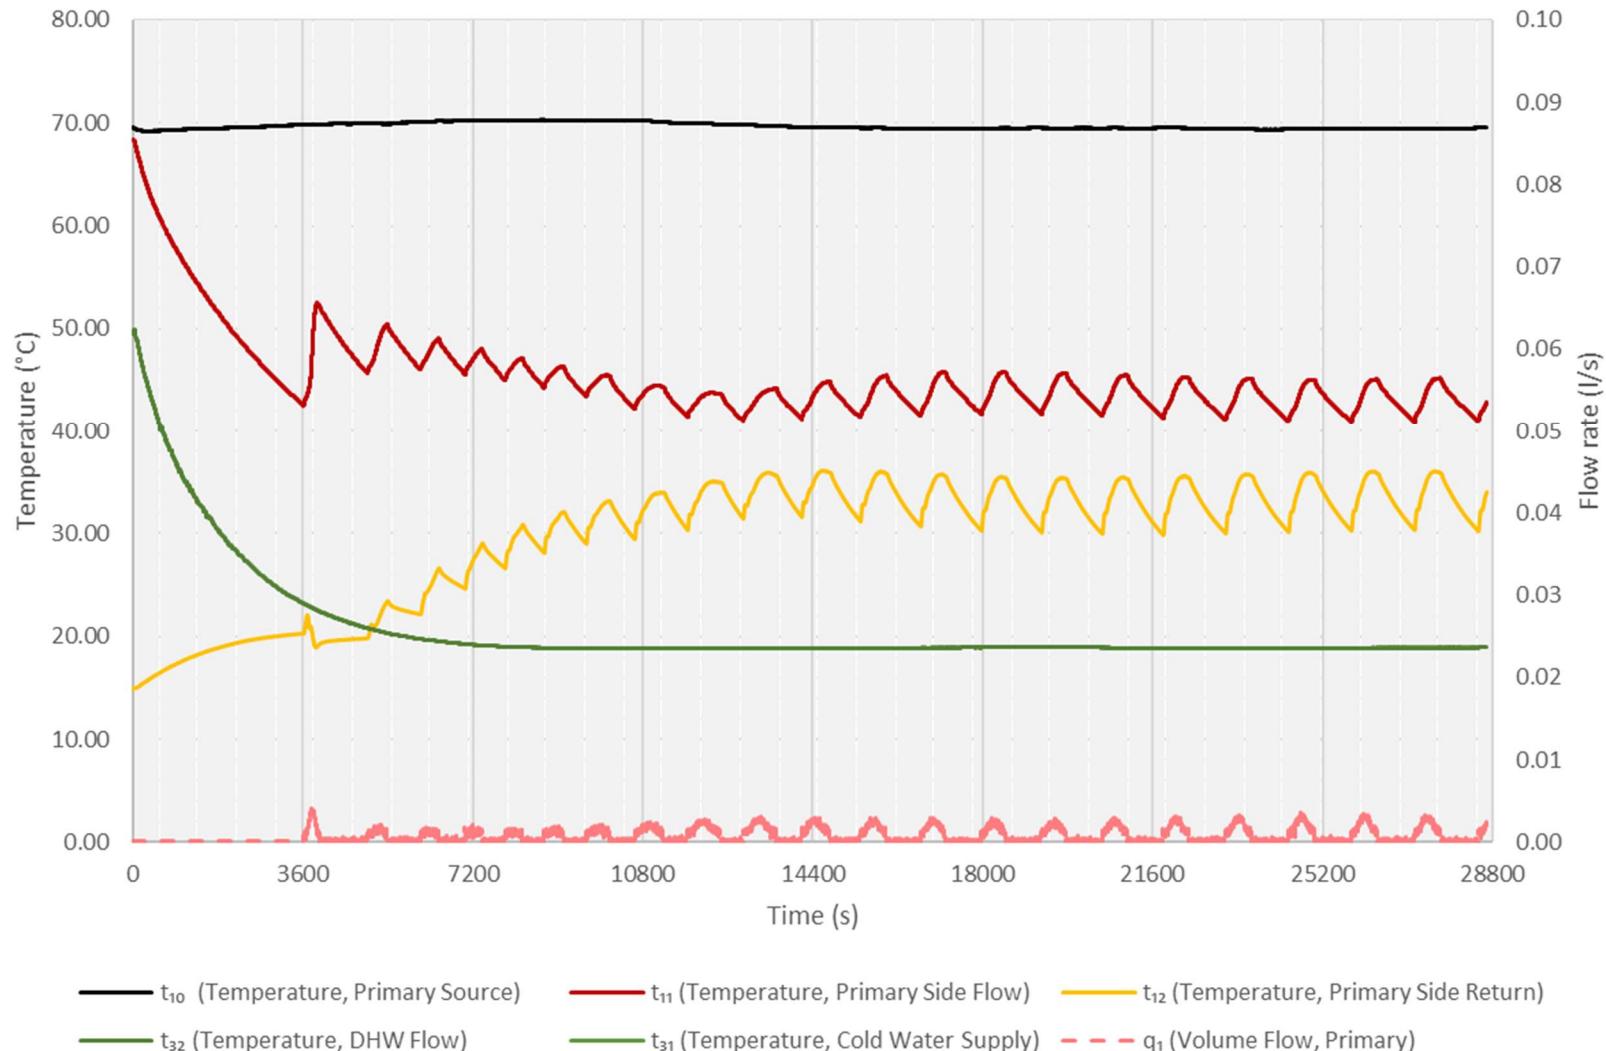


Figure 12 - Test 21a Key Metrics

8.10 Test 22a Information

- 8.10.1 Objective: To investigate DHW delivery time after a period of at least 8 hours Keep Warm only operation. This tests if the HIU can supply domestic hot water within an acceptable time of turning on the tap, which is a basic comfort requirement.

8.11 Test 22a Results

- 8.11.1 The Keep Warm operation is valid (based on response time criteria shown in Test 22 performance criteria).
- 8.11.2 Performance criteria results can be seen in Table 30, Test result data can be seen in Table 29 and key metrics can be found in Figure 13. Best practice criteria can be found in table 31.

Table 29 - Module 7, Test 22a Results

Module 7 - Test 22a Results		
Parameter	Symbol	Result
Time taken for t_{32} to reach 45.0°C and not subsequently drop below 42.0°C	(s)	15
Number of consecutive seconds where $t_{32} > 55^\circ\text{C}$	(s)	0
Mean average volume flow, primary side	q_1 (l/s)	0.118

Table 30 - Module 7, Test 22 Performance Criteria

Module 7 - Test 22 Performance Criteria	
Performance Criteria, Fail if:	PASS/FAIL
Fail if the DHW response time takes more than 15 seconds to reach 45.0°C (to one decimal place) at t_{32} while not dropping below 42.0°C (to one decimal place) thereafter	Pass
Fail if DHW temperature (t_{32}) exceeds 60.0°C (to one decimal place) for more than 1 second, as this poses a scalding risk	Pass
Fail if primary return temperature (t_{12}) exceeds 55.0°C (to one decimal place) at any point, as this poses a scaling risk	Pass

Table 31 - Module 7 - Best Practice

Module 7 – Test 22 – Best Practice Criteria	
Best Practice Criteria if:	Best Practice
Best practice if DHW response time at t_{32} is less than 10 seconds	Not Achieved

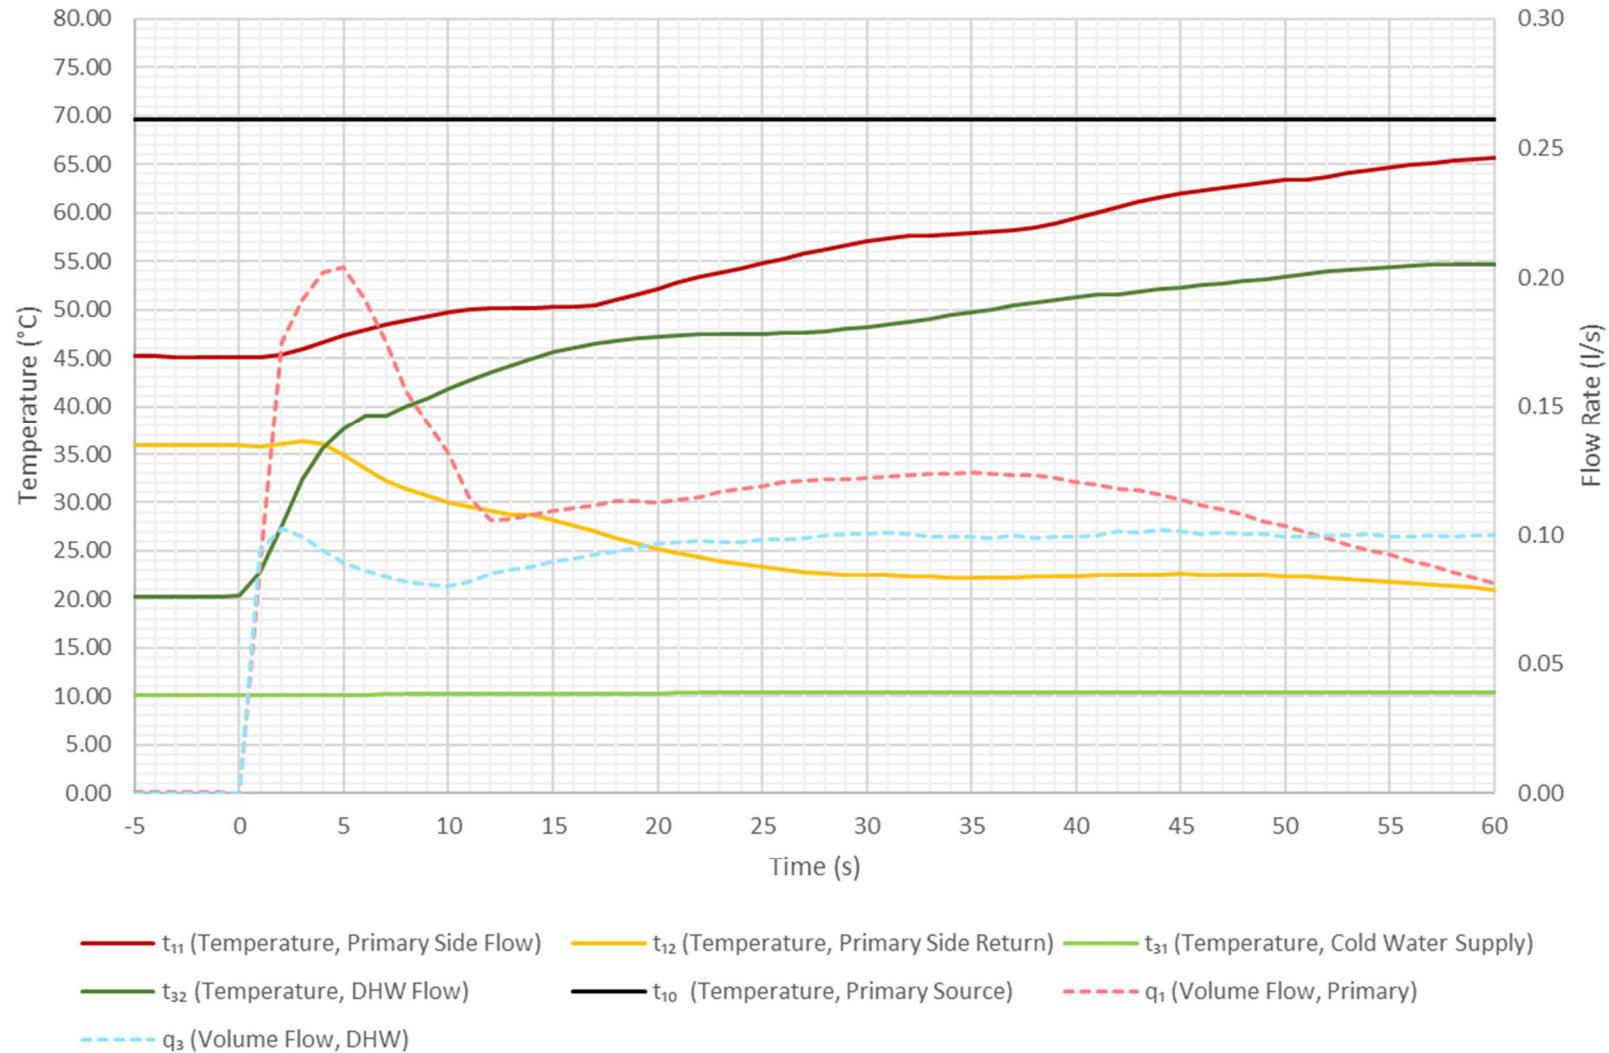


Figure 13 - Test 22a Key Metrics

9 TEST MODULE 8 – DHW, LOW TEMPERATURE, DH55-KWARM

9.1 Test Module 8 Information

- 9.1.1 Objective: To explore the performance of the HIU under changing loads, as would be the case in practical operation. Key performance criteria are speed and consistency of DHW delivery to the customer; DHW staying at a safe temperature at all times and the volume weighted average return temperature when supplying space heating or DHW.
- 9.1.2 The following set of tests are from test module 8 – Domestic Hot Water, Low Temperature, Keep Warm HOT WATER MODULE 8-DH55-KWarm.

Table 32 - Module 8 Tests

Module 8 Tests	
11b	DH/55C, DHW only, 50°C DHW, variable dP
12b	DH/55C, DHW Low Flow, 50°C DHW, 50kPa
12d	DH/55C, DHW Low Flow, 50°C DHW, 200kPa
13b	DH/55C, DHW Load Test, 50°C DHW
21b	DH/55C, DHW Keep Warm, 50°C DHW
22b	DH/55C, DHW Keep Warm Response Time, 50°C DHW

9.2 Test 11b Information

- 9.2.1 Objective: To investigate the performance of the HIU when delivering DHW, at a range of flow rates and differential pressures, given a 55°C primary flow temperature. The test investigates HIU operation in terms of DHW delivery and impacts on primary heat network return temperatures.

9.3 Test 11b Results

9.3.1 Performance criteria results can be seen in Table 34, Test result data can be seen in Table 33 and key metrics can be found in Figure 14. Best practice criteria can be found in table 35.

Table 33 - Module 8, Test 11b Results

Module 8 - Test 11b Results			
Parameter	Symbol	Result	
Maximum and minimum values of t_{32} when there is DHW flow	t_{32} (°C)	53.7	46.1
Number of consecutive seconds where $t_{32} > 55^\circ\text{C}$	(s)	0	
Overall DHW Volume Weighted Avg. Return Temp	VWART (°C)	23	

Table 34 - Module 8, Test 11b Performance Criteria

Module 8 - Test 11b Performance Criteria	
Performance Criteria, Fail if:	PASS/FAIL
Fail if DHW temperature (t_{32}) exceeds 60.0°C (to one decimal place) for more than 1 second, as this poses a scalding risk	Pass
Fail if primary return temperature (t_{12}) exceeds 55.0°C (to one decimal place) at any point, as this poses a scaling risk	Pass
Fail if the VWART is above 27°C (to one decimal place)	Pass
Fail if the average DHW temperature (t_{32}) is not 50.0°C $\pm 1^\circ\text{C}$ (to one decimal place) for the final 150 seconds of each of the 180 second DHW flow periods	Pass
Fail if the DHW temperature (t_{32}) is not being maintained at 50.0°C $\pm 3^\circ\text{C}$ (to one decimal place) for >150 seconds of each of the DHW flow periods	Pass
Fail if the DHW temperature (t_{32}) drops below 45.0°C (to one decimal place) for more than 5 consecutive seconds, as this would impact resident comfort	Pass

Table 35 - Module 8 - Test 11 Best Practice

Module 8 – Test 11 – Best Practice Criteria	
Best Practice Criteria if:	Best Practice
Best practice if the VWART is less than 20°C (to one decimal place)	Not Achieved
Best practice if the DHW temperature (t_{32}) is being maintained at 50.0°C $\pm 2^\circ\text{C}$ throughout periods of DHW flow	Not Achieved
Best practice if the DHW temperature (t_{32}) doesn't drop below 45.0°C (to one decimal place) for more than 2 consecutive seconds	Achieved

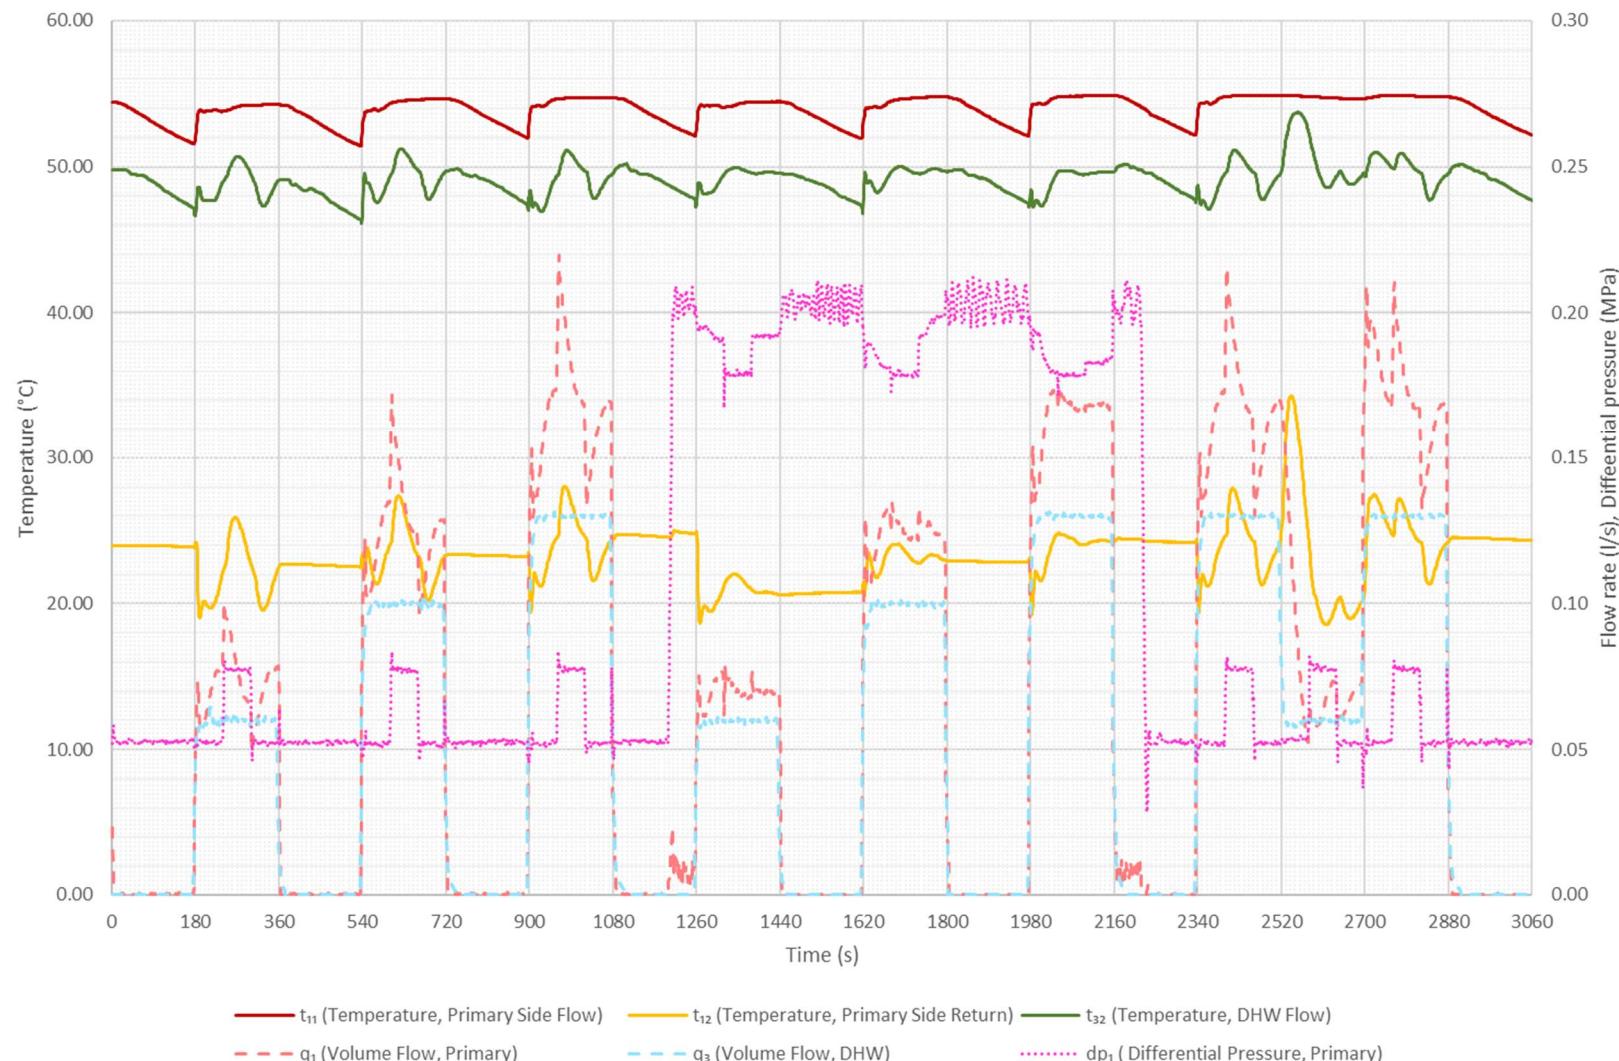


Figure 14 - Test 11b Key Metrics

9.4 Test 12b / 12d Information

- 9.4.1 Objective: To investigate the stability of DHW temperature at low flow rates. During operation, domestic hot water is sometimes drawn off at extremely low flow rates. Test 12 investigates the ability of the system to meet this condition by measuring the temperature at test point t_{32} at a flow rate of 0.02 l/s.

9.5 Test 12b / 12d Results

- 9.5.1 The HIU was able to deliver DHW at low flow rate above 45.0°C at the end of the 180 second period of low flow DHW.
- 9.5.2 The HIU was able to deliver stable DHW flow temperature (at t_{32}), defined as ability to maintain $50.0 \pm 3.0^\circ\text{C}$ (1 decimal place) during the last 60 seconds of the test.
- 9.5.3 Performance criteria results can be seen in Table 37, Test result data can be seen in Table 36 and key metrics can be found in Figure 15 and Figure 16. Best practice criteria can be found in table 38.

Table 36 - Module 8, Test 12 Results


Module 8 - Test 12 Results					
Parameter	Symbol	12b Result		12d Result	
Maximum and minimum values of t_{32} when there is low DHW flow	t_{32} (°C)	50.2	49.4	50.1	49.0
Number of consecutive seconds where $t_{32} > 55^\circ\text{C}$	(s)	0		0	

Table 37 - Module 8, Test 12 Performance Criteria

Module 8 - Test 12 Performance Criteria	
Performance Criteria, Fail if:	PASS/FAIL
Fail if DHW temperature (t_{32}) exceeds 60.0°C (to one decimal place) for more than 1 second, as this poses a scalding risk	Pass
Fail if primary return temperature (t_{12}) exceeds 55.0°C (to one decimal place) at any point, as this poses a scaling risk	Pass
Fail if DHW temperature (t_{32}) is not maintained at $50.0^\circ\text{C} \pm 3^\circ\text{C}$ (to one decimal place) for more than 60 seconds	Pass

Table 38 - Module 8 - Test 12 Best Practice

Module 8 – Test 12 – Best Practice Criteria	
Best Practice Criteria if:	Best Practice
Best practice if DHW temperature (t_{32}) is maintained at $50^\circ\text{C} \pm 2^\circ\text{C}$ (to one decimal place) throughout the test for both test 12b and 12d	Achieved

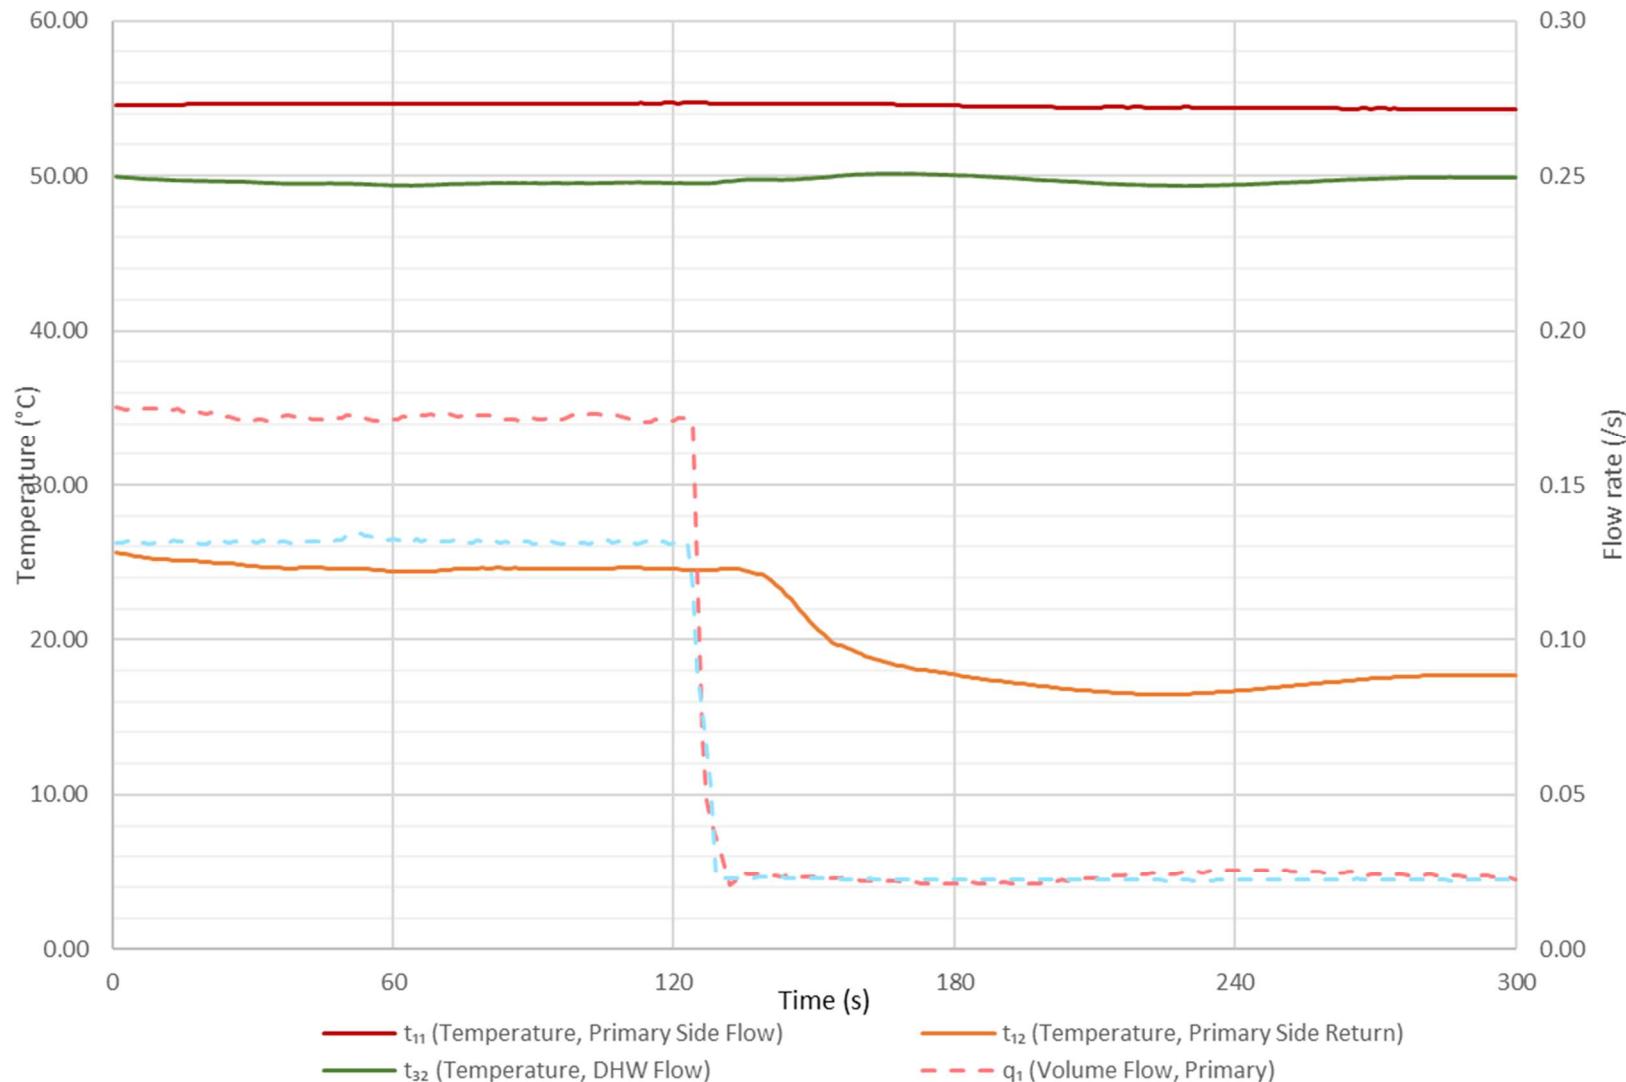

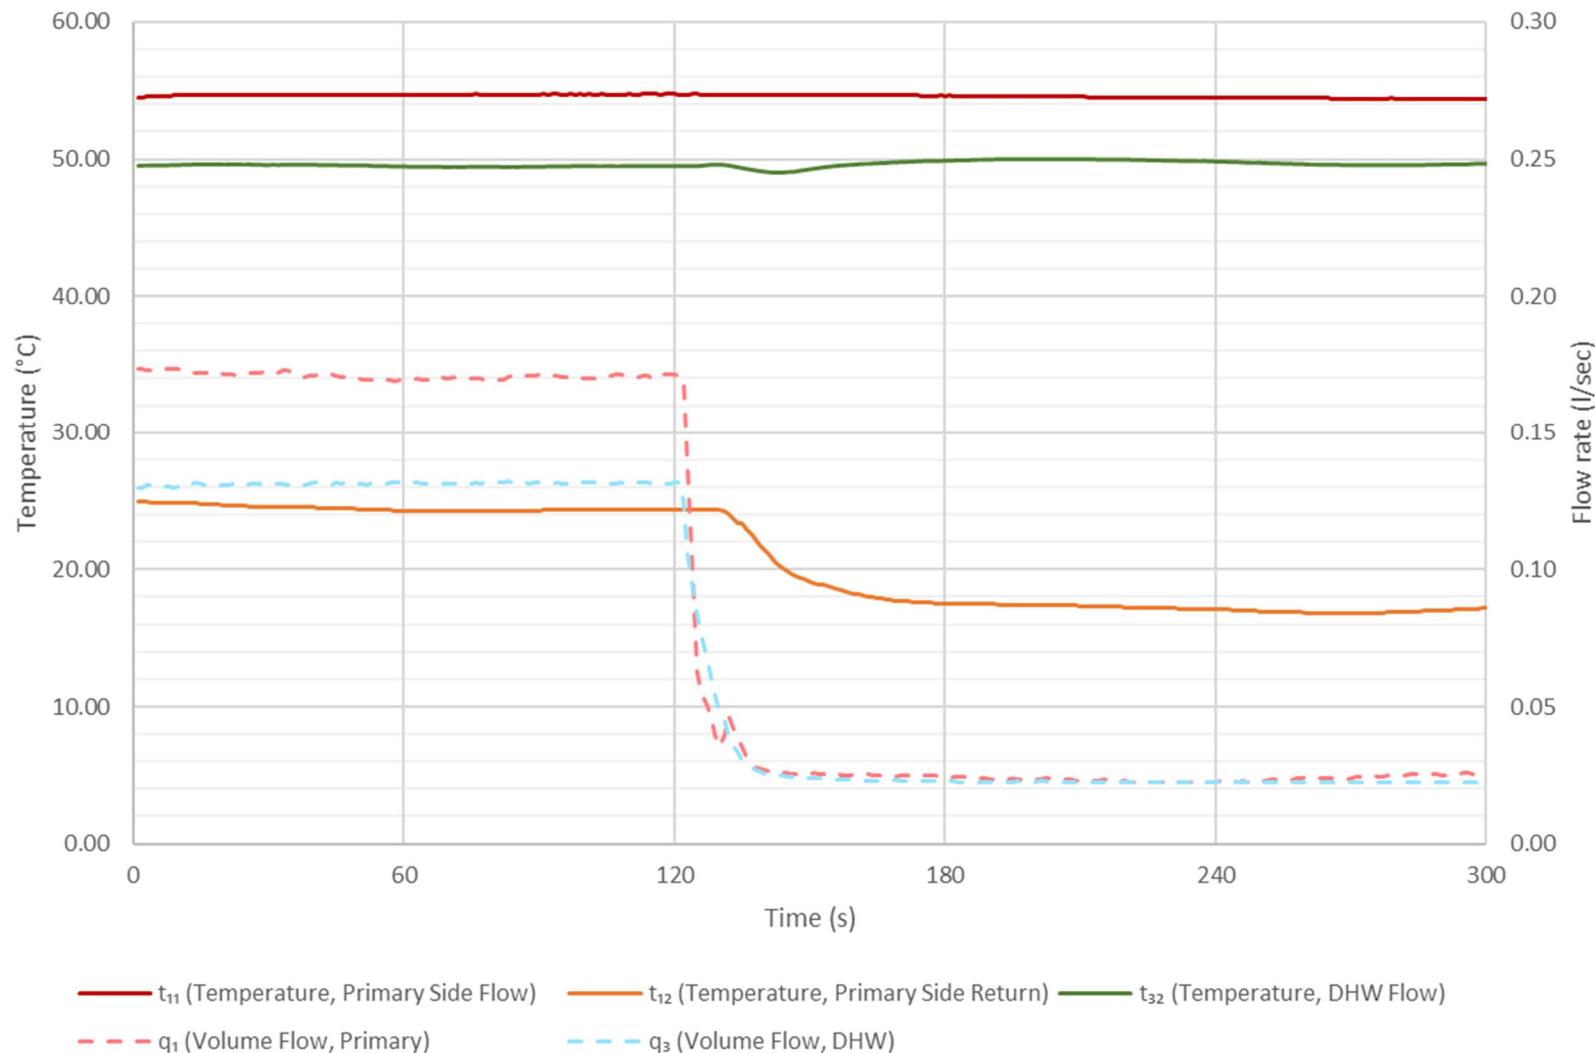


Figure 16 - Test 12d Key Metrics

9.6 Test 13b Information

- 9.6.1 Objective: To measure the maximum heat output (kW) and flow (l/sec) DHW output that can be delivered from the HIU. The HIU shall be set to deliver 50°C and the maximum DHW power output shall be measured with a flow step change and the peak value recorded when the DHW flow temperature is above 45°C.

9.7 Test 13b Results

- 9.7.1 The maximum DHW heat output was recorded as 44.98 kW, with a measured flow rate of 0.30 l/s, when producing minimum DHW at 45°C or above (45.8 °C).
- 9.7.2 The recorded DHW line pressure drop across the HIU was 75 kPa.
- 9.7.3 The number of consecutive seconds where $t_{32} > 55^\circ\text{C}$ was 0 seconds.
- 9.7.4 Performance criteria results can be seen in Table 39, Test result data can be seen in Table 40, key metrics can be found in Figure 17.

Table 39 - Module 8, Test 13 Performance Criteria

Module 8 - Test 13 Performance Criteria	
Performance Criteria, Fail if:	PASS / FAIL
Fail if DHW (at t_{32}) is less than $50^\circ\text{C} \pm 1.0^\circ\text{C}$ (to one decimal place) at 0.13 l/s flow rate, as the HIU must be able to produce DHW to the target temperature at a moderate load	Pass
Fail if DHW temperature (t_{32}) exceeds 60.0°C (to one decimal place) for more than 1 second, as this poses a scalding risk	Pass
Fail if primary return temperature (t_{12}) exceeds 55.0°C (to one decimal place) at any point, as this poses a scaling risk	Pass

Table 40 - Module 8, Test 13b Results

Module 8 - Test 13b Results – Mean Average of Last 10 Seconds											
Parameter	Symbol	0.15 l/s (25kW)	0.18 l/s (30kW)	0.21 l/s (35kW)	0.24 l/s (40kW)	0.27 l/s (45kW)	0.30 l/s (50kW)	0.33 l/s (55kW)	0.36 l/s (60kW)	0.39 l/s (65kW)	0.42 l/s (70kW)
Temperature, primary side flow connection	t_{11} (°C)	54.6	54.7	54.8	54.8	54.8	54.7	54.7	-	-	-
Temperature, primary side return connection	t_{12} (°C)	24.1	26.5	26.8	26.3	25.7	23.9	22.5	-	-	-
Volume flow, primary side	q_1 (l/s)	0.199	0.251	0.295	0.330	0.352	0.351	0.350	-	-	-
Arithmetic mean of primary side power recorded during test	H_1 (kW)	25.48	29.68	34.49	39.32	42.76	45.20	47.23	-	-	-
Temperature, cold water supply	t_{31} (°C)	10.4	10.4	10.4	9.9	10.0	10.0	10.1	-	-	-
Temperature, domestic hot water flow from HIU	t_{32} (°C)	48.5	49.6	49.2	48.4	47.5	45.8	44.1	-	-	-
Volume flow, domestic hot water	q_3 (l/s)	0.150	0.180	0.211	0.240	0.270	0.300	0.330	-	-	-
Differential pressure, domestic hot water across HIU	dP_3 (kPa)	25	31	41	51	62	75	89	-	-	-
Arithmetic mean of DHW power recorded during test	H_3 (kW)	23.98	29.56	34.32	38.70	42.48	44.98	47.13	-	-	-

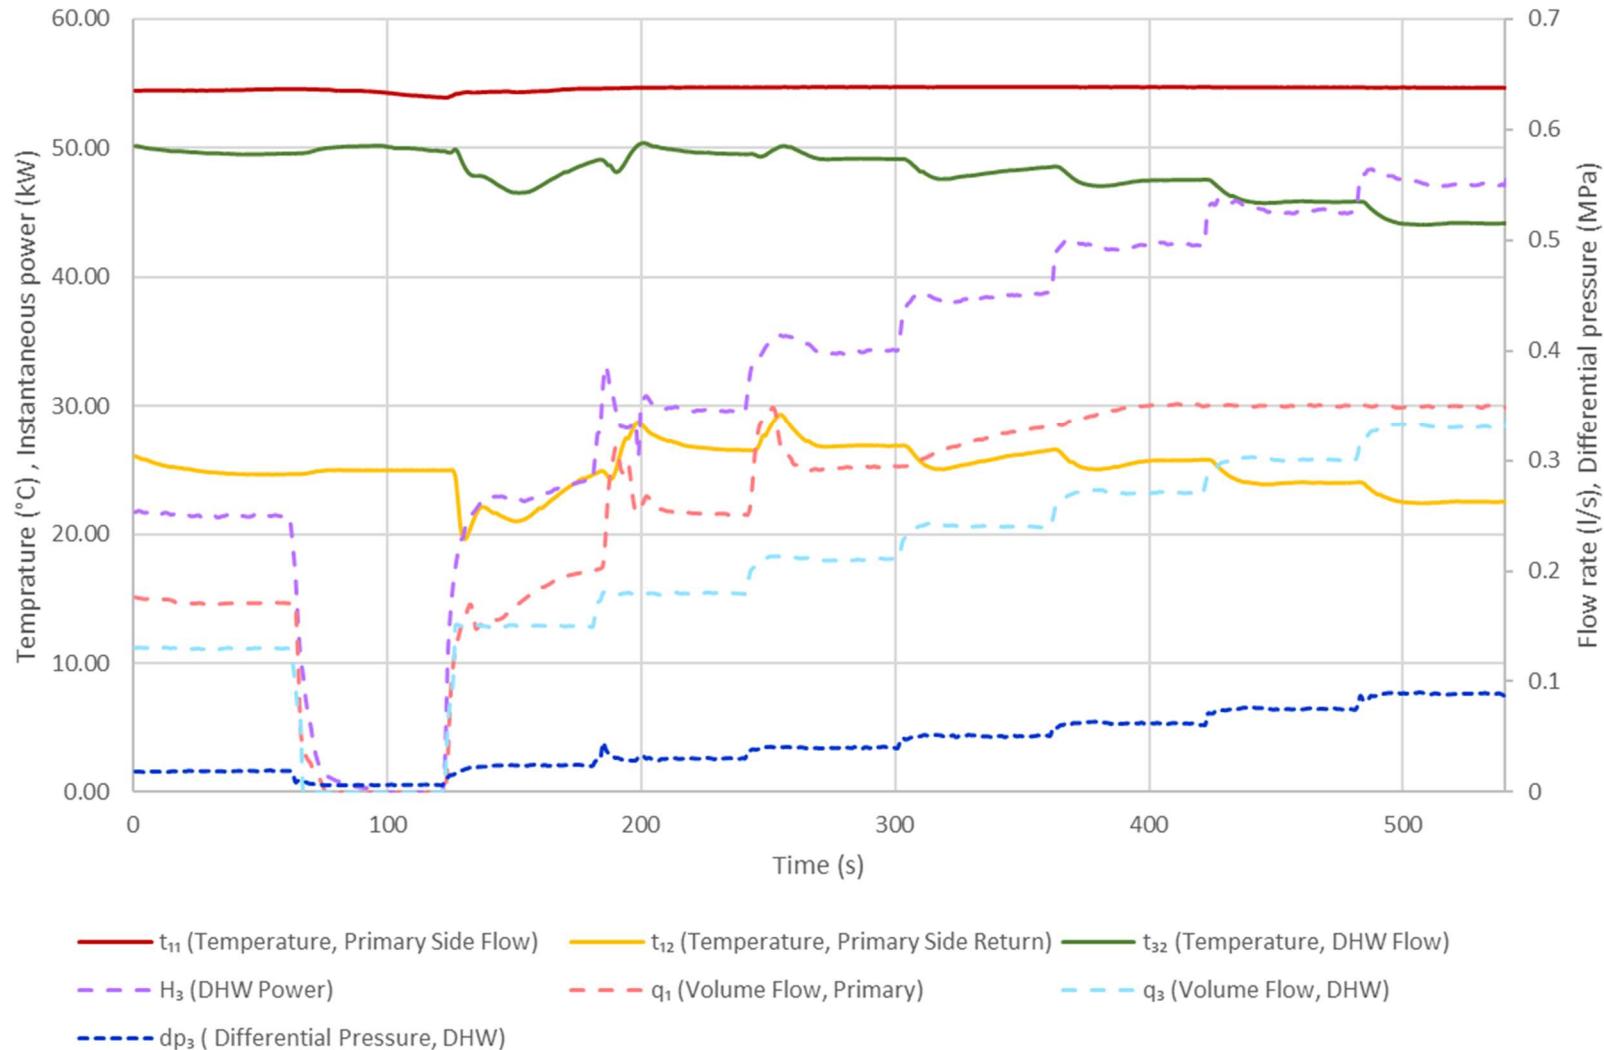


Figure 17 - Test 13b Key Metrics

9.8 Test 21b Information

- 9.8.1 Objective: To establish HIU performance during periods of no load, when operating in Keep Warm mode.

9.9 Test 21b Results

- 9.9.1 The test Keep Warm operation, HIU Internal Parameter Setup & Operation can be seen in Table 41.
- 9.9.2 The Keep Warm operation is valid (based on Test 22b response time criteria).
- 9.9.3 The Keep Warm does not undergo cycling (i.e. t_{11} varies by more than ± 3 °C during the final 3 hours of the test).
- 9.9.4 Performance criteria results can be seen in Table 43, Test result data can be seen in Table 42 and key metrics can be found in Figure 18. Best practice criteria can be found in table 44.

Table 41 - Module 8, Test 21b, HIU Internal Parameter Setup & Operation

Module 8 - Test 21b – HIU Internal Parameter Setup & Operation	
Parameter	Setting / Operation Notes
Keep warm setting	-10°C

Table 42 - Module 8, Test 21b Results

Module 8 - Test 21b Results		
Parameter	Symbol	Result
Mean average volume flow, primary side	q_1 (l/s)	0.0014
Mean average of primary side power recorded during test	H_1 (kW)	0.04
Mean average electrical energy use	$W_{electrical}$ (W)	3.1
Mean average thermal energy use	$W_{thermal}$ (W)	37.6
Overall energy loss per day	(kWh)	0.975
Overall keep warm volume weighted avg. return temp	VWART (°C)	37

Table 43 - Module 8, Test 21 Performance Criteria

Module 8 - Test 21 Performance Criteria	
Performance Criteria, Fail if:	PASS/FAIL
Fail if VWART is above 48°C (to one decimal place)	Pass
Fail if primary return temperature (t_{12}) exceeds 55.0°C (to one decimal place) at any point, as this poses a scaling risk	Pass
Fail if the primary supply temperature to the HIU (t_{11}) drops to below 39°C	Pass*
Fail if the HIU overall energy losses are greater than 1.0 kWh/day (to three decimal places)	Pass
Fail if the Test 22b DHW temperature response time test fails (i.e. the HIU Keep Warm operation is not a valid Keep Warm)	Pass

Table 44 - Module 8 - Test 21 Best Practice

Module 8 – Test 21 – Best Practice Criteria	
Best Practice Criteria if:	Best Practice
Best practice if VWART is below 44°C (to one decimal place)	Achieved
Best practice if HIU overall energy losses are less than 0.7 kWh/day (to three decimal places)	Not Achieved

* Whilst t_{11} decreases below 39°C in the initial period of the test, this has been reviewed by the BESA HIU Technical Committee and has been determined that this behaviour is part of the normal operation of the HIU keep warm as the cyclical profile reaches equilibrium.

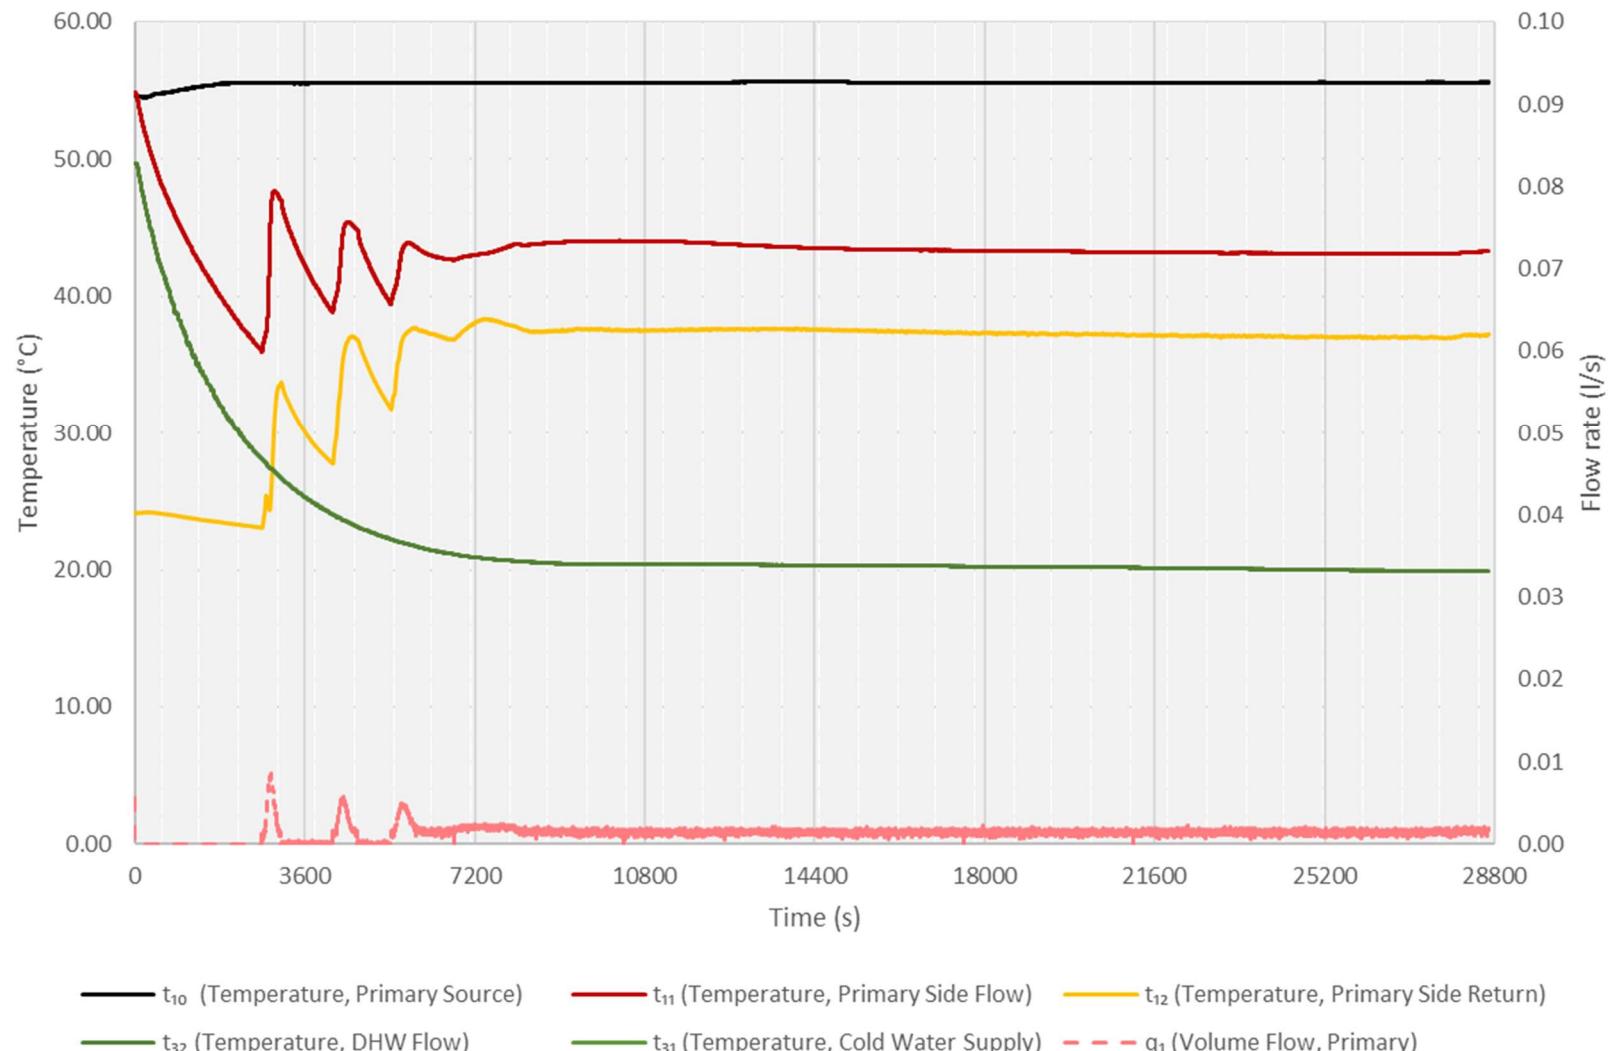


Figure 18 - Test 21b Key Metrics

9.10 Test 22b Information

- 9.10.1 Objective: To investigate DHW delivery time after a period of at least 8 hours Keep Warm only operation. This tests if the HIU can supply domestic hot water within an acceptable time of turning on the tap, which is a basic comfort requirement.

9.11 Test 22b Results

- 9.11.1 The keep warm operation is valid (based on response time criteria shown in Test 22 performance criteria).
- 9.11.2 Performance criteria results can be seen in Table 46, Test result data can be seen in Table 45 and key metrics can be found in Figure 19. Best practice criteria can be found in table 47.

Table 45 - Module 8, Test 22b Results

Module 8 - Test 22b Results		
Parameter	Symbol	Result
Time taken for t_{32} to reach 45.0°C and not subsequently drop below 42.0°C	(s)	15
Number of consecutive seconds where $t_{32} > 55^\circ\text{C}$	(s)	0
Mean average volume flow, primary side	q_1 (l/s)	0.163

Table 46 - Module 8, Test 22 Performance Criteria

Module 8 - Test 22 Performance Criteria	
Performance Criteria, Fail if:	PASS/FAIL
Fail if the DHW response time takes more than 15 seconds to reach 45.0°C (to one decimal place) at t_{32} while not dropping below 42.0°C (to one decimal place) thereafter	Pass
Fail if DHW temperature (t_{32}) exceeds 60.0°C (to one decimal place) for more than 1 second, as this poses a scalding risk	Pass
Fail if primary return temperature (t_{12}) exceeds 55.0°C (to one decimal place) at any point, as this poses a scaling risk	Pass

Table 47 - Module 8 - Test 22 Best Practice

Module 8 – Test 21 – Best Practice Criteria	
Best Practice Criteria if:	Best Practice
Best practice if DHW response time at t_{32} is less than 10 seconds	Not Achieved

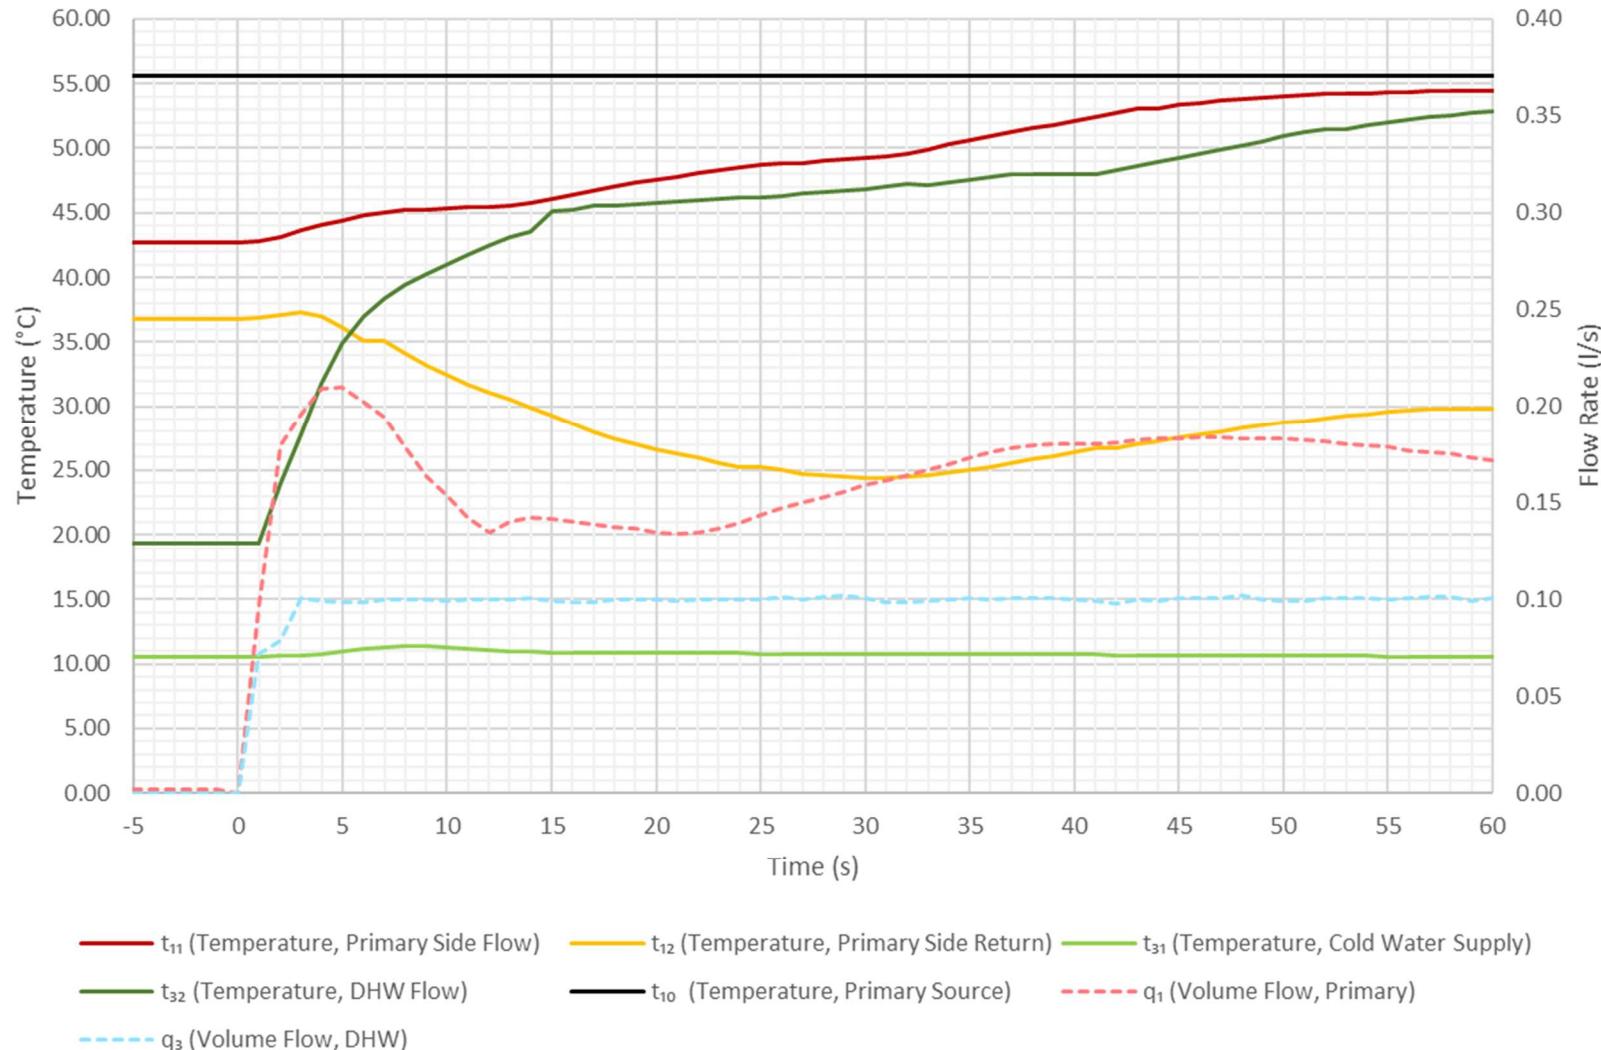


Figure 19 - Test 22b Key Metrics

10 CONCLUSIONS

All conclusions, opinions and interpretations indicated in this report are outside the scope of Enertek's UKAS accreditation.

- 10.1.1 The HIU has passed the requirements of the BESA UK HIU BESA Technical Standard for UK HIU Test Regime, V3-Rev001 September 2023.

11 EQUIPMENT AND INSTRUMENT LIST

EQUIPMENT NAME	ID NUMBER	CERTIFICATE NUMBER	MEASUREMENT UNCERTAINTY K=2	CALIBRATION DATE	CALIBRATION DUE
Cold Water Supply Probe	PRT 5002	CAL 000292	0.077 °C	27/04/2023	04/2024
DHW Outlet Probe	PRT 5003	CAL 000292	0.077 °C	27/04/2023	04/2024
Primary Inlet Probe	PRT 5004	CAL 000292	0.077 °C	27/04/2023	04/2024
Primary Return Probe	PRT 5005	CAL 000292	0.077 °C	27/04/2023	04/2024
SH Flow Probe	PRT 5006	CAL 000292	0.077 °C	27/04/2023	04/2024
SH Return Probe	PRT 5007	CAL 000292	0.077 °C	27/04/2023	04/2024
Primary Flow T¹⁰	PRT 5008	CAL 000292	0.077 °C	27/04/2023	04/2024
Flow Meter	FM 601	3953070009	0.006 l/sec	07/11/2022	04/2024
Flow Meter	FM 602	3953070011	0.0025 l/sec	09/11/2022	04/2024
Flow Meter	FM 603	3953070012	0.0046 l/sec	13/11/2022	04/2024
Flow Meter	FM 605	3953070010	0.001 l/sec	14/11/2022	04/2024
Pressure Transducer	PT 083	395307005	6.87 kPa	31/10/2022	04/2024
Pressure Transducer	PT 084	3953070003	8.33 kPa	18/10/2022	04/2024
Pressure Transducer	PT 085	3953070002	7.46 kPa	18/10/2022	04/2024
Pressure Transducer	PT 086	3953070004	7.23 kPa	18/10/2022	04/2024
Pressure Transducer	PT 087	3953070006	7.10 kPa	19/10/2022	04/2024
Pressure Transducer	PT 088	3953070007	6.54 kPa	19/10/2022	04/2024
Power Meter	PM 1022	3953070008	0.16 W	11/01/2023	01/2024
Pipe	PIPE 001	-	-	27/04/2024	04/2024

The reported expanded uncertainty is based on a standard uncertainty by a coverage factor K = 2, providing a level of confidence of approximately 95 %. The uncertainty evaluation has been carried out in accordance with BS EN ISO/IEC 17025:2017 requirements.

12 APPENDIX A

12.1 VWART Calculations for Modules 1 & 7

	VWART (°C)	Volume (m ³)		VWART (°C)		
DHW	15	29.4				
Standby	33	20.6				
Space Heating	36	40.8				
DHW Draw Test Results			Post DHW Draw (60 seconds)			
	Power (W)	Primary Flow (m ³ /hr)	VWART (°C)	Primary Volume (m ³)		
Low	9443	0.2	14	0.58		
Medium	15756	0.2	15	0.07		
High	20640	0.3	16	0.06		
DHW Draw Volumes pa			Post DHW Draw Volumes pa			
kWh pa	Hours	Volume pa (m ³)	Events pa	Volume pa (m ³)		
729	77.2	11.8	10000	5.829		
297	18.85	4.7	660	0.047		
444	21.51	7.0	300	0.019		
Standby Test Results			Standby Volumes pa			
Primary Flow (m ³ /hr)	VWART (°C)	Hours	Volume pa (m ³)			
0.0027	33	7612	20.581			
Space Heating						
	Power (W)	Primary Flow (m ³ /hr)	VWART (°C)	kWh pa	Hours	Volume pa (m ³)
0.5kW	524	0.019	35	98	187	3.48
1kW	1109	0.032	36	787	710	22.82
4kW	4143	0.106	36	565	136	14.49

12.1.1 It should be noted that all VWART figures are to within ±2°C tolerance.

12.2 VWART Calculations for Modules 2 & 8

	VWART (°C)	Volume (m ³)		VWART (°C)	
DHW	22	44.5			
Standby	37	37.2			
Space Heating	36	76.0			
DHW Draw Test Results			Post DHW Draw (60 seconds)		
	Power (W)	Primary Flow (m ³ /hr)	VWART (°C)	Primary Volume (m ³)	
Low	9483	0.3	21	0.42	
Medium	16105	0.4	23	0.03	
High	21095	0.6	24	0.15	
DHW Draw Volumes pa			Post DHW Draw Volumes pa		
kWh pa	Hours	Volume pa (m ³)	Events pa	Volume pa (m ³)	
729	76.87	19.6	10000	4.188	
297	18.44	8.2	660	0.022	
444	21.05	12.4	300	0.046	
Standby Test Results			Standby Volumes pa		
Primary Flow (m ³ /hr)	VWART (°C)	Hours	Volume pa (m ³)		
0.005	36.7	7531	37.207		
Space Heating					
Power (W)	Primary Flow (m ³ /hr)	VWART (°C)	kWh pa	Hours	Volume pa (m ³)
0.5kW	531	0.029	35	98	185
1kW	971	0.053	36	787	811
4kW	4133	0.199	37	565	137

12.2.1 It should be noted that all VWART figures are to within ±2°C tolerance.

13 APPENDIX B

13.1 Appliance Documentation

13.1.1 The details of the appliance documentation are given in Table 48 below.

Table 48 - Appliance Documentation

#	Component:	Document Submitted (Y/N):	Manufacturer and type:
1	Space Heating Heat Exchanger	Y	AlfaLaval: CBH18-15A (Prim AH)
2	Domestic Hot Water Heat Exchanger	Y	AlfaLaval: CBH18-47 A (Prim AH)
3	Controller for Space Heating and Hot Water Heating	Y	Cetetherm/Nibe: Matrix (Display: RMU 739326) / (Control Center: CC1264)
4	Control Valve and Actuator for Space Heating	Y	ESBE: SLP120
5	Space Heating Strainer	Y	Cetetherm: ST1077
6	Control Valve and Actuator for Hot Water Heating	Y	ESBE: SP120
7	Temperature Sensors	Y	Shibaura: E3M-42D-C49 (WT5)
8	Domestic Hot Water Isolating Valve	-	-
9	Primary Side Strainer	Y	Cetetherm: ST1078
10	Drain Valves	-	-
11	Vent Valve	-	-
12	Circulation Pump	Y	Grundfos: UPM4 LIN 15-75-130
13	Heat Meter	-	-
14	Domestic Hot Water Flow Sensor	Y	Sika: VTY10k5
15	Pipes	Y	Cooper and Stainless steel pipes: Cetetherm
16	Connections	Y	Brass: Cetetherm
17	Joints	Y	Brass: Cetetherm
18	Gaskets	Y	Gasket Flexitallic SIGMA 511 3/4" 24X16X1.5
19	O Rings	Y	Scaligera: EPDM70 Black PX - M534
20	Pressure Sensor	Y	Honeywell: MIPAF1XX020BSAAX

21	Expansion Vessel	Y	Zilio Industries S.p.A.: ZIEGDOIZB31M7 (VRP220-8 H80 3/8"x18 90° DX)
22	Insulation	Y	Backframe: BEWI IN1000 SampolymerEtyleenPropylen 40g/L (Volyme: 9,3L) Side Cover+Front: Cabseal: 225-14 Cellular Polyethylene Foam 28kg/m3 Heat exchanger: Interrep: ASTM D 1056-07 (74-42 EPDM)
A1	Commissioning Guide	Y	
A2	Operation Guide	Y	
A3	Declaration of Conformity	Y	
A4	Full Parameter List	Y	
A5	Maximum Primary Static Operating Differential Pressure		600kPa
	Software Version	Y	RMU: V.1.1.1, ASB: V.13
	Model Name and Type Number	-	Model: Cetetherm Pioneer Typ Number: Pi1-H1-T1-GE1-E-H-O- 6W-3-E-E-1x130-UK Item number: 739490
	Serial Number	-	73949023352001
	Any Other Components Stated by Manufacturer	Y	Internal production test reports

13.2 Appliance Photographs



Figure 20 - HIU with outer case fitted

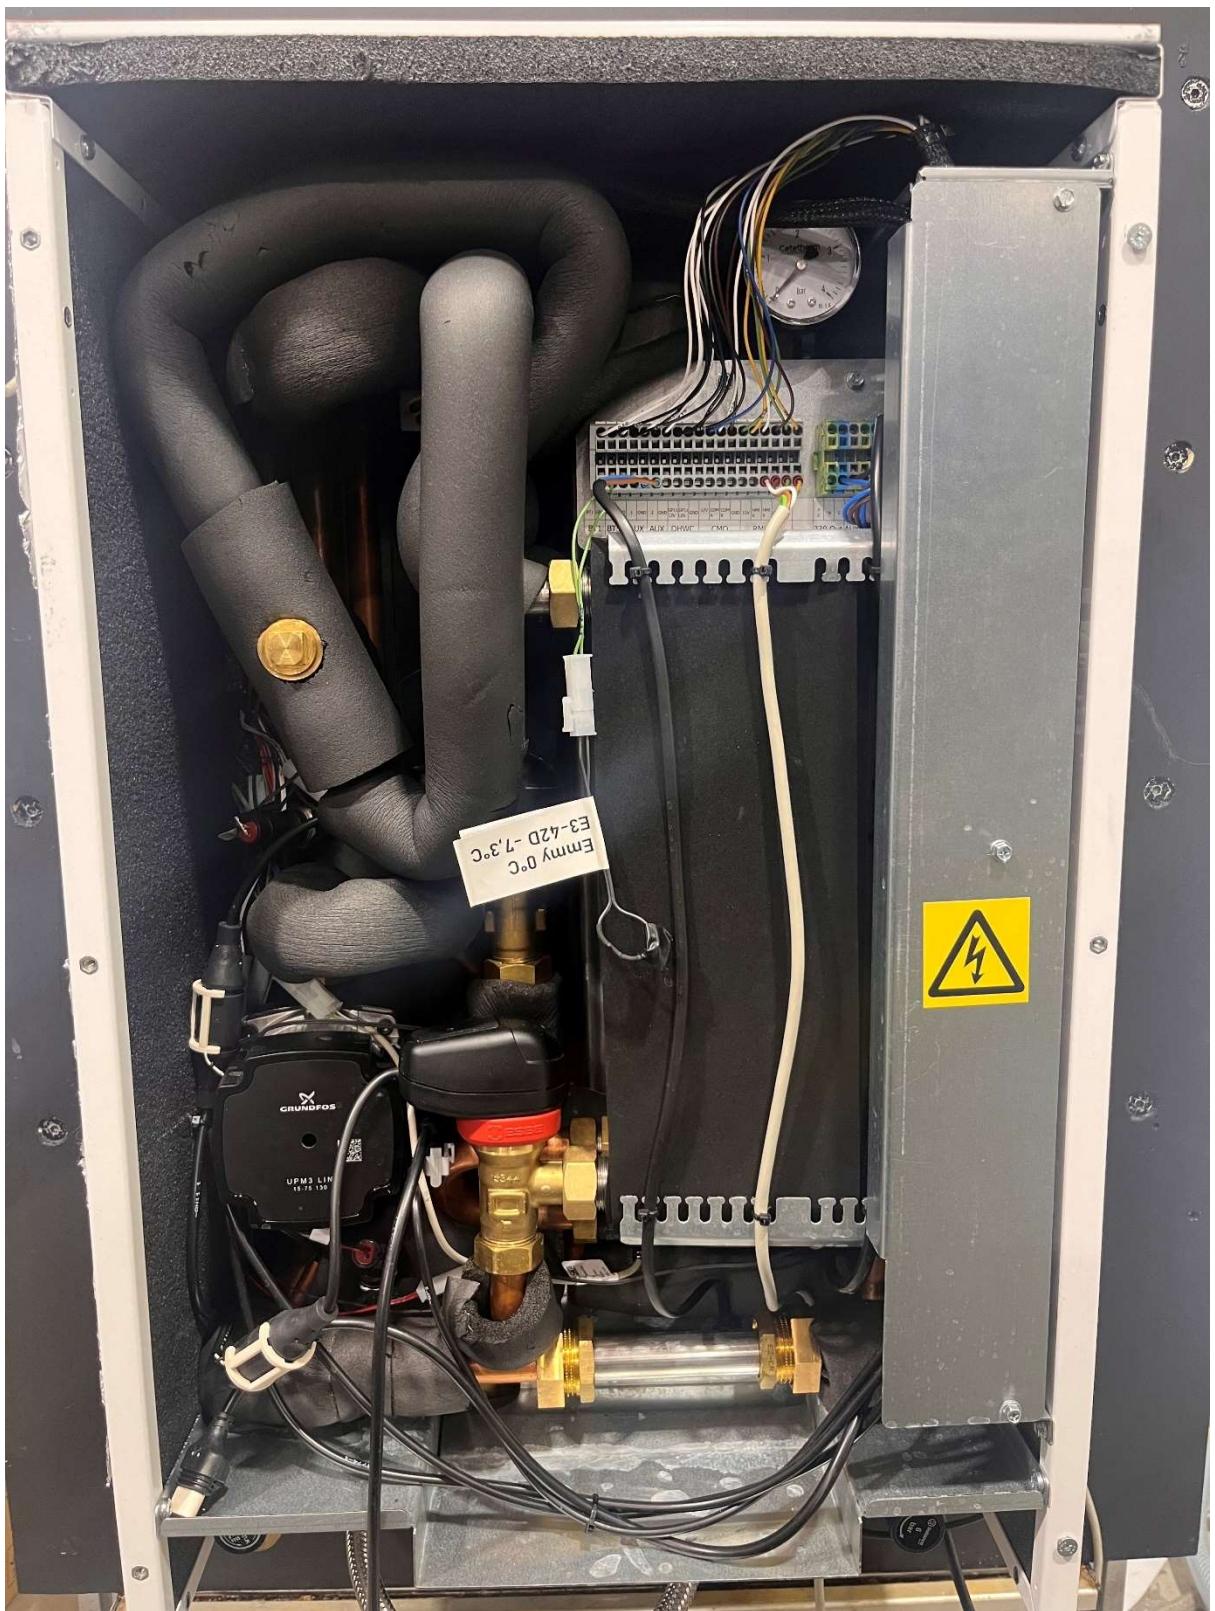


Figure 21 - HIU with outer case removed



Figure 22 - Data Label

14 APPENDIX C

14.1 Declaration of Conformity

Declaration of Conformity Cetetherm Pioneer

Försäkran om överensstämmelse
Declaration of Conformity
Déclaration de conformité
Konformitätserklärung
Conformiteitsverklaring
Vaatimustenmukaisuusvaakutus

PED 2014/68/EU art 4.3, LVD, EMC, RoHS



Tillverkare / Manufacturer / Fabricant / Hersteller / Fabrikant / Valmistaja
Cetetherm AB, Ronneby Sweden

- * Värmeväxlarenhet, Fjärrvärmecentral för värme och/eller varmvatten
- * Heat exchanger unit, District heating System, for heating and/or Domestic Hot Water
- * Échangeur thermique, système de chauffage urbain, pour le chauffage et l'eau chaude sanitaire
- * Fernwärme-Kompaktionen, für Heizung und/oder Trinkwarmwasser
- * Warmtewisselaarunit, stadsverwarmingsysteem, voor verwarmingswater en/of sanitair warm water
- * Lämmönjakokeskus, Kaukolämmitys, lämpimälle käyttövadelle ja lämmitykselle

Produkter/ Products/ Produits/ Produkte/ Producten/ Tuote
Pioneer

Ovanstående produkter ligger i artikel 4.3 enligt PED 2014/68/EU
Above mentioned products are in article 4.3 according to PED 2014/68/EU
Les produits susmentionnés figurent à l'article 4.3 conformément à la DESP 2014/68/EU
Vorstehend benannte Produkte fallen unter Artikel 4.3 der DGRL 2014/68/EU
Bovengenoemde producten zijn conform artikel 4.3 van Richtlijn 2014/68/EU (Richtlijn Drukapparatuur)
Tuotteet ovat valmistusluoktaan artikla 4.3 2014/68/EU mukaisia

Tillämpade direktiv/ Used directives/ Directives utilisées/ Angewandte Direktiv/ Gebruikte richtlijnen/
Käytetyt direktiivit

- PED 2014/68/EU
- LVD 2014/35/EU
- EMC 2014/30/EU
- RoHS 2011/65/EU

Tillämpade övriga standarder och specifikationer/ Used other standards and specifications/ Autres normes et spécifications utilisées/ Weitere angewandte Standards/ Andere gebruikte standaarden en specificaties
/ Käytetyt standardit

- Boverkets Byggregler BBR 25
- Varm och Hetvattenanvisningar 1993: VVA 93
- FVF F:101, F:103-7
- DK VA 3.22 / Gennemstrømningsvandvarmer
- Suomen kaukolämpö ry: K1/2020
- Suomen ympäristöministeriö: Määräyskokoelma D1

Konformitetsprocedur:	God teknisk praxis
Conformity Assessment procedure:	Sound Engineering practice
Procédure d'évaluation de conformité :	Règles de l'art
Konformitätsbewertungsverfahren:	Gute Ingenieurpraxis
Conformiteitsbeoordelingsprocedure:	Regels van goed vakmanschap
Vaatimustenmukaisuusarvion menettelytapa:	Hyvän konepajateknikan mukaisesti

Ronneby, 2024-01-22

Anders Söderström

Anders Söderström
Ansvarig för överensstämmelse/ Responsible for conformity/Responsable de la conformité/ Bevollmächtigter/
Verantwoordelijke voor conformiteit/ Vastuuhenkilö

DOC1629 2023-03-20

Figure 23 - Declaration of conformity

14.2 Water Regulation 4 Certificate



CERTIFICATE



Certificate number: 2402761 (1)

Issued 28/02/2024
Expires 28/02/2029**Kiwa Regulation 4 (KUKreg4) Certification**Evaluation Guideline – Kiwa UK – EG004 – Regulation 4(1)(a)
Model number(s) – see Appendix**Cetetherm AB.**

Kiwa Watertec declares that legitimate confidence exists in the products specified in this certificate and supplied by the above organisation be relied upon to comply with the Kiwa Evaluation Guideline referred above.

Which verifies the requirements of:

**Regulation 4(1)a of the Water Supply (Water Fittings) Regulations 1999 England & Wales: 2009
Northern Ireland and 2014 Byelaws Scotland.**

This certificate has been issued in accordance with the Kiwa regulations for product certification.

Signed on behalf of Kiwa Watertec

David Jay, Business Unit Manager – Authorised Signatory
Kiwa Watertec

Publication of this certificate is allowed.

Products are intended to be used in the UK only. For other countries, other (National) requirements will apply.

See <https://www.kiwa.com/gb/en/about-kiwa/water-products/> or the QR code below to ensure that the certificate is still valid.

Kiwa Watertec
(A Trading Division of Kiwa Ltd)
26A Rassau Industrial Estate
Ebbw Vale
Gwent
NP23 5SD
United Kingdom
T +44 (0)1495 308185
uk.water@kiwa.com
www.kiwa.co.uk

Certificate Issued to:
Cetetherm AB
Fridhemsvagen 15
SE-372 38
Ronneby
Sweden



KUKreg4

Page 1 of 2

Figure 24 - Water regulation 4 certificate

15 BIBLIOGRAPHY

- [1] *BESA (Building Engineering Services Association) UK HIU (Heat Interface Unit) Test regime Technical Specification, V3-Rev001 September 2023*
- [2] *Technical Standard for UK HIU Test Regime - Space Heating, High Temperature, Indirect HEATING MODULE 1-DH70 Indirect, Version 1: 2023*
- [3] *Technical Standard for UK HIU Test Regime - Space Heating, Low Temperature, Indirect HEATING MODULE 2-DH55 Indirect, Version 1: 2023*
- [4] *Technical Standard for UK HIU Test Regime - Domestic Hot Water, High Temperature, Keep Warm HOT WATER MODULE 7-DH70-KWarm, Version 1: 2023*
- [5] *Technical Standard for UK HIU Test Regime - Domestic Hot Water, Low Temperature, Keep Warm HOT WATER MODULE 8-DH55-KWarm, Version 1: 2023*

Report Issue No	Reason for Report Update
1	

THIS PAGE IS INTENTIONALLY LEFT BLANK

THIS PAGE IS INTENTIONALLY LEFT BLANK



1 Malmo Road
Sutton Fields
Kingston upon Hull, HU7 0YF

+44 (0) 1482 877500
enertekinternational.com
Registered in England No. 2262638

EUA
energy&utilities alliance

HHIC
HEATING & HOTWATER
INDUSTRY COUNCIL